

## DESCRIPTION



The Q-Box is Casambi enabled DALI terminal block with slim body for easy and quick installation.

<b>Part No.</b>	Q-BOX
<b>Power Supply Mode</b>	220-240 VAC 50Hz
<b>DALI output current</b>	20mA
<b>Operating conditions</b>	Temp: 0°C- +40°C
<b>Radio Transceiver</b>	Max output power: +8dBm, Frequency: 2.402-2.480GHZ
<b>max. DALI addresses</b>	6
<b>Casambi CBM</b>	CBM003
<b>Lifetime</b>	5 Years




## SPECIFICATIONS/ KEY FEATURES

- Luminaire connection & DALI power supply combined
- Integrated CASAMBI-CBM003-radio module
- 5 poles for power supply and DALI (suitable for daisy-chain wiring)
- Up to 6 DALI-channels
- Different fixing and earthing variants
- ENEC approved
- Complete luminaire connector 16A (up to 2.5 mm<sup>2</sup> )
- Earth tag available
- Designed for automatic robot wiring
- Connection of 2 DALI devices directly at the terminal
- Screwless plug-in contacts (suitable for flexible and rigid wires)

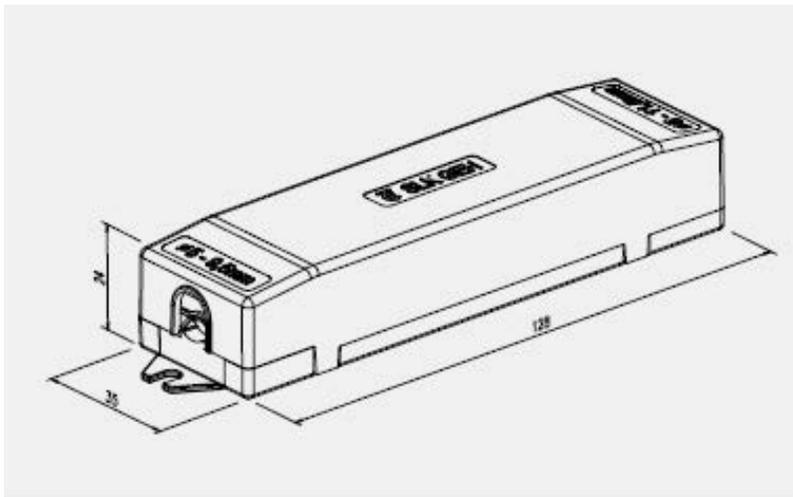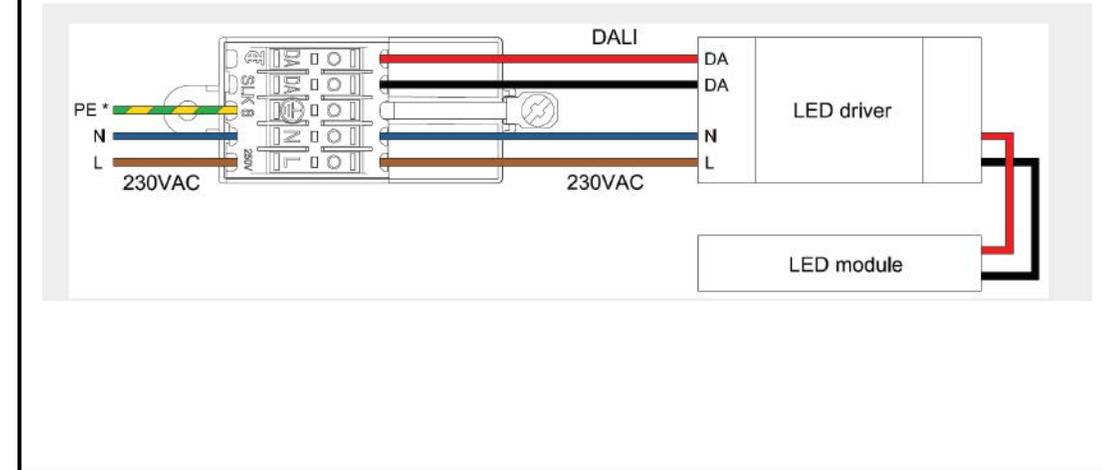


Eindrängige Leiter 0,5 – 2,5 mm<sup>2</sup> | Solid wires 0.5 – 2.5 mm<sup>2</sup>  
 Starre mehrdrängige Leiter 1,5 - 2,5 mm<sup>2</sup>  
 Rigid stranded wires 1.5 - 2.5mm<sup>2</sup>

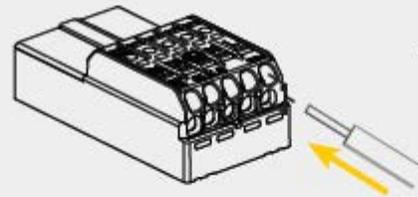

Leiter bis zum Anschlag einführen  
 Insert wire to the back end

Flexible Leiter 0,5 - 2,5 mm<sup>2</sup> (nur obere Anschlüsse)  
 Flexible wires 0.5 - 2.5 mm<sup>2</sup> (upper terminals only)

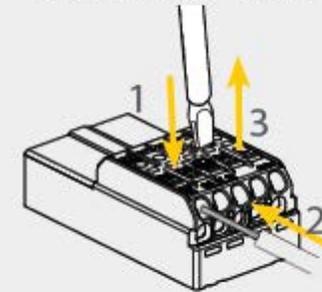

- 1 Drücker betätigen  
Push button
- 2 Leiter einführen  
Insert wire
- 3 Drücker lösen  
Release button