




THIS DOCUMENT CONTAINS INFORMATION THAT IS CONFIDENTIAL AND/OR PROPRIETARY TO DONALDSON COMPANY, INC. ALL RIGHTS TO DISCLOSE, COPY, REPRODUCE, MANUFACTURE FROM OR DISPOSE OF THIS DOCUMENT OR ITS CONTENTS ARE RESERVED UNLESS SPECIFIED IN WRITING BY DONALDSON.

DWG NO.			1
REV	ZONE	REVISION DESCRIPTION	APPROVAL/DATE
1		RELEASED TO PRODUCTION	ROBERTS FEB 08, 2024

SPECIFICATIONS RDB 3000


FINISH _____ SEE NOTE 4
 FLOW RATE _____ 3,000 CFM
 GRATING RATING _____ 75 POUNDS PER SQ FT
 APPROXIMATE WEIGHT _____ 550 POUNDS

- NOTES:
- DO NOT INSTALL OR OPERATE THIS EQUIPMENT UNTIL YOU HAVE READ AND UNDERSTOOD THE INSTRUCTIONS AND WARNINGS IN THE INSTALLATION MANUAL. FOR A REPLACEMENT MANUAL CONTACT DONALDSON CO IN. (800-365-1331)
 - ANCHOR BOLTS BY OTHERS PER LOCAL CODES.
 - THIS UNIT IS EQUIPPED WITH A RUBBER NON-SCRATCH WORK SURFACE.
 - COLLECTOR IS 304L SS WITH A #7 (320 GRIT) POLISHED FINISH.
 - STANDARD WELDS GROUND SMOOTH. SOME STITCH WELDING INCLUDED.

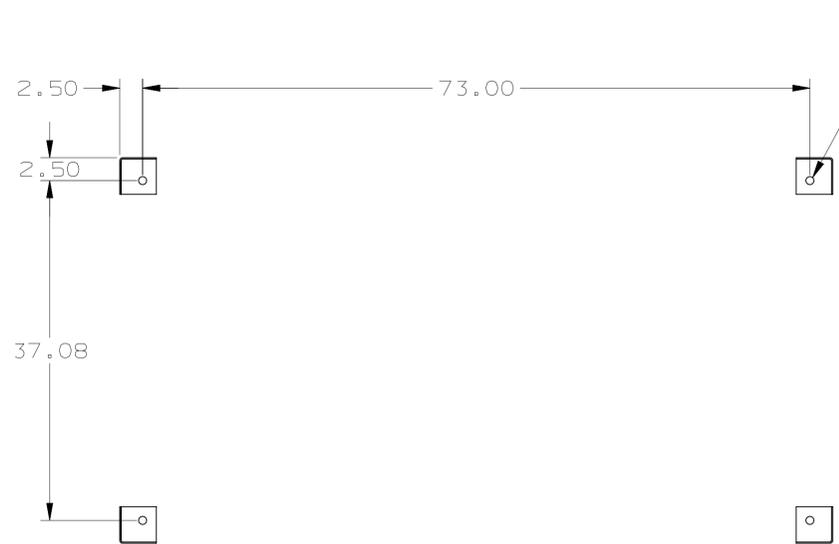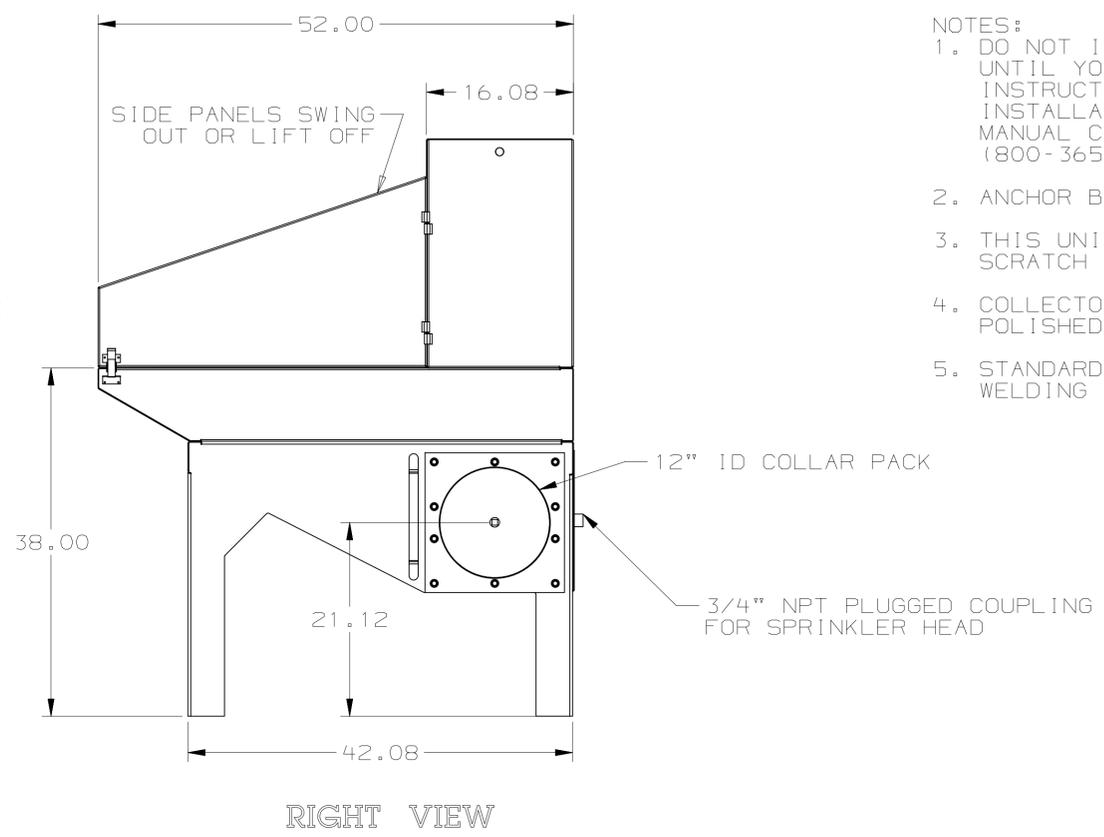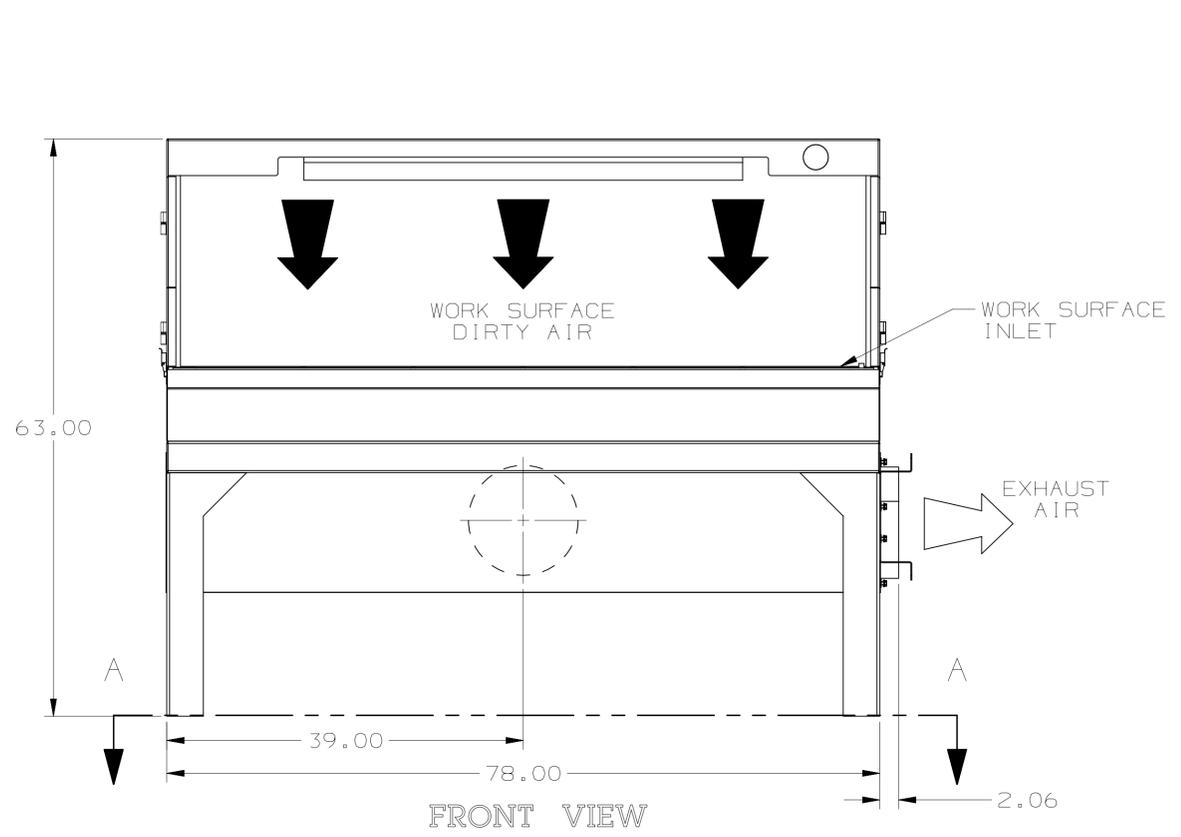

FRONT OF COLLECTOR
SECTION A-A
ANCHOR BOLT
PATTERN

.88 DIAMETER HOLE THRU .25 THICK PLATE FOR CUSTOMER SUPPLIED FASTENERS. ANCHORING REQUIREMENTS PER LOCAL CODES.

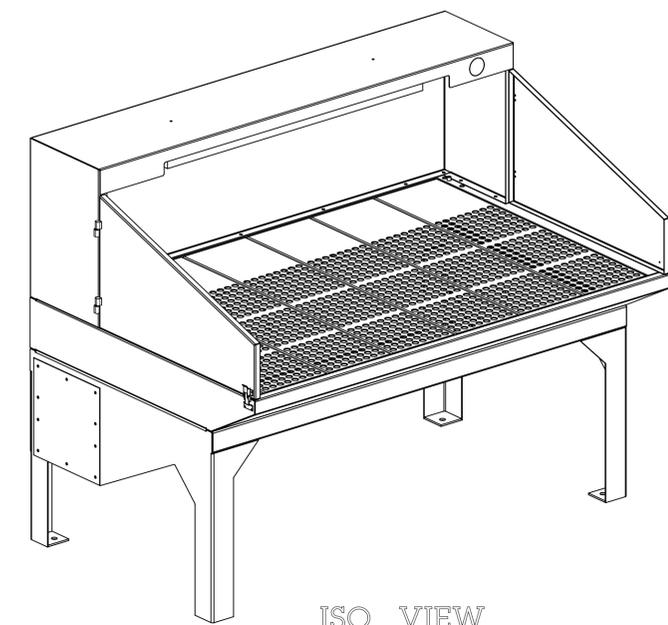

ISO VIEW

MATERIAL	RELEASE NO.	TITLE RDB 3000 DUST COLLECTOR 304L SS		 Donaldson Co., Inc. Minneapolis, MN USA IAF VERSION A
REFERENCE	DATE DEC 11, 2023	NUMBER IG17327896L018		
TOLERANCES PER QP4270.01	CHK	SCALE	SHEET 1 OF 1	
PREVIOUS DRAWING NO.	APVD	C/C	NX/CADD	
DO NOT SCALE	TOLERANCES UNLESS OTHERWISE SPECIFIED	2 PL ± 3 PL ± ANGLES ±°	DATE	DESIGN CONTROL A507 DWG LOCATION A888 COPYRIGHT © DONALDSON COMPANY, INC.
		THIRD ANGLE PROJECTION		REVISION 1 L D