

**GOVERNMENT CENTER PARKING EXPANSION
LAUDERDALE CO. BID NO. 4033
LAUDERDALE COUNTY, MISSISSIPPI**

**LAUDERDALE COUNTY BOARD OF SUPERVISORS
MERIDIAN, MISSISSIPPI**

ADDENDUM NO. 1

TO: **ALL BIDDERS ON THE ABOVE REFERENCED PROJECT**


FROM: Richmond L. Alexander, P.E.

DATE: March 24, 2026

SUBJECT: **ADDENDUM NO. 1**

Revisions to Proposal and Contract Documents and Plans for the referenced project are as follows:

1. **REPLACE** The Proposal Form in the Contract Documents with the Attached Proposal Form labeled ADDENDUM NO. 1 3-24-26. Addendum adds Pay Item No. 13 for Combination Concrete Curb & Gutter, Type 1 as shown in the detail below

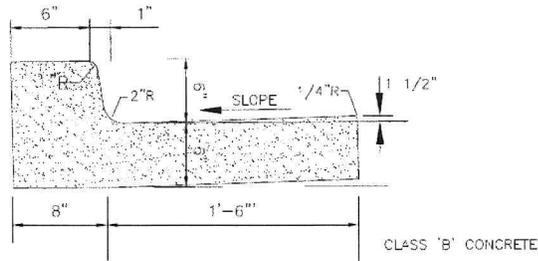

NOTE: COMBINATION CURB &
GUTTER PER MDOT STANDARD NO.
287

TYPE "1" CURB & GUTTER
NOT TO SCALE

Submitted By:

Richmond L. Alexander, P.E.

Project Engineer
Date: March 24, 2026

Acknowledged by:

Contractor's signature

Date

THIS ADDENDUM SHALL BE SIGNED, DATED AND SUBMITTED WITH BID DOCUMENTS. FAILURE TO PROPERLY ACKNOWLEDGE RECEIPT OF THIS ADDENDUM AND ATTACH IT TO BID DOCUMENTS SHALL BE GROUNDS FOR REJECTING PROPOSAL.

PROPOSAL FOR
 GOVERNMENT CENTER PARKING EXPANSION
 Lauderdale County Bid No. 4033
 LAUDERDALE COUNTY BOARD OF SUPERVISORS
 BID DATE: Friday, April 10, 2026, 10:00 am

PAY ITEM NO.	BID	ESTIMATED QUANTITY	UNIT	UNIT COST	TOTAL
	PAY ITEM				
BASE BID					
1	Mobilization	1	LS	\$	\$
2	Adjustment/Relocation of Existing Utilities	1	LS	\$	\$
3	Demolition of Existing Curb & Gutter	110	LF	\$	\$
4	Demolition of Existing Concrete Sidewalk	20	SY	\$	\$
5	Topsoil Removal	500	CY	\$	\$
6	Borrow Excavation (FM) (Includes Grading)	1,320	CY	\$	\$
7	Crushed Stone (Size No. 610)	415	CY	\$	\$
8	Hot Mix Asphalt Base Course, 19mm	430	TON	\$	\$
9	Hot Mix Asphalt Surface Course, 9.5mm	285	TON	\$	\$
10	Tie to Existing Asphalt Pavement	2	EA	\$	\$
11	3' Concrete Sidewalk (4" Thick)	35	SY	\$	\$
12	Concrete Sidewalk Ramp (Thickness Varies)	20	SY	\$	\$
13	Combination Concrete Curb & Gutter, Type 1	190	LF	\$	\$
14	6" Wide Parking Stall Traffic Stripe (White)	1,300	LF	\$	\$
15	6" Wide Parking Stall Traffic Stripe (Blue)	575	LF	\$	\$
16	Handicap Parking Symbol (Painted)	12	EA	\$	\$
17	Raise Existing Inlet	1	EA	\$	\$
18	Solid Sod	2,150	SY	\$	\$
BASE BID TOTAL:					\$
ADDITIVE ALTERNATE NO. 1					
19	7' Tall Ornamental Fence	445	LF	\$	\$
20	Operable Slide Gate w/ Operator	2	EA	\$	\$
21	7' Tall Ornamental Access Gate	1	EA	\$	\$
ADD ALT. NO. 1 TOTAL:					\$
BID GRAND TOTAL:					\$

- 1) The project pay items are provided to be inclusive of all work to be performed as shown in the drawings. All incidental work required to complete the project is to be included in the costs of performing these items.
- 2) Contract time shall be 60 calendar days for the Base bid. An additional 30 Days for Add Alt 1; The contract time will begin in 10 days from the Notice to Proceed or the first day the contractor mobilizes to the site, whichever comes first.