



**UNILOCK®**

2025  
**PRODUCT  
DATA**

T R A N S F O R M I N G   H A R D S C A P E S

# ELEVATE YOUR CRAFT WITH **U**VISION 3D LANDSCAPE CREATOR.



**U**VISION ALLOWS YOU TO VISUALLY  
COMMUNICATE YOUR DESIGN IDEAS  
TO YOUR CLIENT IN BOTH 2D PLAN  
VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator** is an easy-to-use software that helps bring your designs ideas to life.



Scan the QR code  
for more information  
or to download a free  
30-day trial.

**U**VISION<sup>®</sup>  
— 3D LANDSCAPE CREATOR —

# TABLE OF CONTENTS

## PAVERS

Arcana™	4
Artline™	5
Beacon Hill™ Flagstone	7
Beacon Hill™ Smooth	9
Bristol Valley®	12
Brussels Block®	13
Copthorne®	14
Courtstone®	15
Eco-Hex™	16
Eco-Priora™	17
Eco-Promenade® Ecoterra	19
Eco-Promenade®	20
Granito™	22
Hex™	23
Holland Premier™	24
Hollandstone™	25
Il Campo®	26
Mattoni™	27
Natural Stone	28
Nordic Cobble™	36
Porcelain	37
Promenade™	39
Richcliff®	42
Series™	43
Skyline™	44
Soreno™	45
Thornbury™	46
Town Hall®	47
Treo® Smooth	48
Tribeca Cobble™	49
Turfstone™	50
Umbriano®	51
Urban™	57
Westport™	60

## RETAINING WALLS

Brussels Dimensional Stone®	61
DuraHold®	62
DuraHold2®	64
Estate Wall™	65
Lineo™ Dimensional Stone	66
Pisa™	67
Pisa™ Smooth XL	68
Quarry™ Smooth	69
Rivercrest®	70
SienaEdge™	72
SienaStone™	73
U-Cara®	76

## COPING, STEPS, PILLAR CAPS

Beacon Hill™	85
Brussels Fullnose™	86
Ledgestone™	87
Umbriano®	89
Universal	90
Urban™	91

## FIRE FEATURES

Sunset Fire Pit	92
Unilock Elements	93

## ACCESSORIES

Skyview™	95
Paver Cleaners	96
Paver Sealers	96
Adhesives	97
Sands	98
Edge Restraints	100
DriveGrid, Gator Grid & Gator Base	101
Large Equipment (Unilyft)	102

## PRODUCT & INSTALLATION INFORMATION

Bedding Chart / Basic Depth	104
Important Notes	105
Finishes	106

## DESCRIPTION OF EDGE DETAILS



Zero-Edge



Chamfered Edge



Rounded Bevel



Micro Bevel



## APPLICATIONS

Pedestrian, Roof Deck

## APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth

Joint Spacing - 0 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 1782

Eligible for LEED v4.1 credits

**// Perfect for roof decks and other raised floor applications.**


Ask us about our Skyview™ pedestal system.  
See page 95 for more information.

SLAB SPACERS




X & T Slab Spacers  
Bagged Separately

LAYING PATTERNS




Random A



Random C

SINGLE UNITS



**12 x 24**  
301 x 606 x 50mm  
11<sup>7</sup>/<sub>8</sub> x 23<sup>7</sup>/<sub>8</sub> x 2"  
18 Units/Bundle  
2 Sq.Ft./Stone



**18 x 24**  
453 x 606 x 50mm  
17<sup>7</sup>/<sub>8</sub> x 23<sup>7</sup>/<sub>8</sub> x 2"  
18 Units/Bundle  
3 Sq.Ft./Stone



**24 x 24**  
606 x 606 x 50mm  
23<sup>7</sup>/<sub>8</sub> x 23<sup>7</sup>/<sub>8</sub> x 2"  
18 Units/Bundle  
4 Sq.Ft./Stone

	12 x 24	18 x 24	24 x 24
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	50 mm	50 mm	50 mm

SQFT PER	Bundle	36.00	54.00	72.00
	Layer	2.00	3.00	4.00
	Sections	-	-	-
	Stone	2.00	3.00	4.00

PER BUNDLE	Layers	18.00	18.00	18.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.99	0.99	0.99
	Sections	-	-	-
	Layer	1.98	2.97	3.98
	Bundle	35.55	53.50	71.57

SAILOR LNFT PER	SqFt	1.99	1.33	0.99
	Sections	-	-	-
	Layer	3.98	3.98	3.98
	Bundle	71.57	71.57	71.57

UNITS PER	SqFt	0.50	0.33	0.25
	Sections	-	-	-
	Bundle	18.00	18.00	18.00

LBS PER	Layer	48	72	96
	Sections	-	-	-
	Bundle	864	1,296	1,728

Colors	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	SO	SO	SO
Corvara	SR .32 SRI 34	SO	SO	SO
Modena	SR .46 SRI 53	SO	SO	SO
Vivanto	SR .18 SRI 16	SO	SO	SO



AVORIO



CORVARA



MODENA



VIVANTO

**Notes:** Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. Product is not intended for vehicular applications. All measurements are nominal. Unilock recommends to install Arcana using T and X Slab spacers. Please contact your Territory Manager for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Micro



Surface Texture - Smooth and Brushed

Joint Spacing - 3 mm


## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

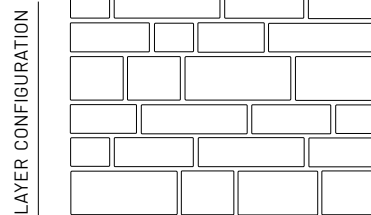

Artline Random A

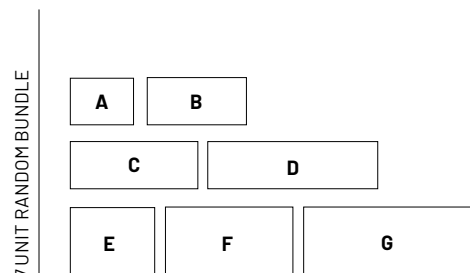

**UNIT A**  
125 x 169 x 70mm  
4 7/8 x 6 3/4 x 2 3/4"  
32 Units/Bundle  
.23 Sq.Ft./Stone

**UNIT E**  
187.5 x 225 x 70mm  
7 1/2 x 8 7/8 x 2 3/4"  
32 Units/Bundle  
.45 Sq.Ft./Stone

**UNIT B**  
125 x 262.5 x 70mm  
4 7/8 x 10 3/8 x 2 3/4"  
32 Units/Bundle  
.35 Sq.Ft./Stone

**UNIT F**  
187.5 x 337.5 x 70mm  
7 1/2 x 13 3/8 x 2 3/4"  
16 Units/Bundle  
.58 Sq.Ft./Stone

**UNIT C**  
125 x 337.5 x 70mm  
4 7/8 x 13 3/8 x 2 3/4"  
32 Units/Bundle  
.45 Sq.Ft./Stone

**UNIT G**  
187.5 x 450 x 70mm  
7 1/2 x 17 3/4 x 2 3/4"  
16 Units/Bundle  
.91 Sq.Ft./Stone

**UNIT D**  
125 x 450 x 70mm  
4 7/8 x 17 3/4 x 2 3/4"  
32 Units/Bundle  
.61 Sq.Ft./Stone

MULTIPLE SIZES	
Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	70 mm

SQFT PER	Bundle	93.25
	Layer	11.66
	Section	-
	Stone	0.49

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.06
	Section	-
	Bundle	192.00

LBS PER	Layer	373
	Section	-
	Bundle	2,986

Colors	Reflectance	Stock
Birch	SR .28 SRI 30	✓
Granite Fusion	SR .28 SRI 29	✓
Granite Fusion (IL Campo Finish)	SR .28 SRI 29	SO



BIRCH



GRANITE FUSION



GRANITE FUSION  
(IL Campo Finish)

Notes: IL Campo finish is a Special Order (SO) - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Micro

Surface Texture - Umbriano Mottled


Joint Spacing - 3 mm

## TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYER CONFIGURATION




LAYING PATTERNS



Artline Random A

7 UNIT RANDOM BUNDLE

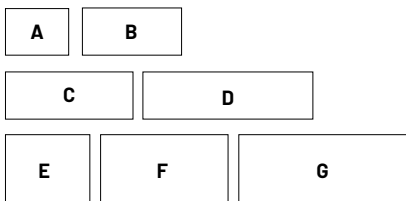

### UNIT A

125 x 169 x 70mm  
4 7/8 x 6 7/8 x 2 3/4"  
32 Units/Bundle  
.23 Sq.Ft./Stone

### UNIT E

187.5 x 225 x 70mm  
7 3/8 x 8 7/8 x 2 3/4"  
32 Units/Bundle  
.45 Sq.Ft./Stone

### UNIT B

125 x 262.5 x 70mm  
4 7/8 x 10 3/8 x 2 3/4"  
32 Units/Bundle  
.35 Sq.Ft./Stone

### UNIT F

187.5 x 337.5 x 70mm  
7 3/8 x 13 3/8 x 2 3/4"  
16 Units/Bundle  
.58 Sq.Ft./Stone

### UNIT C

125 x 337.5 x 70mm  
4 7/8 x 13 1/4 x 2 3/4"  
32 Units/Bundle  
.45 Sq.Ft./Stone

### UNIT G

187.5 x 450 x 70mm  
7 3/8 x 17 1/4 x 2 3/4"  
16 Units/Bundle  
.91 Sq.Ft./Stone

### UNIT D

125 x 450 x 70mm  
4 7/8 x 17 3/4 x 2 3/4"  
32 Units/Bundle  
.61 Sq.Ft./Stone

MULTIPLE SIZES	
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 mm

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	0.49

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.06
	Sections	-
	Bundle	192.00

LBS PER	Layer	414
	Sections	-
	Bundle	3,310

Colors	Reflectance	Stock
French Grey	SR .35 SRI 38	SO
Midnight Sky	SR .35 SRI 38	SO
Winter Marvel	SR .18 SRI 17	SO



FRENCH GREY



MIDNIGHT SKY



WINTER MARVEL

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

# Beacon Hill™ Flagstone 60mm

ENDURACOLOR™



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	60 mm

SQFT PER	Bundle	104.91
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	9.00
	Sections	-




SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	84.15

UNITS PER	SqFt	0.69
	Section	-
	Bundle	72.00

LBS PER	Layer	320
	Section	-
	Bundle	2,879

Colors	Reflectance	Stock
Birch	SR n/a SRI n/a	✓
Fossil	SR .22 SRI 21	✓
Granite Fusion	SR .30 SRI 32	✓
Sierra	SR n/a SRI n/a	✓

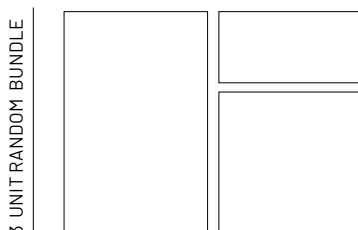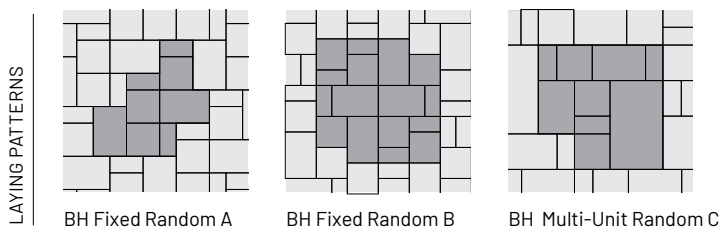

**LARGE RECTANGLE**  
380 x 570 x 60mm  
15 x 22 1/2 x 2 3/8"  
18 Units/Bundle  
2.08 SqFt/Stone

**SQUARE**  
380 x 380 x 60mm  
15 x 15 x 2 3/8"  
27 Units/Bundle  
1.39 Sq.Ft./Stone

**SMALL RECTANGLE**  
380 x 190 x 60mm  
15 x 7 1/2 x 2 3/8"  
27 Units/Bundle  
.69 Sq.Ft./Stone



Notes: SOLD IN FULL BUNDLES ONLY. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 4 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	OHIO
Thickness (mm)	80 mm

SQFT PER	Bundle	73.22
	Layer	10.46
	Sections	-
	Stone	1.31

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	0.85
	Sections	-
	Layer	8.86
	Bundle	62.00

UNITS PER	SqFt	0.76
	Sections	-
	Bundle	56.00


LBS PER	Layer	362
	Sections	-
	Bundle	2,548

Colors	Reflectance	Stock
Birch	SR n/a SRI n/a	SO
Fossil	SR .22 SRI 21	SO
Granite Fusion	SR .30 SRI 32	SO
Sierra	SR n/a SRI n/a	SO


LAYER CONFIGURATION




LAYING PATTERNS



BH Fixed Random A




BH Fixed Random B



BH Multi-Unit Random C

3 UNIT RANDOM BUNDLE



### LARGE RECTANGLE

360 x 540 x 80mm  
14 x 21 x 3 1/8"  
14 Units/Bundle  
2.09 Sq.Ft./Stone

### SQUARE

360 x 360 x 80mm  
14 x 14 x 3 1/8"  
21 Units/Bundle  
1.40 Sq.Ft./Stone

### SMALL RECTANGLE

180 x 360 x 80mm  
7 x 14 x 3 1/8"  
21 Units/Bundle  
0.70 Sq.Ft./Stone



BIRCH



FOSSIL



SIERRA



GRANITE FUSION

**Notes:** Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Rounded





Surface Texture - Smooth

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

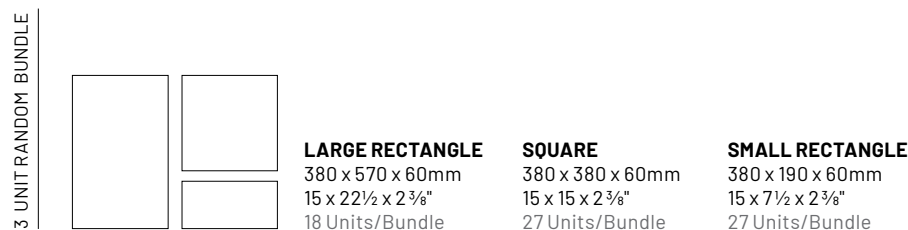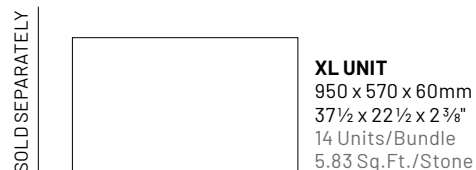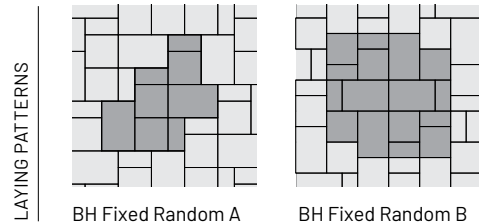

			XL	SMALL RECTANGLE
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
	Thickness (mm)	60 mm	60 mm	60 mm
SQFT PER	Bundle	104.91	81.60	104.91
	Layer	11.66	11.66	11.66
	Section	-	-	-
	Stone	1.46	5.83	0.78
PER BUNDLE	Layers	9.00	7.00	9.00
	Sections	-	-	-
SOLDIER LNFT PER	SqFt	-	0.32	0.80
	Section	-	-	-
	Layer	-	3.74	9.35
	Bundle	-	26.18	84.15
SAILOR LNFT PER	SqFt	0.80	0.53	1.60
	Section	-	-	-
	Layer	9.35	6.23	18.70
	Bundle	84.15	43.61	168.31
UNITS PER	SqFt	0.69	0.17	1.29
	Section	-	-	-
	Bundle	72.00	14.00	135.00
LBS PER	Layer	320	320	320
	Section	-	-	-
	Bundle	2,879	2,239	2,879

Colors	Reflectance	Stock	Stock	Stock
Birch	SR n/a SRI 30	✓	-	-
Dark Charcoal	SR n/a SRI n/a	-	-	✓
Fossil	SR n/a SRI 21	✓	✓	✓
Granite Fusion	SR .28 SRI 29	✓	✓	✓
Grindstone	SR n/a SRI n/a	✓	-	-
Oat Beige	SR n/a SRI n/a	✓	-	✓
Opal Blend	SR .24 SRI 24	✓	✓	✓



**Notes: SOLD IN FULL BUNDLES ONLY.** XL unit is produced and sold on a required refundable skid. This product is not intended for vehicular applications. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		SMALL RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	104.91	104.91
	Layer	11.66	11.66
	Section	-	-
	Stone	1.46	0.78

PER BUNDLE	Layers	9.00	9.00
	Sections	-	-



SOLDIER LNFT PER	SqFt	-	0.80
	Section	-	-
	Layer	-	9.35
	Bundle	-	84.15

SAILOR LNFT PER	SqFt	0.80	1.60
	Section	-	-
	Layer	9.35	18.70
	Bundle	84.15	168.31

UNITS PER	SqFt	0.69	1.29
	Section	-	-
	Bundle	72.00	135.00

LBS PER	Layer	320	320
	Section	-	-
	Bundle	2,879	2,879

Colors	Reflectance	Stock	Stock
Oat Beige	SR n/a SRI n/a	SO	SO
Opal Blend	SR .24 SRI 24	SO	SO
Platinum	SR .30 SRI 32	SO	SO

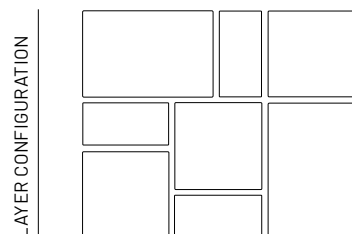


**LARGE RECTANGLE**  
380 x 570 x 60mm  
15 x 22 1/2 x 2 3/8"  
18 Units/Bundle

**SQUARE**  
380 x 380 x 60mm  
15 x 15 x 2 3/8"  
27 Units/Bundle

**SMALL RECTANGLE**  
380 x 190 x 60mm  
15 x 7 1/2 x 2 3/8"  
27 Units/Bundle

SOLD SEPARATELY



**SMALL RECTANGLE**  
380 x 190 x 60mm  
15 x 7 1/2 x 2 3/8"  
150 Units/Bundle  
.78 Sq.Ft./Stone



OAT BEIGE



OPAL BLEND



PLATINUM

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY. XL unit is produced and sold on a required refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded



Surface Texture - Smooth

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

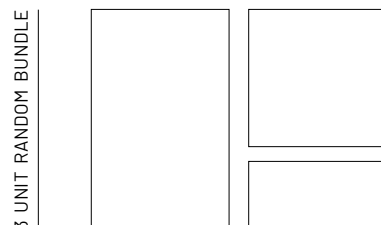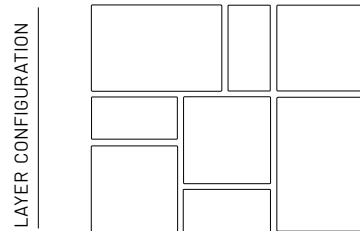

**LARGE RECTANGLE**  
360 x 540 x 80mm  
14 1/8 x 21 1/4 x 3 1/8"  
14 Units/Bundle

**SQUARE**  
360 x 360 x 80mm  
14 1/8 x 14 1/8 x 3 1/8"  
21 Units/Bundle

**SMALL RECTANGLE**  
360 x 180 x 80mm  
14 1/8 x 7 1/16 x 3 1/8"  
21 Units/Bundle

Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	80 mm

SQFT PER	Bundle	73.22
	Layer	10.46
	Section	-
	Stone	1.31

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.85
	Section	-
	Layer	8.86
	Bundle	62.01

UNITS PER	SqFt	0.76
	Section	-
	Bundle	56.00

LBS PER	Layer	383
	Section	-
	Bundle	2,679


Colors	Reflectance	Stock
Fossil	SR n/a SRI 21	✓
Granite Fusion	SR .28 SRI 29	✓



FOSSIL



GRANITE FUSION

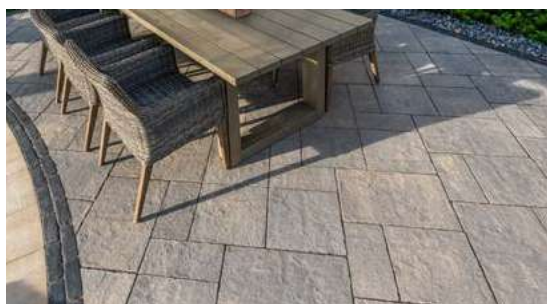

## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Zero

Surface Texture - Textured


Joint Spacing - 7 mm

## TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits


LAYER CONFIGURATION



LAYING PATTERNS




BV Fixed Random A



BV Fixed Random B

3 UNIT RANDOM BUNDLE



### LARGE RECTANGLE

380 x 570 x 60mm  
15 x 22 1/2 x 2 3/8"  
20 Units/Bundle  
2.08 SqFt./Stone

### SQUARE

380 x 380 x 60mm  
15 x 15 x 2 3/8"  
30 Units/Bundle  
1.39 Sq.Ft./Stone

### SMALL RECTANGLE

380 x 190 x 60mm  
15 x 7 1/2 x 2 3/8"  
30 Units/Bundle  
.69 Sq.Ft./Stone

Bundle Type	RANDOM
Plant Produced	HARRISON
Thickness (mm)	60 mm

SQFT PER	Bundle	116.57
	Layer	11.66
	Section	-
	Stone	1.46

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Section	-
	Layer	9.35
	Bundle	93.50

UNITS PER	SqFt	0.69
	Section	-
	Bundle	80.00

LBS PER	Layer	311
	Section	-
	Bundle	3,113

Colors	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Steel Mountain	SR n/a SRI n/a	✓



BAVARIAN



FOSSIL



STEEL MOUNTAIN

**Notes: SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

# Brussels Block®



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Zero







Surface Texture - Weathered

Joint Spacing - 2 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

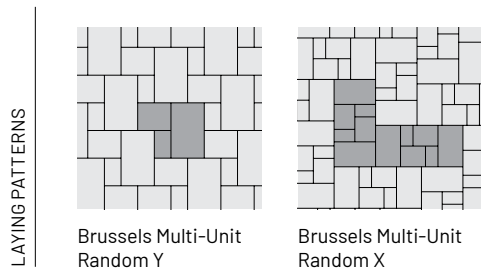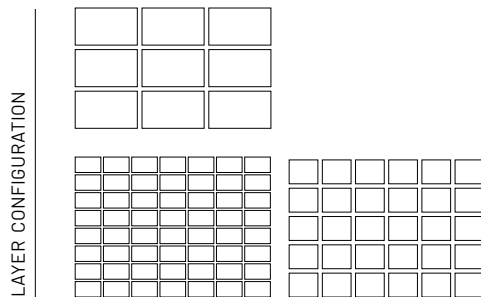

	HALF	STANDARD	XL
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	70 mm	70 mm	70 mm

SQFT PER	Bundle	99.79	95.94	95.94
	Layer	12.47	11.99	9.59
	Section	14.26	15.99	-
	Stone	0.20	0.40	0.80

PER BUNDLE	Layers	8.00	8.00	10.00
	Sections	7.00	6.00	-

SOLDIER LNFT PER	SqFt	1.72	1.42	0.85
	Section	24.57	22.70	-
	Layer	21.50	17.03	8.19
	Bundle	172.00	136.22	81.90

SAILOR LNFT PER	SqFt	2.95	1.71	1.43
	Section	42.04	27.30	-
	Layer	36.79	20.47	13.70
	Bundle	294.30	163.78	137.00

UNITS PER	SqFt	5.05	2.50	1.25
	Section	72.00	40.00	-
	Bundle	504.00	240.00	120.00

LBS PER	Layer	399	384	307
	Section	457	512	-
	Bundle	3,195	3,072	3,072

Colors	Reflectance	Stock	Stock	Stock
Charcoal	SR n/a SRI n/a	✓	-	-
Limestone	SR .28 SRI 29	✓	✓	✓
Mahogany Ash	SR n/a SRI n/a	✓	✓	✓
Coffee Creek	SR n/a SRI n/a	✓	✓	✓
Sandstone	SR .41 SRI 46	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓



CHARCOAL



LIMESTONE



MAHOGANY ASH



COFFEE CREEK



SANDSTONE



SIERRA

Notes: SOLD IN FULL BUNDLES ONLY. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

## APPEARANCE

Edge Detail - n/a

Surface Texture - Textured

Joint Spacing - 3 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	60 mm

SQFT PER	Bundle	89.20
	Layer	11.15
	Section	-
	Stone	0.15

PER BUNDLE	Layers	8.00
	Sections	-


SOLDIER LNFT PER	SqFt	1.43
	Section	-
	Layer	15.99
	Bundle	127.95

SAILOR LNFT PER	SqFt	4.41
	Section	-
	Layer	49.21
	Bundle	393.70

UNITS PER	SqFt	6.73
	Section	-
	Bundle	600.00

LBS PER	Layer	294
	Section	-
	Bundle	2,349

Colors	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓
Steel Blue	SR n/a SRI n/a	✓

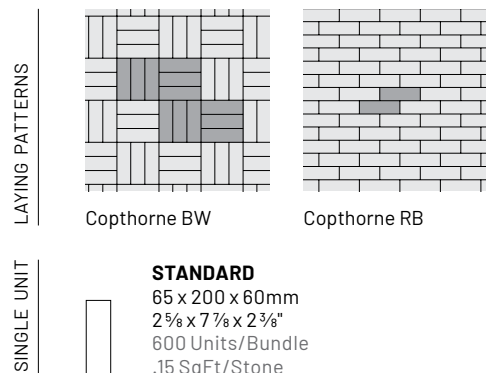



## APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Textured

Joint Spacing - 15 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	AYR
Thickness (mm)	60 mm

SQFT PER	Bundle	98.30
	Layer	12.29
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	2.25
	Sections	-
	Layer	27.69
	Bundle	221.52

UNITS PER	SqFt	3.91
	Sections	-
	Bundle	384.00

LBS PER	Layer	291
	Sections	-
	Bundle	2,326

Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Belgian Blue	SR n/a SRI n/a	SO
Basalt / Belgian Blue	SR n/a SRI n/a	SO
Dawn Mist	SR n/a SRI n/a	SO
Pebble Taupe	SR n/a SRI n/a	SO

LAYING PATTERNS



Courtstone Fixed  
Random A



BASALT



BELGIAN BLUE



BASALT  
BELGIAN BLUE  
Blended on Site



DAWN MIST



PEBBLE TAUPE



DAWN MIST  
PEBBLE TAUPE  
Blended on Site

5 UNIT RANDOM BUNDLE



**XL RECTANGLE**  
215 x 130 x 60mm  
8 3/8 x 5 1/8 x 2 3/8"  
128 Units/Bundle  
.30 SqFt/Stone

**LARGE RECTANGLE**  
185 x 130 x 60mm  
7 1/4 x 5 1/8 x 2 3/8"  
64 Units/Bundle  
.28 SqFt/Stone

**RECTANGLE**  
165 x 130 x 60mm  
6 1/2 x 5 1/8 x 2 3/8"  
64 Units/Bundle  
.23 SqFt/Stone

**SMALL RECTANGLE**  
145 x 130 x 60mm  
5 3/4 x 5 1/8 x 2 3/8"  
64 Units/Bundle  
.20 SqFt/Stone

**SQUARE**  
130 x 130 x 60mm  
5 1/8 x 5 1/8 x 2 3/8"  
64 Units/Bundle  
.18 SqFt/Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**  
All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Permeable

## APPEARANCE

Edge Detail Umbriano - Rounded

Surface Texture - Umbriano

Joint Spacing - 2 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1

	8 x 8
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	60 mm

SQFT PER	Bundle	108.31
	Layer	10.83
	Sections	-
	Stone	0.45

PER BUNDLE	Layers	10.00
	Sections	-


SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.22
	Layer	24
	Bundle	240.00

LBS PER	Layer	276
	Sections	-
	Bundle	2,762


Colors	Reflectance	Stock
French Grey	SR .18 SRI 17	SO
Midnight Sky	SR .17 SRI 15	SO
Winter Marvel	SR .35 SRI 38	SO



FRENCH GREY




MIDNIGHT SKY




WINTER MARVEL

LAYER CONFIGURATION




LAYING PATTERNS



Hex Paver A

SINGLE UNIT



200 x 200 x 60mm  
7 7/8 x 7 7/8 x 2 3/8"  
216 Units/Bundle  
.45 SqFt/Stone



**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,  
Heavy-duty, Permeable

## APPEARANCE

Edge Detail - Micro  
Surface Texture - Smooth  
Joint Spacing - 7mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
Eligible for LEED v4.1 credits

	5 x 10
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	80 mm

SQFT PER	Bundle	75.95
	Layer	10.85
	Section	-
	Stone	0.31

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	13.78
	Bundle	96.46


SAILOR LNFT PER	SqFt	2.54
	Section	-
	Layer	27.56
	Bundle	192.91

UNITS PER	SqFt	3.23
	Section	-
	Bundle	245.00


LBS PER	Layer	397
	Section	-
	Bundle	2,778

Colors	Reflectance	Stock
Beechwood	SR .n/a SRI n/a	✓

LAYER CONFIGURATION

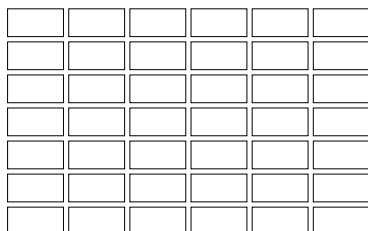

LAYING PATTERNS



EcoPriora 5x10 RB

SINGLE UNITS



**5 x 10**  
120 x 240 x 80mm  
4 ¾ x 9 ½ x 3 ⅛  
245 Units/Bundle  
.31 Sq.Ft./Stone



BEECHWOOD

**Notes: SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,  
Heavy-duty , Permeable

APPEARANCE

Edge Detail - Micro  
Surface Texture - Smooth  
Joint Spacing - 7mm

TECHNICAL INFORMATION

Conforms to ASTM C 936  
Eligible for LEED v4.1 credits

	5 x 10
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	80 mm

SQFT PER	Bundle	75.95
	Layer	10.85
	Section	-
	Stone	0.31

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	13.78
	Bundle	96.46


SAILOR LNFT PER	SqFt	2.54
	Section	-
	Layer	27.56
	Bundle	192.91

UNITS PER	SqFt	3.23
	Section	-
	Bundle	245.00


LBS PER	Layer	397
	Section	-
	Bundle	2,778

Colors	Reflectance	Stock
Fossil	SR .n/a SRI n/a	✓
Granite Fusion	SR .n/a SRI n/a	✓

LAYING PATTERNS



EcoPriora 5x10 RB



EcoPriora 5x10 HB

SINGLE UNITS



**5 x 10**  
120 x 240 x 80mm  
4 ¾ x 9 ½ x 3 ⅞  
245 Units/Bundle  
.31 Sq.Ft./Stone



FOSSIL



GRANITE

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on an optional, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Shot Blasted

Joint Spacing - n/a

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	4 x 12
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	80 mm

SQFT PER	Bundle	81.37
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	7.00
	Sections	-

SOLDIER LNFT PER	SqFt	3.00
	Section	-
	Layer	11.81
	Bundle	82.67

SAILOR LNFT PER	SqFt	0.32
	Section	-
	Layer	35.43
	Bundle	248.03

UNITS PER	SqFt	3.09
	Layer	36
	Bundle	252

LBS PER	Layer	360
	Section	-
	Bundle	2,516


Colors	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	SO
Light Steel Gray	SR n/a SRI n/a	SO




LIGHT OPAL BLEND

LIGHT STEEL GRAY

LAYING PATTERNS



Eco-Promenade  
4x12 RB



Eco-Promenade  
4x12 HB

SINGLE UNIT



**4 x 12**  
100 x 300 x 80mm  
3 7/8 x 11 7/8 x 3 1/8"  
252 units/Bundle  
.32 Sq.Ft./Stone

**Notes:** Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Permeable

## APPEARANCE

Edge Detail - Micro

Surface Texture - Series

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	3 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 mm

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46


UNITS PER	SqFt	3.10
	Section	-
	Bundle	288.00

LBS PER	Layer	426
	Section	-
	Bundle	3,404


Colors	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	SO
Nordic Star	SR n/a SRI n/a	SO



ARCTIC GREY




NORDIC STAR

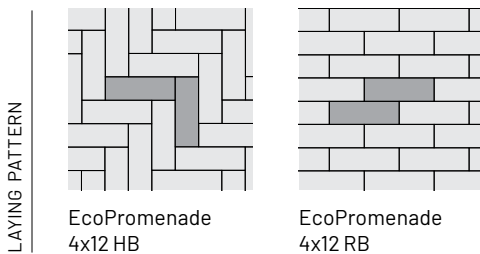

EcoPromenade  
4x12 HB

EcoPromenade  
4x12 RB



**3 x 12 PERMEABLE**  
100 x 300 x 80mm  
3 7/8 x 11 7/8 x 3 1/8"  
21 Units/Bundle  
0.70 Sq.Ft./Stone

**Notes:** Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on an optional, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Permeable

## APPEARANCE

Edge Detail - Micro

Surface Texture - Umbriano

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	3 x 12
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	80 mm

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Section	-
	Bundle	288.00

LBS PER	Layer	426
	Section	-
	Bundle	3,404


Colors	Reflectance	Stock
French Grey	SR .n/a SRI n/a	SO
Midnight Sky	SR .n/a SRI n/a	SO
Winter Marvel	SR .n/a SRI n/a	SO



FRENCH GREY




MIDNIGHT SKY




WINTER MARVEL

LAYING PATTERN



EcoPromenade  
4x12 HB



EcoPromenade  
4x12 RB

SINGLE UNIT



**3 x 12**  
100 x 300 x 80mm  
3 7/8 x 11 7/8 x 3 1/8"  
288 Units/Bundle  
0.32Sq.Ft./Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Granito Textured

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

		HEX
Bundle Type	RANDOM	SINGLE
Plant Produced	PICKERING	PICKERING
Thickness (mm)	60 mm	70 mm

SQFT PER	Bundle	94.14	73.92
	Layer	10.46	9.24
	Section	-	-
	Stone	-	2.6

PER BUNDLE	Layers	9.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
	Layer	-	-
	Bundle	-	-


SAILOR LNFT PER	SqFt	0.85	-
	Section	-	-
	Layer	8.86	-
	Bundle	79.72	-

UNITS PER	SqFt	-	0.39
	Section	-	-
	Bundle	72.00	192.00


LBS PER	Layer	287	306.24
	Section	-	-
	Bundle	2,583	2,450

Colors	Reflectance	Stock	Stock
Notte	SR n/a SRI n/a	SO	SO
Sabia	SR n/a SRI n/a	SO	SO
Scuro	SR n/a SRI n/a	SO	SO


LAYER CONFIGURATION

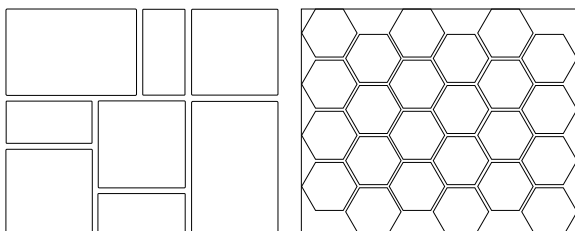

LAYING PATTERN




Granito Fixed Random A



Granito Hex Paver A

3-UNIT RANDOM BUNDLE




**SMALL RECTANGLE**  
180 x 360 x 60mm  
7 x 14 1/4 x 2 3/8"  
27 Units/Bundle

**SQUARE**  
360 x 360 x 60mm  
14 1/4 x 14 1/4 x 2 3/8"  
27 Units/Bundle

**LARGE RECTANGLE**  
360 x 540 x 60mm  
14 1/4 x 21 1/4 x 2 3/8"  
18 Units/Bundle

SINGLE UNIT



**HEX**  
200 x 200 x 70mm  
7 7/8 x 7 7/8 x 2 3/4"  
192 Units/Bundle  
.42 Sq.Ft./Stone

(Note: Only Hex is drive friendly)

**Notes:** Special Order (SO). Minimum quantities apply. **Lead time required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth

Joint Spacing - 3 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	8 x 8
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70 mm

SQFT PER	Bundle	73.92
	Layer	9.24
	Section	-
	Stone	0.39

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-


SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	2.60
	Section	-
	Bundle	192.00


LBS PER	Layer	306
	Section	-
	Bundle	2,450

Colors	Reflectance	Stock
Dark Charcoal	SR .n/a SRI n/a	✓
Granite Fusion	SR .n/a SRI n/a	✓

LAYER CONFIGURATION




LAYING PATTERNS



Hex Paver A

SINGLE UNIT



**8 x 8**

200 x 200 x 70mm


7 7/8 x 7 7/8 x 2 3/4"

192 Units/Bundle

.42 Sq.Ft./Stone



DARK CHARCOAL



GRANITE FUSION



## APPLICATIONS

Pedestrian, Light Vehicular, Borders and accents

## APPEARANCE

Edge Detail - Chamfer




Surface Texture - Smooth

Joint Spacing - 3 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

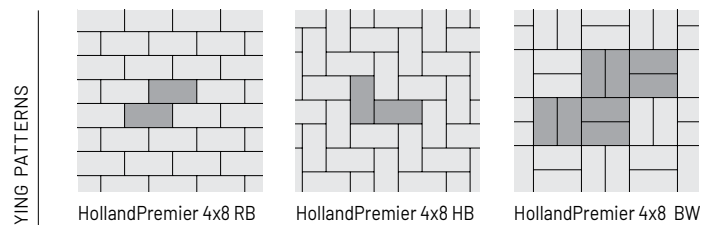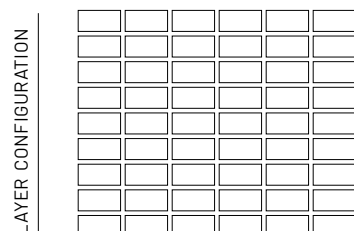

	4 x 8
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	60 mm

SQFT PER	Bundle	106.20
	Layer	11.80
	Section	17.70
	Stone	0.22

PER BUNDLE	Layers	9.00
	Sections	6.00

SOLDIER LNFT PER	SqFt	1.50
	Section	26.57
	Layer	17.72
	Bundle	159.45

SAILOR LNFT PER	SqFt	3.00
	Section	53.15
	Layer	35.43
	Bundle	318.90

UNITS PER	SqFt	4.58
	Section	81.00
	Bundle	486.00

LBS PER	Layer	324
	Section	486
	Bundle	2,914

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Charleston	SR n/a SRI n/a	✓
Fossil	SR .22 SRI 21	✓
Granite Fusion	SR n/a SRI n/a	✓
Indiana Buff	SR n/a SRI n/a	✓



Notes: SOLD IN FULL BUNDLES ONLY. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

# Hollandstone™



## APPLICATIONS

Pedestrian, Light Vehicular  
80mm only: Roadway Street, Heavy-duty

## APPEARANCE

Edge Detail - Chamfer  
Surface Texture - Smooth  
Joint Spacing - 3 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
Eligible for LEED v4.1 credits

	4 x 8	4 x 8
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	60 mm	80 mm

SQFT PER	Bundle	106.20	82.60
	Layer	11.80	11.80
	Section	17.70	13.77
	Stone	0.22	0.22

PER BUNDLE	Layers	9.00	7.00
	Sections	6.00	6.00



SOLDIER LNFT PER	SqFt	1.50	1.50
	Section	26.57	20.67
	Layer	17.72	17.71
	Bundle	159.45	124.00

SAILOR LNFT PER	SqFt	3.00	-
	Section	53.15	-
	Layer	35.43	-
	Bundle	318.90	-

UNITS PER	SqFt	4.58	4.58
	Section	81.00	63.00
	Bundle	486.00	378.00

LBS PER	Layer	324	426
	Section	486	497
	Bundle	2,914	2,985


Colors	Reflectance	Stock	Stock
Beechwood	SR n/a SRI n/a	✓	SO
Rustic Red	SR n/a SRI n/a	✓	SO
Terra Cotta	SR n/a SRI n/a	✓	SO

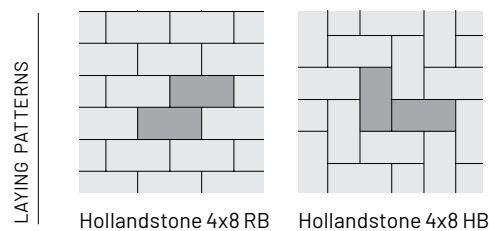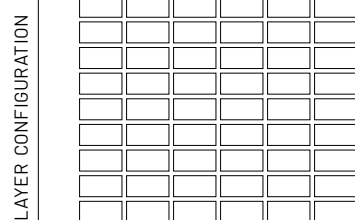

SINGLE UNIT	4 x 8	4 x 8
	100 x 200 x 60mm 3 7/8 x 7 7/8 x 2 3/8" 486 Units/Bundle .22 Sq.Ft./Stone	100 x 200 x 80mm 3 7/8 x 7 7/8 x 3 1/8" 378 Units/Bundle .22 Sq.Ft./Stone

(Note: Only 80mm is Roadway Street and Heavy Duty application)

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on an optional, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

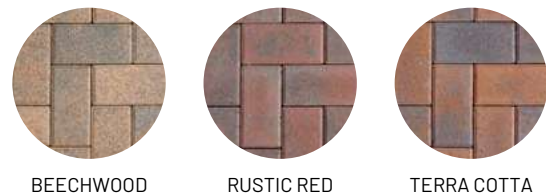



## APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,  
Border/Accents

## APPEARANCE

Edge Detail - Rounded  
Surface Texture - Il Campo® Brushed  
Joint Spacing - 3 mm

## TECHNICAL INFORMATION

Conforms to ASTM C936  
Eligible for LEED v4.1 credits

	4 x 8 BRUSHED
Bundle Type	SINGLE
Plant Produced	PICKERING
Thickness (mm)	70 mm

SQFT PER	Bundle	94.40
	Layer	11.80
	Section	15.73
	Stone	0.22

PER BUNDLE	Layers	8.00
	Sections	6.00


SOLDIER LNFT PER	SqFt	1.50
	Section	23.62
	Layer	17.72
	Bundle	141.73

SAILOR LNFT PER	SqFt	3.00
	Section	47.24
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	4.58
	Section	72.00
	Bundle	432.00


LBS PER	Layer	377
	Section	502
	Bundle	3,014

Colors	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓




DARK CHARCOAL

LAYING PATTERNS



Il Campo 4x8 RB



Il Campo 4x8 SB

SINGLE UNIT



**4 x 8**  
100 x 200 x 70mm  
3 7/8 x 7 7/8 x 2 3/4"  
432 Units/Bundle  
.22 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

## APPEARANCE

Edge Detail - Zero

Surface Texture - Timeworn

Joint Spacing - 4 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	STANDARD SMOOTH
Bundle Type	SINGLE
Plant Produced	AURORA
Thickness (mm)	60 mm

SQFT PER	Bundle	111.60
	Layer	11.16
	Section	-
	Stone	0.16

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.27
	Section	-
	Layer	14.17
	Bundle	141.73


SAILOR LNFT PER	SqFt	5.08
	Section	-
	Layer	56.69
	Bundle	566.93

UNITS PER	SqFt	6.45
	Section	-
	Bundle	720.00


LBS PER	Layer	306
	Section	-
	Bundle	3,063

Colors	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Sable Blend	SR n/a SRI n/a	✓


LAYER CONFIGURATION




LAYING PATTERNS



Mattoni DHB



Mattoni HB



Mattoni RB

SINGLE UNIT



### STANDARD


60 x 240 x 60mm  
2 3/8 x 9 1/2 x 2 3/8"  
720 Units/Bundle  
.16 Sq.Ft./Stone




COCOA BROWN



DARK CHARCOAL



GRANITE FUSION



SABLE BLEND

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



### APPLICATIONS

Pedestrian, Roof Deck

### APPEARANCE

Edge Detail - Sawn

Surface Texture - Brushed / Riven

Joint Spacing - 10 mm

### TECHNICAL INFORMATION

Visit [Unilock.com](https://unilock.com) for more information.

SANDSTONE	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm	22 mm

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072

Colors	Reflectance	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	SO	SO	SO	SO
Greyfield	SR .32 SRI 35	SO	SO	SO	SO
Stone Cliff Grey	SR .27 SRI 28	SO	SO	SO	SO


LIMESTONE	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm	22 mm

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,033	2,136	1,836	2,072


Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR .08 SRI 4	✓	✓	✓	✓
Hearthstone	SR .20 SRI 20	✓	✓	✓	✓

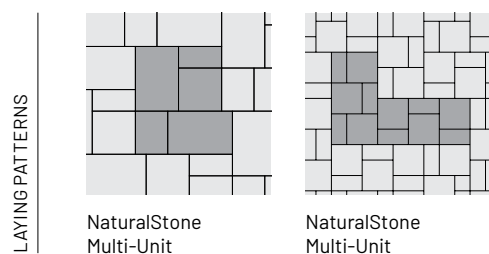

LAYING PATTERNS

NaturalStone  
Multi-Unit

NaturalStone  
Multi-Unit

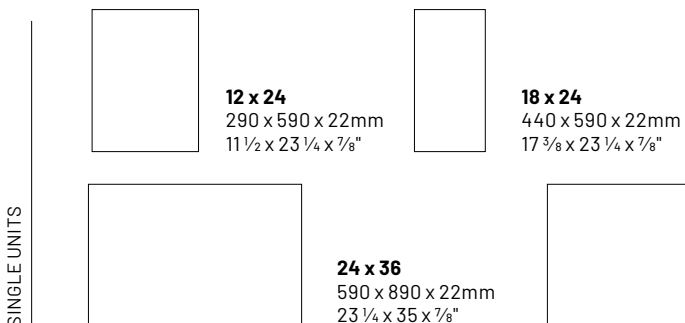

SINGLE UNITS

**12 x 24**  
290 x 590 x 22mm  
11 1/2 x 23 1/4 x 7/8"

**18 x 24**  
440 x 590 x 22mm  
17 3/8 x 23 1/4 x 7/8"

**24 x 36**  
590 x 890 x 22mm  
23 1/4 x 35 x 7/8"

**24 x 24**  
590 x 590 x 22mm  
23 1/4 x 23 1/4 x 7/8"



CASCADE



GREYFIELD



STONE CLIFF GREY



BLACK RIVER



HEARTHSTONE

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required. SOLD IN FULL CRATES ONLY** and all units except the 24x24" require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



### APPLICATIONS

Pedestrian

### APPEARANCE

Edge Detail - Sawn

Surface Texture - Natural Finish

Joint Spacing - 10 mm


### TECHNICAL INFORMATION

Visit [Unilock.com](https://unilock.com) for more information.

SANDSTONE		4 PC BUNDLE
Bundle Type		RANDOM
Thickness (mm)		38 mm
SQFT PER	Crate	120.00
	Units	-
UNITS PER	Crate	32.00
	SqFt	-
LBS PER	Unit	73
	Bundle	2,515
Colors	Reflectance	Stock
Stone Cliff Grey	SR .27 SRI 28	SO


LIMESTONE		4 PC BUNDLE
Bundle Type		RANDOM
Thickness (mm)		38 mm
SQFT PER	Crate	120.00
	Units	-
UNITS PER	Crate	32
	SqFt	-
LBS PER	Unit	73
	Bundle	2,315
Colors	Reflectance	Stock
Hearthstone	SR n/a SRI n/a	SO

LAYING PATTERNS



NaturalStone Fixed RB

4 UNIT RANDOM



**24 x 24**  
590 x 590 x 38mm  
23 1/4 x 23 1/4 x 1 1/2"


**18 x 24**  
440 x 590 x 38mm  
17 3/8 x 23 1/4 x 1 1/2"

**24 x 36**  
590 x 890 x 38mm  
23 1/4 x 35 x 1 1/2"

**12 x 24**  
290 x 590 x 38mm  
11 1/2 x 23 1/4 x 1 1/2"



STONE CLIFF GREY



HEARTHSTONE



### APPLICATIONS

Wall Coping, Pool Coping, Steps Treads



CASCADE



GREYFIELD



STONE CLIFF GREY



BLACK RIVER

SANDSTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	16.00
	SqFt	4.00	4.00	4.00	4.67	4.67	4.67

LBS PER	Unit	101	97	106	117	117	113
	Crate	2,028	1,927	2,116	2,560	2,247	2,258


Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	SO	SO	SO	SO	SO	SO
Greyfield	SR n/a SRI n/a	SO	SO	SO	SO	SO	SO
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓

LIMESTONE		48 x 12 FULLNOSE COPING	48 x 12 STRAIGHT EDGE COPING	48 x 12 ROCKFACE COPING	48 x 14 FULLNOSE COPING	48 x 14 STRAIGHT COPING	48 x 14 ROCKFACE COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00	20.00
	SqFt	4.00	4.00	4.00	4.67	4.67	4.67

LBS PER	Unit	112	112	112	130	130	130
	Crate	2,222	2,222	2,222	2,593	2,593	2,593

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓	✓	✓

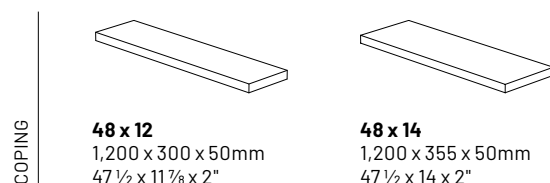

EDGE DETAIL



STRAIGHT EDGE



FULLNOSE



ROCKFACE

Notes: Special Order (SO). Minimum quantities apply. Lead time required. Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



### APPLICATIONS

Wall Coping, Pool Coping, Steps Treads



CASCADE



GREYFIELD



STONE CLIFF GREY



BLACK RIVER

SANDSTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
	SqFt	4.67	4.67	3.0	3.0	4.67

LBS PER	Unit	113	113	91	91	106
	Crate	2,249	2,249	1,808	1,808	2,120

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	SO	SO	SO	SO	SO
Greyfield	SR n/a SRI n/a	SO	SO	SO	SO	SO
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	-	-	-

LIMESTONE		28 x 14 FULLNOSE CORNER / COPING	28 x 14 STRAIGHT CORNER / COPING	24 x 12 FULLNOSE CORNER / COPING	24 x 12 STRAIGHT CORNER / COPING	24 x 24 INSERT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 mm	50 mm	50 mm	50 mm	50 mm


UNITS PER	Crate	20.00	20.00	20.00	20.00	20.00
	SqFt	4.08	4.08	3.0	3.0	4.0

LBS PER	Unit	117	117	84	84	90
	Crate	2,237	2,237	1,676	1,676	1,800

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	-	-	-

INSERT COPING


Insert coping is ideal for those retractable pool covers. Allowing easy access while keeping a continuous look and feel.




**24 x 24**  
600 x 600 x 50mm  
24 x 24 x 2"

CORNER COPING

Corner coping provides seamless 90° corners for pool, walls and so much more.



**28 x 14**  
710 x 355 x 50mm  
28 x 14 x 2"



**24 x 12**  
600 x 300 x 50mm  
23 5/8 x 11 7/8 x 2"

EDGE DETAIL



STRAIGHT EDGE



FULLNOSE

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



### APPLICATIONS

Steps, Pillar

### TECHNICAL INFORMATION

Visit [Unilock.com](https://unilock.com) for more information.



CASCADE



GREYFIELD



STONE CLIFF GREY



BLACK RIVER

SANDSTONE	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
Bundle Type	SINGLE	SINGLE	SINGLE
Thickness (mm)	65 mm	65 mm	150 mm

LNFT PER	Crate	28.00	28.00	24.00
	Unit	2.33	2.33	4.00

UNITS PER	Crate	14.00	12.00	6.00
-----------	-------	-------	-------	------

LBS PER	Unit	143	199	421
	Crate	1,991	2,385	2,526

Colors	Reflectance	Stock	Stock	Stock
Cascade	SR n/a SRI n/a	S0	S0	S0
Greyfield	SR n/a SRI n/a	S0	S0	S0
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓

LIMESTONE	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP	48 x 16 STEP
Bundle Type	SINGLE	SINGLE	SINGLE
Thickness (mm)	65 mm	65 mm	150 mm

LNFT PER	Crate	28.00	28.00	24.00
	Unit	2.33	2.33	4.00

UNITS PER	Crate	14.00	12.00	6.00
-----------	-------	-------	-------	------


LBS PER	Unit	143	207	421
	Crate	1,995	2,480	2,526

Colors	Reflectance	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓

PILLAR CAPS




**24 x 24**  
600 x 600 x 64mm  
23 5/8 x 23 5/8 x 2 5/8"



**28 x 28**  
710 x 710 x 64mm  
28 x 28 x 2 5/8"

STEPS



**48 x 16**  
1,200 x 400 x 150mm  
47 1/4 x 15 3/4 x 5 7/8"

EDGE DETAIL



STRAIGHT EDGE



ROCKFACE

Notes: Special Order (S0). Minimum quantities apply. Lead time required. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



### APPLICATIONS

Pedestrian, Roof Deck

### APPEARANCE

Edge Detail - Zero

Surface Texture - Brushed / Riven

Joint Spacing - 10 mm

### TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.

SANDSTONE	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm	22 mm

SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17

LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149

Colors	Reflectance	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	✓	✓	✓	✓
Ivory Sand	SR n/a SRI n/a	✓	✓	✓	✓
Stone Cliff Gray	SR n/a SRI n/a	✓	✓	✓	✓

LIMESTONE	12 x 24	18 x 24	24 x 24	24 x 36
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	22 mm	22 mm	22 mm	22 mm


SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00

UNITS PER	Crate	90.00	62.00	40.00	30.00
	SqFt	0.50	0.33	0.25	0.17


LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149

Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓

LAYING PATTERNS



NaturalStone  
Multi-Unit



NaturalStone  
Multi-Unit

SINGLE UNITS



**12 x 24**  
300 x 600 x 22mm  
11 7/8 x 23 5/8 x 7/8"  
2.0 Sq.Ft./Unit




**18 x 24**  
450 x 600 x 22mm  
17 3/4 x 23 5/8 x 7/8"  
3.0 Sq.Ft./Unit



**24 x 36**  
600 x 900 x 22mm  
23 5/8 x 35 1/2 x 7/8"  
6.0 Sq.Ft./Unit



**24 x 24**  
600 x 600 x 22mm  
23 5/8 x 23 5/8 x 7/8"  
4.0 Sq.Ft./Unit



GOLDEN SAND



IVORY SAND



STONE CLIFF GRAY



BLACK RIVER

**Notes: SOLD IN FULL CRATES ONLY.** Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurements are nominal. **Product is not intended for vehicular applications.**



APPLICATIONS  
Wall Coping, Pool Coping, Steps Treads

SANDSTONE	48 x 14 FULLNOSE COPING	48 x 12 FULLNOSE COPING	48 x 12 ROCKFACE COPING	48 x 14 ROCKFACE COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00
	SqFt	-	-	-	-

LBS PER	Unit	-	-	-	-
	Crate	2,557	2,116	2,116	2,557

Colors	Reflectance	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	✓	✓	✓	✓
Ivory Sand	SR n/a SRI n/a	✓	✓	✓	✓
Stone Cliff Gray	SR n/a SRI n/a	✓	✓	✓	✓
Black River	SR n/a SRI n/a	✓	✓	✓	✓

LIMESTONE	48 x 14 FULLNOSE COPING	48 x 12 FULLNOSE COPING	48 x 12 NATURAL EDGE COPING	48 x 14 NATURAL EDGE COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)	50 mm	50 mm	50 mm	50 mm

UNITS PER	Crate	20.00	20.00	20.00	20.00
	SqFt	-	-	-	-

LBS PER	Unit	-	-	-	-
	Crate	2,557	2,116	2,116	2,557

Colors	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓	✓	✓



GOLDEN SAND



IVORY SAND




STONE CLIFF GREY




BLACK RIVER

COPING



48 x 12  
1,200 x 300 x 50mm  
47 1/4 x 11 7/8 x 2"



48 x 14  
1,200 x 356 x 50mm  
47 1/4 x 13 7/8 x 2"

EDGE DETAIL



FULLNOSE



ROCKFACE

Notes: Steps, Coping & Pillar Caps require a refundable skid. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



### APPLICATIONS

Steps, Pillar

### TECHNICAL INFORMATION

Visit [Unilock.com](https://unilock.com) for more information.

SANDSTONE LIMESTONE	48 x 16 STEP
Bundle Type	SINGLE
Thickness (mm)	150 mm

FCFT PER	Crate	32.00
----------	-------	-------

LNFT PER	Crate	24.00
----------	-------	-------

UNITS PER	Crate	6.00
-----------	-------	------

LBS PER	Bundle	2,526
---------	--------	-------

Colors	Reflectance	Stock
Black River	SR n/a SRI n/a	✓

SANDSTONE	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
Bundle Type	SINGLE	SINGLE
Thickness (mm)	65 mm	65 mm

UNITS PER	Crate	14.00	12.00
	SqFt	-	-

LBS PER	Unit	137	210
	Bundle	1,914	2,514

Colors	Reflectance	Stock	Stock
Golden Sand	SR n/a SRI n/a	✓	-
Ivory Sand	SR n/a SRI n/a	✓	-
Stone Cliff Grey	SR n/a SRI n/a	✓	✓

LIMESTONE	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
Bundle Type	SINGLE	SINGLE
Thickness (mm)	65 mm	65 mm

UNITS PER	Crate	14.00	12.00
	SqFt	-	-

LBS PER	Unit	137	210
	Bundle	1,914	2,514

Colors	Reflectance	Stock	Stock
Black River	SR n/a SRI n/a	✓	✓



GOLDEN SAND




IVORY SAND




STONE CLIFF GREY




BLACK RIVER



PILLAR CAPS



**24 x 24**  
600 x 600 x 65mm  
23 5/8 x 23 5/8 x 2 5/8"



**28 x 28**  
711 x 711 x 65mm  
28 x 28 x 2 5/8"

**Notes:** This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,  
Heavy-duty, Permeable

## APPEARANCE

Edge Detail - Zero  
Surface Texture - Cobble


## TECHNICAL INFORMATION

Conforms to ASTM C 936  
Eligible for LEED v4.1 credits


		STANDARD
Bundle Type		SINGLE
Plant Produced		CHICAGO
Thickness (mm)		60 mm
SQFT PER	Bundle	98.25
	Layer	9.82
	Section	-
	Stone	0.09
PER BUNDLE	Layers	10.00
	Sections	-
SOLDIER LNFT PER	SqFt	3.39
	Section	-
	Layer	33.30
	Bundle	333.07
SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-
UNITS PER	SqFt	10.99
	Section	-
	Bundle	1,080
LBS PER	Layer	230.10
	Section	-
	Bundle	2,301

Colors	Reflectance	Stock
Granite Fusion	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Opal Blend	SR n/a SRI n/a	✓


LAYER CONFIGURATION




LAYING PATTERNS



NordicCobble\_Fan



NordicCobble\_Circle



NordicCobble\_A

SINGLE UNITS



### STANDARD

89.9 x 94 x 60mm  
3 5/8 x 3 3/4 x 2 3/8"  
1,080 Units/Bundle  
.09 Sq.Ft./Stone



GRANITE FUSION



DARK CHARCOAL



OPAL BLEND



## APPLICATIONS

Pedestrian, Roof Deck

## TECHNICAL INFORMATION


Visit [Unilock.com](http://Unilock.com) for more information.



		24 x 24 PRESSED EDGE
Bundle Type		SINGLE
Thickness (mm)		20 mm
SQFT PER	Pallet	248.00
	Box	7.75
	Unit	3.88
PER PALLET	Box	32.00
	SqFt	248.00
	Unit	64.00
UNITS PER	Pallet	64.00
	Box	2.00
LBS PER	Unit	36
	SqFt	9
	Box	72
	Pallet	2,289


Colors	Reflectance	Stock
Chamonix Beige	n/a	SO
Chamonix Bianco	n/a	SO
Chamonix Dark Gray	n/a	SO
Chamonix Gray	n/a	SO
Gotham Bianco	n/a	SO
Gotham Gray	n/a	SO
Gotham Nero	n/a	SO
Travstone Beige	n/a	SO
Travstone Gray	n/a	SO
West 57th Bianco	n/a	SO
West 57th Gray	n/a	SO
Essential White	n/a	SO
Essential Gray	n/a	SO
Essential Graphite	n/a	SO
Essential Beige	n/a	SO
Nature Dolomite	n/a	SO
Nature Carrara	n/a	SO
New England White	n/a	SO
New England Ivory	n/a	SO
New England Cold Gray	n/a	SO

LAYING PATTERNS




Porcelain 24x24 RB

SINGLE UNIT



**24 x 24**  
600 x 600 x 20mm  
23 5/8 x 23 5/8 x 3/4"  
3.88 Sq.Ft./Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required. SOLD IN FULL PALLETS ONLY.** Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**

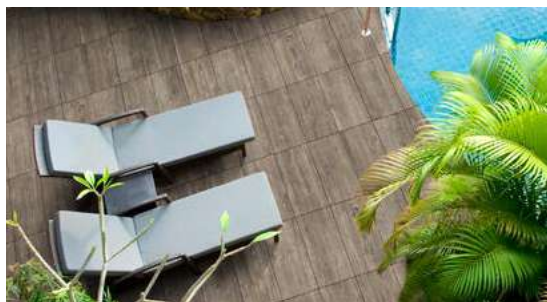

## APPLICATIONS

Pedestrian, Roof Deck

## TECHNICAL INFORMATION

Visit [Unilock.com](http://Unilock.com) for more information.

	16 x 32 PRESSED EDGE
Bundle Type	SINGLE
Thickness (mm)	20 mm

SQFT PER	Pallet	165.36
	Box	6.89
	Unit	3.45


PER PALLET	Box	24.00
	SqFt	165.36
	Unit	48.00

UNITS PER	Pallet	48.00
	Box	2.00


LBS PER	Unit	32
	SqFt	9
	Box	64
	Pallet	1,538

Colors	Reflectance	Stock
Arbor Bianco	n/a	SO
Travestone Beige	n/a	SO
Travestone Gray	n/a	SO
New England White	n/a	SO
New England Ivory	n/a	SO
New England Cold Gray	n/a	SO
Quartzite Bianco	n/a	SO
Quartzite Dark Gray	n/a	SO
Quartzite Gray	n/a	SO
Quartzite Sand	n/a	SO

LAYING PATTERNS




Porcelain 16x32 RB



Porcelain 16x32 HB

SINGLE UNITS



**16 x 32**  
400 x 800 x 20mm  
15 3/4 x 31 1/2 x 3/4"  
3.45 Sq.Ft./Stone



ARBOR  
BIANCO



TRAVESTONE  
BEIGE



TRAVESTONE  
GRAY



NEW ENGLAND  
WHITE



NEW ENGLAND  
IVORY



NEW ENGLAND  
COLD GRAY



QUARTZITE  
BIANCO



QUARTZITE  
DARK GRAY



QUARTZITE  
GRAY



QUARTZITE  
SAND

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required. SOLD IN FULL PALLETS ONLY.** Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth, Series™ Exposed

& Il Campo® Brushed

Joint Spacing - 4 mm


## TECHNICAL INFORMATION

Conforms to ASTM C 936


Eligible for LEED v4.1 credits

		SMOOTH	IL CAMPO	SERIES
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	PICKERING	PICKERING	GEORGETOWN
	Thickness (mm)	100 mm	100 mm	100 mm
SQFT PER	Bundle	58.13	58.13	58.13
	Layer	11.63	11.63	11.63
	Section	-	-	-
	Stone	0.32	0.32	0.32
PER BUNDLE	Layers	5.00	5.00	5.00
	Sections	-	-	-
SOLDIER LNFT PER	SqFt	1.02	1.02	1.02
	Section	-	-	-
	Layer	11.81	11.81	11.81
	Bundle	59.06	59.06	59.06
SAILOR LNFT PER	SqFt	3.05	3.05	3.05
	Section	-	-	-
	Layer	35.43	35.43	35.43
	Bundle	177.17	177.17	177.17
UNITS PER	SqFt	3.10	3.10	3.10
	Section	-	-	-
	Bundle	180.00	180.00	180.00
LBS PER	Layer	532	526	532
	Section	-	-	-
	Bundle	2,659	2,629	2,659

Colors	Reflectance	Stock	Stock	Stock
Black Granite	SR n/a SRI n/a	-		SO
Dark Charcoal	SR n/a SRI n/a	-	SO	-
Granite Fusion	SR n/a SRI n/a	-	SO	-
Light Gray	SR n/a SRI n/a	-	SO	-
Opal Blend	SR .24 SRI 24	SO	-	-
Sandy Beige	SR n/a SRI n/a	SO	-	-
Steel Gray Blend	SR n/a SRI n/a	SO	-	-



BLACK GRANITE



DARK CHARCOAL



GRANITE FUSION



LIGHT GREY



OPAL BLEND



SANDY BEIGE



STEEL GREY BLEND

SINGLE UNITS



**4 x 12**  
**SMOOTH**  
100 x 300 x 100mm  
3 7/8 x 11 7/8 x 3 7/8"  
180 Units/Bundle  
.32 Sq.Ft./Stone

**4 x 12**  
**SERIES**  
100 x 300 x 100mm  
3 7/8 x 11 7/8 x 3 7/8"  
180 Units/Bundle  
.32 Sq.Ft./Stone

**4 x 12**  
**IL CAMPO BRUSHED**  
100 x 300 x 100mm  
3 7/8 x 11 7/8 x 3 7/8"  
180 Units/Bundle  
.32 Sq.Ft./Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**  
All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 4 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	SMOOTH	IL CAMPO
Bundle Type	SINGLE	SINGLE
Plant Produced	PICKERING / MI	PICKERING
Thickness (mm)	100 mm	100 mm

SQFT PER	Bundle	51.67	51.67
	Layer	10.33	10.33
	Section	-	-
	Stone	0.43	0.43

PER BUNDLE	Layers	5.00	5.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.76	0.76
	Section	-	-
	Layer	7.87	7.87
	Bundle	39.37	39.37


SAILOR LNFT PER	SqFt	3.05	3.05
	Section	-	-
	Layer	31.50	31.50
	Bundle	157.48	157.48

UNITS PER	SqFt	2.32	2.32
	Section	-	-
	Bundle	120.00	120.00


LBS PER	Layer	488	488
	Section	-	-
	Bundle	2,440	2,440

Colors	Reflectance	Stock	Stock
Opal Blend	SR .24 SRI 24	SO	-
Steel Gray Blend	SR n/a SRI n/a	SO	-
Dark Charcoal	SR n/a SRI n/a	-	SO
Granite Fusion	SR n/a SRI n/a	-	SO
Light Gray	SR n/a SRI n/a	-	SO

LAYING PATTERNS



Promenade 4x16 HB



Promenade 4x16 RB

SINGLE UNIT



**4 x 16**  
**SMOOTH**  
 100 x 400 x 100mm  
 3 7/8 x 15 3/4 x 3 7/8"  
 120 Units/Bundle  
 .43 Sq.Ft./Stone



OPAL BLEND



STEEL GREY BLEND



DARK CHARCOAL



GRANITE FUSION



LIGHT GREY

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**  
 All measurements are nominal. Contact Unilock for more information. **SPECIAL ORDER PRODUCT - NON-STOCK**



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth, Series™ Exposed

& Il Campo® Brushed

Joint Spacing - 4 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	SMOOTH	IL CAMPO	SERIES
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	PICKERING	PICKERING	GEORGETOWN
Thickness (mm)	100 mm	100 mm	100 mm

SQFT PER	Bundle	51.67	51.67	51.67
	Layer	10.33	10.33	10.33
	Section	-	-	-
	Stone	1.29	1.29	1.29

PER BUNDLE	Layers	5.00	5.00	5.00
	Sections	-	-	-


SOLDIER LNFT PER	SqFt	0.51	0.51	0.51
	Section	-	-	-
	Layer	5.25	5.25	5.25
	Bundle	26.25	26.25	26.25





SAILOR LNFT PER	SqFt	1.52	1.52	1.52
	Section	-	-	-
	Layer	15.75	15.75	15.75
	Bundle	78.74	78.74	78.74

UNITS PER	SqFt	0.77	0.77	0.77
	Section	-	-	-
	Bundle	40.00	40.00	40.00

LBS PER	Layer	478	478	478
	Section	-	-	-
	Bundle	2,391	2,391	2,391

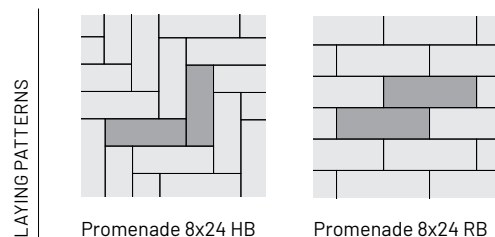Colors	Reflectance	Stock	Stock	Stock
Black Granite	SR n/a SRI n/a	-	-	SO
Dark Charcoal	SR n/a SRI n/a	-	SO	-
Granite Blend	SR n/a SRI n/a	-	SO	-
Light Gray	SR n/a SRI n/a	-	SO	-
Opal Blend	SR .24 SRI 24	SO	-	-
Steel Gray Blend	SR n/a SRI n/a	SO	-	-



LAYING PATTERNS		
	Promenade 8x24 HB	Promenade 8x24 RB
SINGLE UNITS		
	<b>8 x 24 SMOOTH</b> 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 Units/Bundle 1.29 Sq.Ft./Stone	<b>8 x 24 SERIES EXPOSED</b> 200 x 600 x 100mm 7 7/8 x 23 5/8 x 3 7/8" 40 Units/Bundle 1.29 Sq.Ft./Stone



**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**  
 All measurements are nominal. Contact Unilock for more information. **SPECIAL ORDER PRODUCT - NON-STOCK**



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - n/a


Surface Texture - Textured

Joint Spacing - 10 mm


## TECHNICAL INFORMATION

Conforms to ASTM C 936


Eligible for LEED v4.1 credits




LAYER CONFIGURATION



Richcliff  
Fixed Random A




Richcliff  
Fixed Random B



Richcliff  
Large Rec.HB

LAYING PATTERNS



3 UNIT RANDOM BUNDLE

### RECTANGLE

226 x 300 x 60mm  
8 7/8 x 11 7/8 x 2 3/8"  
64 Units/Bundle  
.75 SqFt./Stone

### SQUARE

226 x 226 x 60mm  
8 7/8 x 8 7/8 x 2 3/8"  
32 Units/Bundle  
.58 Sq.Ft./Stone

### SMALL RECTANGLE

150 x 226 x 60mm  
5 7/8 x 8 7/8 x 2 3/8"  
64 Units/Bundle  
.38 Sq.Ft./Stone

SINGLE UNIT



### LARGE RECTANGLE

302 x 528 x 60mm  
11 7/8 x 20 7/8 x 2 3/8"  
48 Units/Bundle  
1.72 Sq.Ft./Stone  
(Not drive friendly)

		LARGE RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	AYR	AYR
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	90.30	82.39
	Layer	11.29	10.30
	Section	-	-
	Stone	0.56	1.72

PER BUNDLE	Layers	8.00	8.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

UNITS PER	SqFt	1.77	0.58
	Section	-	-
	Bundle	160.00	48.00

LBS PER	Layer	309	301
	Section	-	-
	Bundle	2,472	2,411

Colors	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	✓	SO
Pebble Taupe	SR n/a SRI n/a	✓	SO
Smoke Shale	SR n/a SRI n/a	✓	SO



DAWN MIST



PEBBLE TAUPE



PEBBLE TAUPE  
DAWN MIST  
Blended on Site



SMOKE SHALE

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. The Large Rectangle unit is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

## APPEARANCE

Edge Detail - Chamfer

Surface Texture - Series Exposed

Joint Spacing - 3mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	4 x 8	4 x 12 PERMEABLE
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	60 mm	80 mm

SQFT PER	Bundle	117.90	93.04
	Layer	11.80	11.63
	Section	19.67	-
	Stone	0.22	0.32



PER BUNDLE	Layers	10.00	8.00
	Sections	6.00	-

SOLDIER LNFT PER	SqFt	1.50	1.02
	Section	29.53	-
	Layer	17.72	11.81
	Bundle	177.17	94.49

SAILOR LNFT PER	SqFt	3.00	3.05
	Section	59.06	-
	Layer	35.43	35.43
	Bundle	354.33	283.46


UNITS PER	SqFt	4.58	3.10
	Section	90.00	-
	Bundle	540.00	288.00

LBS PER	Layer	306	426
	Section	511	-
	Bundle	3,065	3,404


Colors	Reflectance	Stock	Stock
Onyx Black	SR n/a SRI n/a	✓	-
Arctic Gray 	SR n/a SRI n/a	-	SO
Nordic Star 	SR n/a SRI n/a	-	SO



ONYX BLACK




ARCTIC GRAY




NORDIC STAR

LAYING PATTERNS



Series 4x8 HB




Series 4x8 RB

SINGLE UNITS



**4 x 8**  
100 x 200 x 60mm  
3 7/8 x 7 7/8 x 2 3/8"  
540 Units/Bundle  
.22 Sq.Ft./Stone



**4 x 12 PERMEABLE**   
100 x 300 x 80mm  
3 7/8 x 11 7/8 x 3 1/8"  
288 Units/Bundle  
.32 Sq.Ft./Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Roof Deck

## APPEARANCE

Edge Detail - Micro

Surface Texture - Smooth

Joint Spacing - 2 mm

## TECHNICAL INFORMATION


Conforms to ASTM C 1782

Eligible for LEED v4.1 credits


**// Perfect for roof decks and other raised floor applications.**

Ask us about our Skyview™ pedestal system.  
See page 95 for more information.


LAYER CONFIGURATION

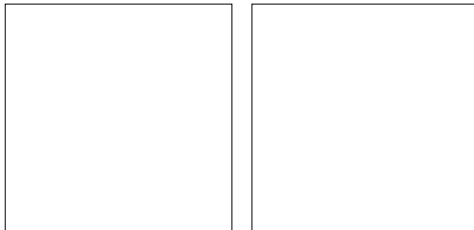

LAYING PATTERNS




Skyline 24x24 SB



Skyline 24x24 RB

SINGLE UNITS



**24 x 24**  
606 x 606 x 50mm  
23 5/8 x 23 5/8 x 2"  
20 Units/Bundle  
3.88 Sq.Ft./Stone

	24 x 24
Bundle Type	SINGLE
Plant Produced	HARRISON
Thickness (mm)	50 mm

SQFT PER	Bundle	80.00
	Layer	8.00
	Sections	-
	Stone	3.88

PER BUNDLE	Layers	10.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Sections	-
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.25
	Layer	-
	Bundle	20.00

LBS PER	Layer	183
	Sections	-
	Bundle	1,756

Colors	Reflectance	Stock
Chamois	SR .41 SRI 46	✓
Silver Grey	SR n/a SRI n/a	✓



CHAMOIS



SILVER GREY

**Notes:** Product is not intended vehicular applications. Minimum quantities apply. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.



## APPLICATIONS

Pedestrian, Roof Deck

## APPEARANCE

Edge Detail - Micro

Surface Texture - Thermal/Flamed and Shot Blast

Joint Spacing - 0 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 1782

Eligible for LEED v4.1 credits

**// Perfect for roof decks and other raised floor applications.**


Ask us about our Skyview™ pedestal system.  
See page 95 for more information.

SLAB SPACERS



X & T Slab Spacers  
Bagged Separately

LAYING PATTERNS



Soreno 16x32 RB

SINGLE UNITS



**16 x 32**  
407 x 815 x 50mm  
16 x 32 x 2"  
18 Units/Bundle  
3.57 Sq.Ft./Stone

	16 x 32	SHOT BLAST
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	50 mm	50 mm

SQFT PER	Bundle	64.27	64.27
	Layer	3.57	3.57
	Section	-	-
	Stone	3.57	3.57

PER BUNDLE	Layers	18.00	18.00
	Sections	-	-


SOLDIER LNFT PER	SqFt	0.37	0.38
	Section	-	-
	Layer	1.34	1.34
	Bundle	24.04	24.12

SAILOR LNFT PER	SqFt	0.75	0.75
	Section	-	-
	Layer	2.67	2.67
	Bundle	48.13	48.06


UNITS PER	SqFt	0.28	0.28
	Section	-	-
	Bundle	18.00	18.00

LBS PER	Layer	86	86
	Section	-	-
	Bundle	1,549	1,549

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	<b>SO</b>
Light Granite	SR n/a SRI 50	<b>SO</b>	-
Toscana Beige	SR n/a SRI 77	<b>SO</b>	-



DARK CHARCOAL



LIGHT GRANITE



TOSCANA BEIGE

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications. Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Permeable

## APPEARANCE

Edge Detail - Zero

Surface Texture - Textured

Joint Spacing - 11-18 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	70 mm

SQFT PER	Bundle	88.61
	Layer	11.08
	Section	-
	Stone	0.92

PER BUNDLE	Layers	8.00
	Sections	-



SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	1.08
	Section	-
	Bundle	96.00

LBS PER	Layer	355
	Section	-
	Bundle	2,837

Colors	Reflectance	Stock
Birch	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓

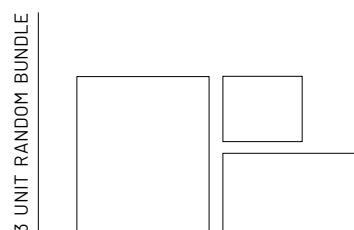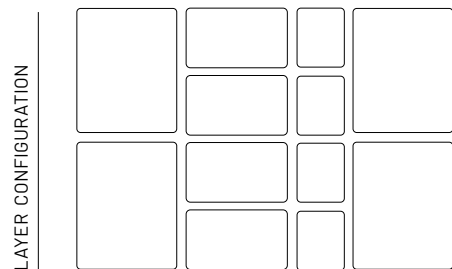


**LARGE RECTANGLE**  
350 x 420 x 70mm  
13 7/8 x 16 5/8 x 2 3/4"  
32 Units/Bundle

**MEDIUM RECTANGLE**  
210 x 350 x 70mm  
8 3/8 x 13 7/8 x 2 3/4"  
32 Units/Bundle

**SMALL RECTANGLE**  
173 x 210 x 70mm  
6 7/8 x 8 3/8 x 2 3/4"  
32 Units/Bundle



BIRCH



SIERRA

Notes: SOLD IN FULL BUNDLES ONLY and is produced on an optional, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Roadway Street,  
Border/Accents, Permeable

## APPEARANCE

Edge Detail - n/a  
Surface Texture - Textured  
Joint Spacing - 10 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
Eligible for LEED v4.1 credits

	4 x 10
Bundle Type	SINGLE
Plant Produced	AYR
Thickness (mm)	70 mm

SQFT PER	Bundle	88.41
	Layer	11.05
	Section	-
	Stone	.28

PER BUNDLE	Layers	8.00
	Sections	-


SOLDIER LNFT PER	SqFt	1.19
	Section	-
	Layer	13.12
	Bundle	104.99

SAILOR LNFT PER	SqFt	2.97
	Section	-
	Layer	32.81
	Bundle	262.47

UNITS PER	SqFt	3.62
	Section	-
	Bundle	320.00

LBS PER	Layer	361
	Section	-
	Bundle	2,888

Colors	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	✓
Old Oak	SR n/a SRI n/a	✓

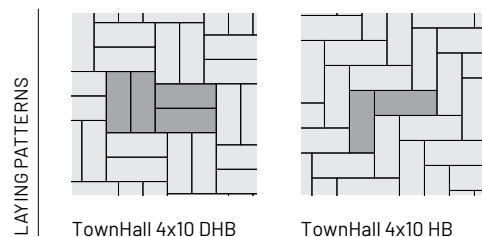

SINGLE UNIT	
	<b>4 x 10</b>
	100 x 250 x 70mm
	3 7/8 x 9 7/8 x 2 3/4"
	320 Units/Bundle .28 Sq.Ft./Stone



**APPLICATIONS**

Pedestrian, Light Vehicular, Permeable

**APPEARANCE**

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 7 mm

**TECHNICAL INFORMATION**

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	SMOOTH
Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	60 mm

SQFT PER	Bundle	105.18
	Layer	11.69
	Section	-
	Stone	0.56

PER BUNDLE	Layers	9.00
	Sections	-




SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	1.57
	Section	-
	Layer	18.35
	Bundle	165.11

UNITS PER	SqFt	1.80
	Section	-
	Bundle	189.00

LBS PER	Layer	321
	Section	-
	Bundle	2,886

Colors	Reflectance	Stock
Fossil	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓
Tuscany	SR n/a SRI n/a	✓
Limestone	SR n/a SRI n/a	✓
Grindstone	SR n/a SRI n/a	✓

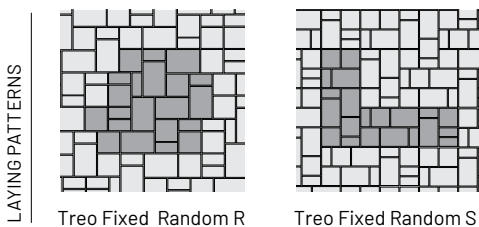**LARGE RECTANGLE**

225 x 337.5 x 60mm  
8 7/8 x 13 3/8 x 2 3/8"  
54 Units/Bundle  
.82 Sq.Ft./Stone

**SQUARE**

225 x 225 x 60mm  
8 7/8 x 8 7/8 x 2 3/8"  
63 Units/Bundle  
.55 Sq.Ft./Stone

**SMALL RECTANGLE**

112.5 x 225 x 60mm  
4 1/2 x 8 7/8 x 2 3/8"  
72 Units/Bundle  
.27 Sq.Ft./Stone



FOSSIL



GRANITE



TUSCANY



LIMESTONE



GRINDSTONE

**Notes:** SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Permeable

## APPEARANCE

Edge Detail - Micro

Surface Texture - Series Exposed Granite


Joint Spacing - 10 mm

## TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYER CONFIGURATION




LAYING PATTERNS



TribecaCobble Fixed  
Random

RANDOM BUNDLE



### LARGE RECTANGLE

130 x 305 x 70mm  
5 x 12 x 2 3/4"  
88 Units/Bundle  
.43 Sq.Ft./Stone

### RECTANGLE

130 x 230 x 70mm  
5 x 9 x 2 3/4"  
88 Units/Bundle  
.32 Sq.Ft./Stone

### SMALL RECTANGLE

130 x 175 x 70mm  
5 x 6 7/8 x 2 3/4"  
128 Units/Bundle  
.25 Sq.Ft./Stone

SERIES EXPOSED TEXTURED	
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 mm

SQFT PER	Bundle	97.53
	Layer	12.19
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.34
	Section	-
	Layer	28.49
	Bundle	227.95

UNITS PER	SqFt	3.12
	Section	-
	Bundle	304.00

LBS PER	Layer	378
	Section	-
	Bundle	3,021

Colors	Reflectance	Stock
Cobalt Gray	SR n/a SRI n/a	SO
Peppered Granite	SR .38 SRI 42	SO



COBALT GREY



PEPPERED GRANITE

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 99. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Permeable,  
Roadway Street


## APPEARANCE

Edge Detail - Zero  
Surface Texture - Standard  
Joint Spacing - 2 mm


## TECHNICAL INFORMATION

Conforms to ASTM C1319  
Eligible for LEED v4.1 credits

LAYER CONFIGURATION




LAYING PATTERNS



Turfstone A

SINGLE UNIT



**STANDARD**  
400 x 600 x 80mm  
15 3/4 x 23 5/8 x 3 1/8"  
32 Units/Bundle  
2.50 Sq.Ft./Stone

	SMOOTH
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	80 mm

SQFT PER	Bundle	80.00
	Layer	10.00
	Section	-
	Stone	2.50

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

UNITS PER	SqFt	0.40
	Section	-
	Bundle	32.00

LBS PER	Layer	247
	Section	-
	Bundle	1,975

Colors	Reflectance	Stock
Natural	SR .30 SRI 32	✓



NATURAL



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Umbriano Mottled



Joint Spacing - 4 mm

## TECHNICAL INFORMATION


Conforms to ASTM C 936

Eligible for LEED v4.1 credits


LAYER CONFIGURATION



LAYING PATTERNS



Umbriano 12x24 HB




Umbriano 24x24 RB

SINGLE UNITS



**12 x 24**  
300 x 600 x 50mm  
11 7/8 x 23 5/8 x 2"  
30 Units/Bundle  
1.94 Sq.Ft./Stone



**24 x 24**  
600 x 600 x 50mm  
23 5/8 x 23 5/8 x 2"  
10 Units/Bundle  
3.88 Sq.Ft./Stone

Bundle Type	12 x 24	24 x 24
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	50 mm	50 mm

SQFT PER	Bundle	58.13	38.75
	Layer	11.63	7.75
	Sections	-	-
	Stone	1.94	3.88

PER BUNDLE	Layers	5.00	5.00
	Sections	-	-


SOLDIER LNFT PER	SqFt	-	0.52
	Sections	-	-
	Layer	-	4.00
	Bundle	-	20.00

SAILOR LNFT PER	SqFt	-	0.52
	Sections	-	-
	Layer	-	4.00
	Bundle	-	20.00


UNITS PER	SqFt	0.52	0.26
	Sections	-	-
	Bundle	30.00	10.00

LBS PER	Layer	261	175
	Sections	-	-
	Bundle	1,303	874

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO



FRENCH GREY




GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not intended for vehicular use.** All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 3 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type		RANDOM	SMALL RECTANGLE
Plant Produced		GEORGETOWN	GEORGETOWN
Thickness (mm)		60 mm	60 mm

SQFT PER	Bundle	94.14	94.20
	Layer	10.46	10.46
	Section	-	-
	Stone	1.31	1.43

PER BUNDLE	Layers	9.00	9.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.85
	Section	-	-
	Layer	-	8.85
	Bundle	-	79.72


SAILOR LNFT PER	SqFt	0.85	1.69
	Section	-	-
	Layer	8.86	17.71
	Bundle	79.72	159.4

UNITS PER	SqFt	0.76	1.43
	Section	-	-
	Bundle	72.00	135.00


LBS PER	Layer	287	-
	Section	-	-
	Bundle	2,583	-

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	-
Grenada White	SR .45 SRI 52	✓	-
Midnight Sky	SR .17 SRI 15	✓	SO
Summer Wheat	SR .42 SRI 48	✓	-
Winter Marvel	SR .35 SRI 38	✓	-


LAYER CONFIGURATION




LAYING PATTERNS




Umbriano Fixed  
Random A



Umbriano Fixed  
Random B



FRENCH GREY




GRENADA WHITE



MIDNIGHT SKY




SUMMER WHEAT



WINTER MARVEL

RANDOM BUNDLE




**LARGE RECTANGLE**  
360 x 540 x 60mm  
14 x 21 x 2 3/8"  
18 Units/Bundle

**SQUARE**  
360 x 360 x 60mm  
14 1/4 x 14 1/4 x 2 3/8"  
27 Units/Bundle

**SMALL RECTANGLE**  
180 x 360 x 60mm  
7 x 14 1/4 x 2 3/8"  
27 Units/Bundle

SINGLE UNIT



**SMALL RECTANGLE**  
180 x 360 x 60mm  
7 x 14 1/4 x 2 3/8"  
30 Units/Bundle  
.70 Sq.Ft./Stone

**Notes:** Special Order (SO). Minimum quantities apply. Lead time required. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 4 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	21 x 36	18 x 36
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm

SQFT PER	Bundle	62.76	52.31
	Layer	10.46	8.72
	Sections	-	-
	Stone	5.23	4.36

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.34	0.68
	Sections	-	-
	Layer	3.54	5.91
	Bundle	21.26	35.44


SAILOR LNFT PER	SqFt	0.56	1.35
	Sections	-	-
	Layer	5.91	11.81
	Bundle	35.43	70.87

UNITS PER	SqFt	0.19	0.23
	Sections	-	-
	Bundle	12.00	12.00


LBS PER	Layer	287	239
	Sections	-	-
	Bundle	1,722	1,436

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	<b>SO</b>	-
Grenada White	SR .45 SRI 52	<b>SO</b>	-
Midnight Sky	SR .17 SRI 15	<b>SO</b>	<b>SO</b>
Summer Wheat	SR .42 SRI 48	<b>SO</b>	-
Winter Marvel	SR .35 SRI 38	<b>SO</b>	-

LAYING PATTERNS



Umbriano 21 x 36 RB



Umbriano 18 x 36 RB


SINGLE UNITS




**21 x 36**  
540 x 900 x 60mm  
21 1/4" x 35 1/2" x 2 3/8"  
12 Units/Bundle  
5.23 Sq.Ft./Stone



**18 x 36**  
450 x 900 x 60mm  
17 3/4" x 35 1/2" x 2 3/8"  
12 Units/Bundle  
4.36 Sq.Ft./Stone



FRENCH GREY




GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

**Notes:** Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not intended for vehicular use. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian

## APPEARANCE

Edge Detail - Zero

Surface Texture - Umbriano Mottled

Joint Spacing - 7mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	8 x 16	8 x 24	12 x 24	24 x 24
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	70 mm	70 mm	70 mm	70 mm

SQFT PER	Bundle	82.67	82.67	93.00	62.00
	Layer	10.33	10.33	11.63	7.75
	Sections	-	-	-	-
	Stone	0.86	1.29	1.94	3.88

PER BUNDLE	Layers	8.00	8.00	8.00	8.00
	Sections	-	-	-	-


SOLDIER LNFT PER	SqFt	0.76	0.51	0.51	0.51
	Sections	-	-	-	-
	Layer	7.87	5.25	5.91	3.94
	Bundle	62.99	41.99	47.24	31.50

SAILOR LNFT PER	SqFt	1.52	1.02	1.02	0.51
	Sections	-	-	-	-
	Layer	15.75	10.50	11.81	3.94
	Bundle	125.98	83.99	94.49	31.50

UNITS PER	SqFt	1.16	0.77	0.52	0.26
	Sections	-	-	-	-
	Bundle	96.00	64.00	48.00	16.00

LBS PER	Layer	343	331	393	258
	Sections	-	-	-	-
	Bundle	2,746	2,647	3,142	2,055

Colors	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	S0	S0	S0	S0
Grenada White	SR .45 SRI 52	S0	S0	S0	S0
Midnight Sky	SR .17 SRI 15	S0	S0	S0	S0
Summer Wheat	SR .42 SRI 48	S0	S0	S0	S0
Winter Marvel	SR .35 SRI 38	S0	S0	S0	S0

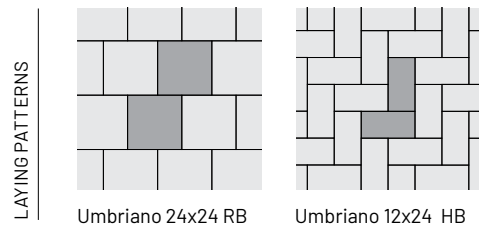

SINGLE UNITS		<b>24 x 24</b> 600 x 600 x 70mm 2 3/8 x 23 5/8 x 2 3/4" 16 Units/Bundle 3.88 Sq.Ft./Stone		<b>12 x 24</b> 300 x 600 x 70mm 11 7/8 x 23 5/8 x 2 3/4" 48 Units/Bundle 1.94 Sq.Ft./Stone		<b>8 x 24</b> 200 x 600 x 70mm 7 7/8 x 23 5/8 x 2 3/4" 64 Units/Bundle 1.29 Sq.Ft./Stone		<b>8 x 16</b> 200 x 400 x 70mm 7 7/8 x 15 3/4 x 2 3/4" 96 Units/Bundle .86 Sq.Ft./Stone
--------------	--	---	--	--	--	--	--	---

Notes: Special Order (S0). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular,

## APPEARANCE

Edge Detail - Zero




Surface Texture - Umbriano Mottled

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

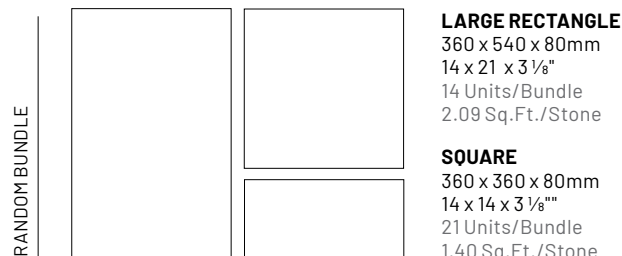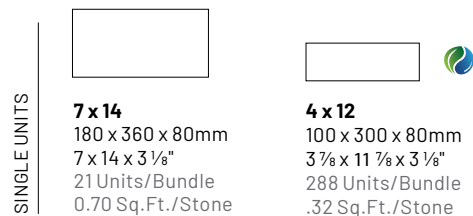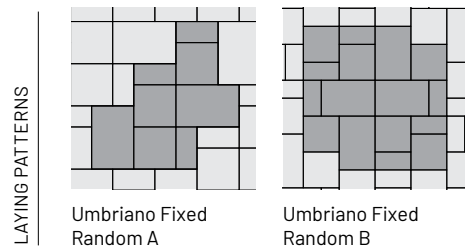

		7 x 14	4 x 12 PERMEABLE
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	GEORGETOWN	GEORGETOWN	MARENGO
Thickness (mm)	80 mm	80 mm	80 mm

SQFT PER	Bundle	73.22	73.24	93.04
	Layer	10.46	-	11.63
	Section	-	-	-
	Stone	1.31	-	0.32

PER BUNDLE	Layers	7.00	7.00	8.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	62.01	1.02
	Section	-	0.59	-
	Layer	-	-	11.81
	Bundle	-	-	94.49

SAILOR LNFT PER	SqFt	0.85	1.77	1.77
	Section	-	-	-
	Layer	8.86	-	-
	Bundle	62.01	62.01	62.01


UNITS PER	SqFt	0.76	-	3.10
	Section	-	-	-
	Bundle	56.00	105.00	288.00

LBS PER	Layer	383	383	426
	Section	-	-	-
	Bundle	2,680	2,680	3,404

Colors	Reflectance	Stock	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO	SO
Grenada White	SR .45 SRI 52	SO	SO	-
Midnight Sky	SR .17 SRI 15	SO	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO	-
Winter Marvel	SR .35 SRI 38	SO	SO	SO



FRENCH GREY    GRENADA WHITE    MIDNIGHT SKY



SUMMER WHEAT    WINTER MARVEL

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Umbriano Mottled

Joint Spacing - 7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

Bundle Type	18 x 36	36 x 36
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	100 mm	100 mm

SQFT PER	Bundle	43.59	43.59
	Layer	8.72	8.72
	Sections	-	-
	Stone	4.36	8.72

PER BUNDLE	Layers	5.00	5.00
	Sections	-	-

SOLDIER LNFT PER	SqFt	0.34	0.34
	Sections	-	-
	Layer	2.95	2.95
	Bundle	14.75	14.75


SAILOR LNFT PER	SqFt	0.68	0.34
	Sections	-	-
	Layer	5.90	2.95
	Bundle	29.50	14.75

UNITS PER	SqFt	0.23	0.11
	Sections	-	-
	Bundle	10.00	5.00


LBS PER	Layer	399	399
	Sections	-	-
	Bundle	1,994	1,994

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO

LAYING PATTERNS




Umbriano 36 x 36 RB



Umbriano 18 x 36 RB


SINGLE UNITS




**36 x 36**  
900 x 900 x 100mm  
35 1/2 x 35 1/2 x 3 7/8"  
5 Units/Bundle  
8.72 Sq.Ft./Stone



**18 x 36**  
450 x 900 x 100mm  
17 3/4 x 35 1/2 x 3 7/8"  
10 Units/Bundle  
4.36 Sq.Ft./Stone




FRENCH GREY




GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Roof Deck

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth


Joint Spacing - 4 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

LAYING PATTERNS




Urban Fixed Random E

SINGLE UNITS

SMALL RECTANGLES




**9 x 9**  
228 x 228 x 60mm  
9 x 9 x 2 3/8"



**8 x 15**  
190 x 380 x 60mm  
7 1/2 x 15 x 2 3/8"

RANDOM BUNDLE



**LARGE RECTANGLE**  
380 x 570 x 60mm  
15 x 22 1/2 x 2 3/8"  
14 Units/Bundle  
2.09 Sq.Ft./Stone

**SQUARE**  
380 x 380 x 60mm  
15 x 15 x 2 3/8"  
21 Units/Bundle  
1.40 Sq.Ft./Stone

**SMALL RECTANGLE**  
190 x 380 x 60mm  
7 1/2 x 15 x 2 3/8"  
21 Units/Bundle  
0.70 Sq.Ft./Stone

		9 x 9	8 x 16
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm	60 mm

SQFT PER	Bundle	104.91	98.90	116.57
	Layer	11.66	10.99	11.66
	Sections	-	-	-
	Stone	1.46	0.55	0.78

PER BUNDLE	Layers	9.00	9.00	10.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	-	-	0.78
	Sections	-	-	-
	Layer	-	-	9.35
	Bundle	-	-	93.50

SAILOR LNFT PER	SqFt	0.80	1.34	1.60
	Sections	-	-	-
	Layer	9.35	14.74	18.70
	Bundle	84.15	132.63	187.01

UNITS PER	SqFt	0.69	1.82	1.29
	Layer	-	-	-
	Bundle	72.00	180.00	150.00

LBS PER	Layer	320	299	332
	Section	-	-	-
	Bundle	2,878	2,692	3,318

Colors	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR .n/a SRI n/a	-	✓	-
Indiana Buff	SR .n/a SRI n/a	✓	-	✓
Sterling	SR .n/a SRI n/a	✓	-	✓
Linen Buff	SR .n/a SRI n/a	-	-	-
Linen Grey	SR .n/a SRI n/a	-	-	-



DARK CHARCOAL



INDIANA BUFF



STERLING



LINEN BUFF



LINEN GREY

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Roof Deck

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - 4 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	18 x 24 ENDURACOLOR	18 x 24 EASYSOFT	18 x 36
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm	60 mm

SQFT PER	Bundle	93.00	69.75	52.31
	Layer	11.63	11.63	8.72
	Sections	-	-	-
	Stone	2.91	2.91	4.36

PER BUNDLE	Layers	8.00	6.00	6.00
	Sections	-	-	-

SOLDIER LNFT PER	SqFt	0.51	0.51	0.68
	Sections	-	-	-
	Layer	5.91	5.91	5.91
	Bundle	47.25	35.44	35.44


SAILOR LNFT PER	SqFt	0.68	0.68	1.35
	Sections	-	-	-
	Layer	7.87	7.87	11.81
	Bundle	62.99	47.24	70.87

UNITS PER	SqFt	0.34	0.34	0.23
	Layer	4.00	-	-
	Bundle	32.00	24.00	12.00


LBS PER	Unit	80	319	290
	Layer	319.00	-	-
	Bundle	2,552	1,914	1,739

Colors	Reflectance	Stock	Stock	Stock
Indiana Buff	SR .n/a SRI n/a	✓	-	✓
Sterling	SR .n/a SRI n/a	✓	-	✓
Linen Buff	SR .n/a SRI n/a	-	SO	SO
Linen Grey	SR .n/a SRI n/a	-	SO	SO

LAYER CONFIGURATION

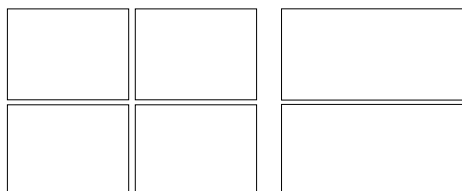

LAYING PATTERNS

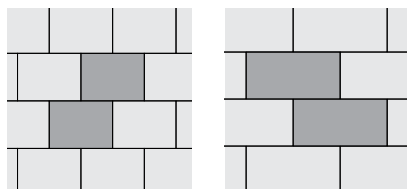

Urban 18x24 RB

Urban 18x36 RB

SINGLE UNITS

SLABS


**18 x 24**  
450x 600 x 60mm  
17 3/4 x 23 5/8 x 2 3/8"  
32 Units/Bundle  
2.91 Sq.Ft./Stone

**18 x 36**  
450 x 900 x 60mm  
17 3/4 x 35 1/2 x 2 3/8"  
12 Units/Bundle  
4.36 Sq.Ft./Stone



INDIANA BUFF

STERLING



LINEN BUFF

LINEN GREY

Notes: Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular

## APPEARANCE

Edge Detail - Rounded

Surface Texture - Smooth

Joint Spacing - n/a

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	18 x 36
Bundle Type	SINGLE
Plant Produced	ONTARIO
Thickness (mm)	100 mm

SQFT PER	Bundle	43.59
	Layer	8.72
	Sections	-
	Stone	4.36

PER BUNDLE	Layers	5.00
	Sections	-

SOLDIER LNFT PER	SqFt	0.68
	Sections	-
	Layer	5.91
	Bundle	29.53


SAILOR LNFT PER	SqFt	1.35
	Sections	-
	Layer	11.81
	Bundle	59.06

UNITS PER	SqFt	0.23
	Layer	-
	Bundle	10.00


LBS PER	Unit	399
	Layer	-
	Bundle	1,994

Colors	Reflectance	Stock
Indiana Buff	SR .52 SRI 61	SO
Sterling	SR .41 SRI 46	SO
Linen Buff	SR .n/a SRI n/a	SO
Linen Grey	SR .n/a SRI n/a	SO

LAYING PATTERNS




Urban 18 x 36 HB



Urban 18 x 36 RB

SINGLE UNITS



**18 x 36**  
450 x 900 x 100mm  
17 3/4 x 35 1/2 x 2 3/8"  
10 Units/Bundle  
4.36 Sq.Ft./Stone



INDIANA BUFF



STERLING



LINEN BUFF



LINEN GREY

**Notes:** Special Order items, lead time is required. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pedestrian, Light Vehicular, Border/Accents

## APPEARANCE

Edge Detail - Zero




Surface Texture - Textured

Joint Spacing - 3-7 mm

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

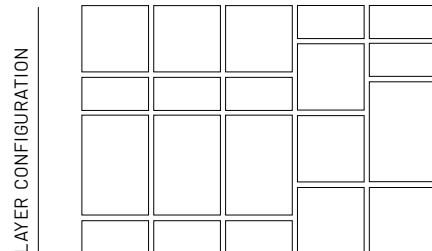

### LARGE RECTANGLE

254 x 380 x 70mm  
10 x 15 x 2 3/4"  
32 Units/Bundle

### SQUARE

254 x 254 x 70mm  
10 x 10 x 2 3/4"  
56 Units/Bundle

### SMALL RECTANGLE

127 x 254 x 70mm  
5 x 10 x 2 3/4"  
72 Units/Bundle

Bundle Type	RANDOM
Plant Produced	MICHIGAN
Thickness (mm)	70 mm

SQFT PER	Bundle	94.19
	Layer	11.77
	Section	-
	Stone	0.59

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	1.24
	Section	-
	Layer	14.57
	Bundle	116.56

UNITS PER	SqFt	1.70
	Section	-
	Bundle	160.00

LBS PER	Layer	367
	Section	-
	Bundle	2,937

Colors	Reflectance	Stock
Beechwood	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓



BEECHWOOD



GRANITE

**Notes: SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.

# Brussels Dimensional Stone®



## APPLICATIONS

Garden Wall, Seat Wall, Outdoor Kitchen, Fire Feature, Water Feature

## APPEARANCE

Surface Texture - Tumbled

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	100 mm

FCFT PER	Bundle	32.00
	Layer	5.33
	Stone	0.33

PER BUNDLE	Layers	6.00
	Sections	4.00

LNFT PER	Bundle	96.00
	Unit	1.00

UNITS PER	SqFt	3.00
	Section	24.00
	Bundle	96.00

LBS PER	Layer	473
	Section	709
	Bundle	2,836

Colors	Reflectance	Stock
Coffee Creek	SR n/a SRI n/a	✓
Charcoal	SR n/a SRI n/a	✓
Limestone	SR n/a SRI n/a	✓
Mahogany Ash	SR n/a SRI n/a	✓
Sandstone	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓



COFFEE CREEK



CHARCOAL



LIMESTONE



MAHOGANY ASH



SANDSTONE



SIERRA

SINGLE UNITS



**STANDARD**  
300 x 200 x 100mm  
11<sup>7</sup>/<sub>8</sub> x 7<sup>7</sup>/<sub>8</sub> x 3<sup>7</sup>/<sub>8</sub>"  
96 Units/Bundle  
.33 Fc.Ft./Stone

SUNSET FIRE PIT KIT

Located on page 92



ROUND



SQUARE

**Notes: SOLD IN FULL BUNDLES ONLY on an optional skid.** Maximum height is 24" (under optimum conditions). \*Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. LedgeStone, Brussels XL complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Structural Walls

## APPEARANCE

Surface Texture – Standard

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD	STANDARD HALF	CORNER 45°	CORNER 90°
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300 mm	300 mm	300 mm	300 mm

FCFT PER	Bundle	6.02	3.00	7.04	7.04
	Layer	6.02	3.00	7.04	7.04
	Stone	6.02	3.00	7.04	7.04

PER BUNDLE	Layers	1.00	1.00	1.00	1.00
	Sections	-	-	-	-

LNFT PER	Bundle	6.02	3.00	-	-
	Unit	6.02	3.00	-	-

UNITS PER	SqFt	0.17	0.33	0.14	0.14
	Section	-	-	-	-
	Bundle	1.00	1.00	1.00	1.00


LBS PER	Layer	1,680	800	1,480	1,320
	Section	-	-	-	-
	Bundle	1,680	800	1,480	1,320

Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	S0	S0	S0	S0



NATURAL

SINGLE UNITS




### STANDARD

1830 x 600 x 300mm  
72 x 23<sup>5</sup>/<sub>8</sub> x 11<sup>1</sup>/<sub>8</sub>"  
1 unit/Bundle  
6.02 Fc.Ft./Stone




### STANDARD HALF

915 x 600 x 300mm  
36 x 23<sup>5</sup>/<sub>8</sub> x 11<sup>1</sup>/<sub>8</sub>"  
1 unit/Bundle  
3.00 Fc.Ft./Stone



### CORNER 45°

1520 x 600 x 300mm  
59<sup>7</sup>/<sub>8</sub> x 23<sup>5</sup>/<sub>8</sub> x 11<sup>1</sup>/<sub>8</sub>"  
1 unit/Bundle  
7.04 Fc.Ft./Stone



### CORNER 90°

1520 x 600 x 300mm  
59<sup>7</sup>/<sub>8</sub> x 23<sup>5</sup>/<sub>8</sub> x 11<sup>1</sup>/<sub>8</sub>"  
1 unit/Bundle  
7.04 Fc.Ft./Stone

**Notes:** Special Order (S0). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. PALLETIZED 2 PIECES PER PALLET. Closed-end coping units are closed on both ends so that they may be used as left or right units. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

# DuraHold® Coping



## APPLICATIONS

Structural Walls

## APPEARANCE

Surface Texture – Standard

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: [contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	COPING HALF	COPING STANDARD	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300 mm	300 mm	300 mm

FCFT PER	Bundle	2.95	6.02	6.02
	Layer	2.95	6.02	6.02
	Stone	2.95	6.02	6.02

PER BUNDLE	Layers	1.00	1.00	1.00
	Sections	-	-	-

LNFT PER	Bundle	-	-	-
	Unit	-	-	-

UNITS PER	SqFt	0.34	0.17	0.17
	Section	-	-	-
	Bundle	1.00	1.00	1.00


LBS PER	Layer	780	1,560	1,560
	Section	-	-	-
	Bundle	780	1,560	1,560

Colors	Reflectance	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO




NATURAL

SINGLE UNITS




### COPING HALF

915 x 600 x 300mm  
36 x 23<sup>5</sup>/<sub>8</sub> x 11<sup>1</sup>/<sub>8</sub>"  
1 unit/Bundle  
2.95 Fc.Ft./Stone



### COPING STANDARD

1830 x 600 x 300mm  
72 x 23<sup>5</sup>/<sub>8</sub> x 11<sup>1</sup>/<sub>8</sub>"  
1 unit/Bundle  
6.02 Fc.Ft./Stone



### CLOSED-END COPING

1830 x 600 x 300mm  
72 x 23<sup>5</sup>/<sub>8</sub> x 11<sup>1</sup>/<sub>8</sub>"  
1 unit/Bundle  
6.02 Fc.Ft./Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** **SOLD IN FULL BUNDLES ONLY** and is produced and sold on an required, refundable skid. **PALLETIZED, 2 PIECES PER PALLET.** Closed-end coping units are closed on both ends so that they may be used as left or right units. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

# DuraHold 2®



## APPLICATIONS

Structural Walls

## APPEARANCE

Surface Texture - Standard

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:  
[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

	STANDARD	CORNER 90°	COPING	COPING CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	300 mm	300 mm	300 mm	300 mm

FCFT PER	Bundle	24.10	16.67	24.08	24.08
	Layer	6.02	4.17	6.02	6.02
	Stone	6.02	4.17	6.02	6.02

PER BUNDLE	Layers	4.00	4.00	4.00	4.00
	Sections	-	-	-	-

LNFT PER	Bundle	24.10	-	24.10	24.10
	Unit	6.02	-	6.02	6.02

UNITS PER	SqFt	0.17	0.24	0.17	0.17
	Section	-	-	-	-
	Bundle	4.00	4.00	4.00	4.00


LBS PER	Layer	938	460	884	884
	Section	-	-	-	-
	Bundle	3,752	1,840	3,536	3,536

Colors	Reflectance	Stock	Stock	Stock	Stock
Natural	SR n/a SRI n/a	SO	SO	SO	SO




NATURAL


SINGLE UNITS




**CORNER 90°**  
900 x 360 x 300mm  
35 1/2 x 14 1/4 x 11 7/8"  
4 unit/Bundle  
4.17 Fc.Ft./Stone



**STANDARD**  
1830 x 360 x 300mm  
72 x 14 1/4 x 11 7/8"  
4 unit/Bundle  
6.02 Fc.Ft./Stone



**COPING**  
1830 x 360 x 300 mm  
72 x 14 1/4 x 11 7/8"  
4 unit/Bundle  
6.02 Fc.Ft./Stone



**CLOSED-END COPING**  
1830 x 360 x 300 mm  
72 x 14 1/4 x 11 7/8"  
4 unit/Bundle  
6.02 Fc.Ft./Stone

**Notes:** Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on an required, refundable skid. Must order corner as a left or right. Closed-end coping units are closed on both ends so that they may be used as left or right units. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soil information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

# Estate Wall™



## APPLICATIONS

Pillar, Steps, Outdoor Kitchen, Fire Feature,  
Water Feature, Structural Walls, Garden Wall, Seat Wall

## APPEARANCE

Surface Texture - Split

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	TAPERED SPLIT	CORNER SPLIT	COPING TAPERED
Bundle Type	RANDOM	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 mm	150 mm	75 mm

FCFT PER	Bundle	31.25	20.83	18.74
	Layer	6.25	4.17	2.34
	Stone	0.52	0.52	0.26

PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	4.00	4.00	3.00

LNFT PER	Bundle	62.30	41.60	66.00
	Unit	1.04	1.04	.92

UNITS PER	SqFt	1.92	1.92	3.84
	Section	15.00	10.00	24.00
	Bundle	60.00	40.00	72.00

LBS PER	Layer	608	452.8	299
	Section	760	566	797
	Bundle	3,040	2,264	2,392

Colors	Reflectance	Stock	Stock	Stock
Granite	SR n/a SRI n/a	✓	✓	✓
Sandstone	SR n/a SRI n/a	✓	✓	✓
Sierra	SR n/a SRI n/a	✓	✓	✓
River	SR n/a SRI n/a	SO	SO	SO



GRANITE



SANDSTONE




SIERRA




RIVER


RANDOM BUNDLE



**LARGE TAPERED**  
380 x 230 x 150mm  
15 x 9 x 5 7/8"  
20 Units/Bundle  
.63 Fc.Ft./Stone




**MEDIUM TAPERED**  
320 x 230 x 150mm  
12 5/8 x 9 x 5 7/8"  
20 Units/Bundle  
.52 Fc.Ft./Stone




**SMALL TAPERED**  
250 x 230 x 150 mm  
9 7/8 x 9 x 5 7/8"  
20 Units/Bundle  
.42 Fc.Ft./Stone

SINGLE UNITS



**CORNER SPLIT**  
320 x 230 x 150mm  
12 5/8 x 9 x 5 7/8"  
40 Units/Bundle  
.52 Sq.Ft./Stone



**COPING TAPERED**  
320 x 300 x 75mm  
12 5/8 x 11 7/8 x 3"  
72 Units/Bundle  
.26 Sq.Ft./Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. LedgeStone™ coping, Brussels Block® XL or Brussels Fullnose™ complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

# Lineo™ Dimensional Stone



## APPLICATIONS

Pillar, Outdoor Kitchen, Fire Feature, Water Feature, Seat Wall, Garden Wall

## APPEARANCE

Surface Texture - Smooth

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

		PILLAR / CORNER
Bundle Type	RANDOM	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	100 mm	100 mm

FCFT PER	Bundle	29.92	29.97
	Layer	9.97	9.99
	Stone	0.50	0.33


PER BUNDLE	Layers	3.00	3.00
	Sections	3.00	-

LNFT PER	Bundle	89.06	-
	Unit	1.48	-

UNITS PER	SqFt	2.01	3.00
	Section	20.00	-
	Bundle	60.00	90.00

LBS PER	Layer	881	893
	Section	881	-
	Bundle	2,643	2,679

Colors	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓
Graphite	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓



GRANITE



GRAPHITE




SANDSTONE

LINEO FIRE PIT




Fire pit Insert  
sold separately


RANDOM BUNDLE



**XL RECTANGLE**  
600 x 200 x 100mm  
23<sup>3</sup>/<sub>8</sub> x 7<sup>7</sup>/<sub>8</sub> x 3<sup>3</sup>/<sub>8</sub>"  
15 Units/Bundle



**LARGE RECTANGLE**  
500 x 200 x 100mm  
19<sup>3</sup>/<sub>4</sub> x 7<sup>7</sup>/<sub>8</sub> x 3<sup>3</sup>/<sub>8</sub>"  
15 Units/Bundle




**RECTANGLE**  
400 x 200 x 100mm  
15<sup>3</sup>/<sub>4</sub> x 7<sup>7</sup>/<sub>8</sub> x 3<sup>3</sup>/<sub>8</sub>"  
15 Units/Bundle



**SMALL RECTANGLE**  
300 x 200 x 100mm  
11<sup>7</sup>/<sub>8</sub> x 7<sup>7</sup>/<sub>8</sub> x 3<sup>3</sup>/<sub>8</sub>"  
15 Units/Bundle

SINGLE UNIT



**PILLAR/CORNER**  
300 x 200 x 100mm  
11<sup>7</sup>/<sub>8</sub> x 7<sup>7</sup>/<sub>8</sub> x 3<sup>3</sup>/<sub>8</sub>"  
90 Units/Bundle  
.33 Fc.Ft./Stone

**Notes: SOLD IN FULL BUNDLES ONLY** and is produced and sold on an optional, refundable skid. Spacing strips are shipped with random wall and pillar bundles to create even spacing between units. LedgeStone® or Unilock Natural Stone complement as possible coping options. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pillar, Steps, Structural Walls, Garden Wall, Seat Wall

## APPEARANCE

Surface Texture – Split

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CORNER DOUBLE SPLIT	TAPERED SPLIT	COPING
Bundle Type	DOUBLE UNIT	DOUBLE UNIT	DOUBLE UNIT
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150 mm	150 mm	75 mm

FCFT PER	Bundle	20.17	20.00	20.34
	Layer	6.72	6.67	2.91
	Stone	1.68	0.67	0.48

PER BUNDLE	Layers	3.00	3.00	7.00
	Sections	4.00	2.00	2.00

LNFT PER	Bundle	-	40.00	82.95
	Unit	-	1.33	1.97

UNITS PER	SqFt	0.59	1.50	2.06
	Section	3.00	15.00	21.00
	Bundle	12.00	30.00	42.00

LBS PER	Layer	440	860	393
	Section	330	1,290	1,375
	Bundle	1,320	2,580	2,750

Colors	Reflectance	Stock	Stock	Stock
Beechwood	SR.n/a SRI n/a	✓	✓	✓
Charcoal	SR.n/a SRI n/a	✓	✓	✓
Granite	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓



BEECHWOOD



CHARCOAL




GRANITE




SANDSTONE

SINGLE UNITS




### CORNER

300 x 200 x 150mm  
11 $\frac{1}{8}$  x 7 $\frac{7}{8}$  x 5 $\frac{7}{8}$ "  
12 Units/Bundle  
1.68 Fc.Ft./Stone



### TAPERED SPLIT

300 x 200 x 150mm  
11 $\frac{1}{8}$  x 7 $\frac{7}{8}$  x 5 $\frac{7}{8}$ "  
30 Units/Bundle  
.67 Fc.Ft./Stone



### COPING

300 x 300 x 75mm  
11 $\frac{1}{8}$  x 11 $\frac{1}{8}$  x 3"  
42 Units/Bundle  
.48 Fc.Ft./Stone

**Notes:** \* TAPERED WALL UNITS ARE DOUBLE UNITS AND ARE SOLD IN FULL BUNDLES ONLY. 12" Coping bundle has 16 units of closed-end coping (8 left and 8 right). Closed-end 12" coping is not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is  $\frac{3}{4}$ " every course or 1 $\frac{1}{2}$ " every 2 courses. Min radius is 5 ft. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.

# Pisa™ Smooth XL



## APPLICATIONS

Pillar, Steps, Garden Wall, Seat Wall

## APPEARANCE

Surface Texture – Smooth

## CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	XL TAPERED	CORNER	COPING
Bundle Type	SINGLE	SINGLE	MULTI-COMPONENT
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150 mm	150 mm	75 mm

FCFT PER	Bundle	20.67	46.52	15.50
	Layer	5.17	11.63	1.94
	Stone	0.65	0.97	0.32

PER BUNDLE	Layers	4.00	4.00	8.00
	Sections	-	-	-

LNFT PER	Bundle	42.00	-	62.99
	Unit	1.31	-	1.31

UNITS PER	SqFt	1.55	1.03	3.10
	Section	-	-	-
	Bundle	32.00	48.00	48.00

LBS PER	Layer	627	695	282
	Section	-	-	-
	Bundle	2,508	2,780	2,256

Colors	Reflectance	Stock	Stock	Stock
Charcoal	SR.n/a SRI n/a	✓	✓	✓
Fieldstone	SR.n/a SRI n/a	✓	✓	✓
Granite	SR.n/a SRI n/a	✓	✓	✓



CHARCOAL




FIELDSTONE




GRANITE

SINGLE UNITS




### XL TAPERED

400 x 300 x 150mm  
15 3/4 x 11 7/8 x 5 7/8"  
32 Units/Bundle  
.65 Fc.Ft./Stone



### CORNER

400 x 200 x 150mm  
15 3/4 x 7 7/8 x 5 7/8"  
48 Units/Bundle  
.97 Fc.Ft./Stone



### COPING - MULTI-COMPONENT

400 x 325 x 75mm  
15 3/4 x 12 3/4 x 3"  
48 Units/Bundle  
.32 Fc.Ft./Stone

**Notes: SOLD IN FULL BUNDLES ONLY.** 12" Coping bundle has 48 units of coping (32 regular coping and 8 closed-end units per bundle). Closed-end 12" coping is not sold separately. Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. Min radius is 7.3' outside, with an 8mm (3 degree). Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). Walls greater than 4' in height require professional engineering. All measurements are nominal. Contact Unilock for more information.

# Quarry™ Smooth Coming Soon



## APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature,  
Garden Wall, Seat Wall

## APPEARANCE

Surface Texture - Standard

## CROSS SECTIONS

Cross Sections are available on Unilock's  
Contractor web site under Products:

**contractor.unilock.com**

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	WALL	CORNER
Bundle Type	RANDOM	SINGLE
Plant Produced	WISCONSIN	WISCONSIN
Thickness (mm)	114 mm	114 mm

FCFT PER	Bundle	33.75	18.24
	Layer	5.63	6.08
	Stone	-	0.38

PER BUNDLE	Layers	6.00	3.00
	Sections	-	-

LNFT PER	Bundle	-	18.24
	Unit	-	0.38

UNITS PER	SqFt	-	2.65
	Section	-	-
	Layer	15.00	16.00
	Bundle	90.00	48.00

LBS PER	Layer	498	641
	Section	-	-
	Bundle	2,988	1,922

Colors	Reflectance	Stock	Stock
Charcoal	SR.n/a SRI n/a	✓	✓
Natural Grey	SR.n/a SRI n/a	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓



CHARCOAL




NATURAL GREY




SANDSTONE


RANDOM BUNDLE



**15" LARGE TAPERED**  
380 x 230 x 114mm  
15 x 9 x 4 1/2"  
30 Units/Bundle  
.33 Fc.Ft./Stone




**12" MEDIUM TAPERED**  
305 x 230 x 114mm  
12 x 9 x 4 1/2"  
30 Units/Bundle  
.33 Fc.Ft./Stone



**9" SMALL TAPERED**  
230 x 230 x 114mm  
9 x 9 x 4 1/2"  
30 Units/Bundle  
.55 Fc.Ft./Stone

SINGLE UNITS



**CORNER**  
306.6 x 114 x 228.6mm  
12 x 9 x 4 1/2"  
48 Units/Bundle  
.38Fc.Ft./Stone

**Notes: SOLD IN FULL BUNDLES ONLY.** Corner and wall bundles are produced and sold on a required, refundable skid. Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgerstone™, Olde Quarry™ Coping, Brussels Block™ XL, Brussels Fullnose™ or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Steps,  
Fire Feature, Seat Wall, Garden Wall


## APPEARANCE

Surface Texture - Textured

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits



BUFF



COASTAL SLATE

	WALL	CORNER	JUMPER	CORNER JUMPER
Bundle Type	RANDOM	RANDOM	RANDOM	SINGLE
Plant Produced	AYR	AYR	AYR	AYR
Thickness (mm)	57 mm	57 mm	114 mm	114 mm

FCFT PER	Bundle	24.30	16.21	13.73	13.54
	Layer	3.0	4.0	3.43	6.77
	Stone	0.19	0.41	0.34	0.85

PER BUNDLE	Layers	8.00	4.00	4.00	2.00
	Sections	-	-	-	-


LNFT PER	Bundle	130.69	-	-	6.56
	Unit	1.02	-	-	0.41

UNITS PER	SqFt	5.27	2.47	2.91	1.18
	Section	-	-	-	-
	Bundle	128.00	40.00	40.00	16.00


LBS PER	Layer	252	293	408	486
	Section	-	-	-	-
	Bundle	2,015	1,173	1,631	973

Colors	Reflectance	Stock	Stock	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓	✓	✓
Coastal Slate	SR n/a SRI n/a	✓	✓	✓	✓

CORNER BUNDLE




**LONG CORNER UNIT**  
450 x 230-250 x 57mm  
17 1/2 x 9-10 x 2 1/4"  
20 Units/Bundle



**SHORT CORNER UNIT**  
375 x 230-250 x 57mm  
14 1/2 x 9-10 x 2 1/4"  
20 Units/Bundle

JUMPER CORNER UNIT  
COMING SOON




**JUMPER CORNER**  
450 x 230-250 x 114mm  
12 x 9-10 x 4 1/2"  
16 Units/Bundle


JUMPER RANDOM BUNDLE  
COMING SOON



**JUMPER UNIT 1**  
200 x 230-250 x 114mm  
8 x 9-10 x 4 1/2"  
16 Units/Bundle



**JUMPER UNIT 2 / 3**  
300 x 230-250 x 114mm  
12 x 9-10 x 4 1/2"  
12 Units/Bundle




**JUMPER UNIT 4**  
425 x 230-250 x 114mm  
17 x 9-10 x 4 1/2"  
12 Units/Bundle

UNITS RANDOM BUNDLE




**STANDARD UNIT 1**  
200 x 230-250 x 57mm  
8 x 9-10 x 2 1/4"  
32 Units/Bundle



**STANDARD UNIT 2**  
300 x 230-250 x 57mm  
12 x 9-10 x 2 1/4"  
32 Units/Bundle



**STANDARD UNIT 3**  
300 x 230-250 x 57mm  
12 x 9-10 x 2 1/4"  
32 Units/Bundle



**STANDARD UNIT 4**  
425 x 230-250 x 57mm  
17 x 9-10 x 2 1/4"  
32 Units/Bundle

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Steps,  
Fire Feature, Seat Wall, Garden Wall


APPEARANCE

Surface Texture - Textured

TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits

		PILLAR UNIT
Bundle Type		SINGLE
Plant Produced		AYR
Thickness (mm)		114 mm
FCFT PER	Bundle	-
	Layer	-
	Stone	-
PER BUNDLE	Layers	2.00
	Sections	-
LNFT PER	Bundle	-
	Unit	-
UNITS PER	SqFt	-
	Sections	-
	Bundle	4.00
LBS PER	Layer	441
	Sections	-
	Bundle	882
Colors		Reflectance
Buff	SR n/a SRI n/a	✓
Coastal Slate	SR n/a SRI n/a	✓



BUFF



COASTAL SLATE

PILLAR UNIT

COMING SOON



500 x 500 x 114mm  
20 x 20 x 4 1/2"  
Center opening 9 x 9"



Completed Unit Shown  
Pillar cap Sold Separately

FIRE PIT KIT

COMING SOON



Fire Pit kit inserts and accessories sold separately.

Notes: All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Seat Wall, Garden Wall, Structural Wall, Steps

## APPEARANCE

Surface Texture - Smooth

## CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	STANDARD CORNER	COPING
Bundle Type	SINGLE	SINGLE
Plant Produced	HARRISON	HARRISON
Thickness (mm)	180 mm	180 mm

FCFT PER	Bundle	23.25	23.25
	Layer	7.75	7.75
	Stone	1.94	1.94

PER BUNDLE	Layers	3.00	3.00
	Sections	3.00	-

LNFT PER	Bundle	39.37	-
	Unit	3.28	-

UNITS PER	SqFt	0.52	0.52
	Section	4.00	-
	Bundle	12.00	12.00

LBS PER	Layer	1,029	1,029
	Section	1,029	-
	Bundle	3,086	3,086

Colors	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	✓
Granite	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓



CHARCOAL




FIELDSTONE




GRANITE

SINGLE UNITS



### STANDARD/CORNER

1000 x 290 x 180mm  
39 3/8 x 11 1/2 x 7"  
12 Units/Bundle  
1.94 Fc.Ft./Stone



### COPING

1000 x 290 x 180mm  
39 3/8 x 11 1/2 x 7"  
12 Units/Bundle  
1.94 Fc.Ft./Stone

**Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid.** Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Structural Wall, Garden Wall, Steps

## APPEARANCE

Surface Texture – Split

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CORNER 90°	CORNER 45°	STANDARD 500	STANDARD 925	COPING	COPING C-E
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	185 mm	185 mm	185 mm	185 mm	185 mm	185 mm

FCFT PER	Bundle	19.11	-	14.43	7.21	14.43	14.43
	Layer	6.37	-	4.81	2.40	4.81	4.81
	Stone	3.19	-	2.41	2.40	2.41	2.41

PER BUNDLE	Layers	3.00	3.00	3.00	3.00	3.00	3.00
	Sections	-	-	3.00	-	3.00	3.00

LNFT PER	Bundle	-	-	24.00	12.00	23.70	23.70
	Unit	-	-	4.00	4.00	3.95	3.95

UNITS PER	SqFt	0.31	-	0.42	0.42	0.42	0.42
	Section	-	-	2.00	-	2.00	2.00
	Bundle	6.00	6.00	6.00	3.00	6.00	6.00


LBS PER	Layer	1,140	1,050	1,140	1,140	1,140	1,140
	Section	-	-	1,140	-	1,140	1,140
	Bundle	3,420	3,150	3,420	3,420	3,420	3,420

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Natural	n/a	S0	S0	S0	S0	S0	✓




NATURAL


SINGLE UNITS




**CORNER 90° SPLIT**  
1100 x 500 x 185mm  
43 3/8 x 19 3/4 x 7 3/8"  
6 Units/Bundle  
3.19 Fc.Ft./Stone




**CORNER 45° SPLIT**  
1100 x 500 x 185mm  
43 3/8 x 19 3/4 x 7 3/8"  
6 Units/Bundle




**STANDARD 500 SPLIT**  
1200 x 500 x 185mm  
47 1/4 x 19 3/4 x 7 3/8"  
6 Units/Bundle  
2.41 Fc.Ft./Stone



**STANDARD 925 SPLIT**  
1200 x 925 x 185mm  
47 1/4 x 36 1/2 x 7 3/8"  
3 Units/Bundle  
2.40 Fc.Ft./Stone



**COPING SPLIT**  
1200 x 500 x 185mm  
47 1/4 x 19 3/4 x 7 3/8"  
6 Units/Bundle  
2.41 Fc.Ft./Stone



**COPING C-E SPLIT**  
1200 x 500 x 185mm  
47 1/4 x 19 3/4 x 7 3/8"  
6 Units/Bundle  
2.41 Fc.Ft./Stone

**Notes:** Special Order (S0). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is sold on a required, refundable skid. Stocked CE is sold by the piece. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at [www.unilock.com](http://www.unilock.com). All measurements are nominal. Contact Unilock for more information.

# SienaStone® Smooth



## APPLICATIONS

Seat Wall, Structural Wall, Steps

## APPEARANCE

Surface Texture - Smooth

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	38½" DOUBLE CORNER	48" WALL	48" COPING	48" COPING CLOSED-END R & L
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY	GORMLEY	GORMLEY
Thickness (mm)	180 mm	180 mm	180 mm	180 mm

FCFT PER	Bundle	15.71	20.93	20.93	20.93
	Layer	5.24	6.98	6.98	6.98
	Stone	5.24	2.33	2.33	2.33

PER BUNDLE	Layers	3.00	3.00	3.00	3.00
	Sections	-	-	-	-

LNFT PER	Bundle	-	36.00	36.00	36.00
	Unit	-	4.00	4.00	4.00

UNITS PER	SqFt	0.19	0.43	0.43	0.43
	Section	-	-	-	-
	Bundle	3.00	9.00	9.00	9.00

LBS PER	Layer	648	1,182	1,185	1,185
	Section	-	-	-	-
	Bundle	1,944	3,546	3,555	3,555

Colors	Reflectance	Stock	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓	✓
Safari	SR.n/a SRI n/a	SO	SO	SO	SO




GRANITE




SAFARI


SINGLE UNITS




**CORNER UNIT 375**  
975 x 375 x 180mm  
38½ x 14 7/8 x 7"  
3 Units/Bundle  
5.24 Fc.Ft./Stone



**STANDARD 375**  
1200 x 375 x 180mm  
47¼ x 14 7/8 x 7"  
9 Units/Bundle  
2.33 Fc.Ft./Stone



**48" COPING**  
1200 x 383 x 180mm  
47¼ x 15 x 7"  
9 Units/Bundle  
2.33 Fc.Ft./Stone



**48" COPING CLOSED-END R OR L**  
1200 x 383 x 180mm  
47¼ x 15 x 7"  
9 Units/Bundle  
2.33 Fc.Ft./Stone

Notes: Sold on a required, refundable skid. CLOSE-END COPING LEFT AND RIGHT ARE SOLD SEPARATELY. All measurements are nominal. Contact Unilock for more information.

# SienaStone® Smooth Step



## APPLICATIONS

Steps

## APPEARANCE

Surface Texture - Smooth

## CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	48" STEP	72" STEP
Bundle Type	SINGLE	SINGLE
Plant Produced	GORMLEY	GORMLEY
Thickness (mm)	180 mm	180 mm

FCFT PER	Bundle	13.95	6.97
	Layer	4.65	3.49
	Stone	2.33	3.49

PER BUNDLE	Layers	3.00	2.00
	Sections	-	-

LNFT PER	Bundle	24.00	11.81
	Unit	4.00	5.91


UNITS PER	SqFt	0.43	0.29
	Section	-	-
	Bundle	6.00	2.00

LBS PER	Layer	1,081	798
	Section	-	-
	Bundle	3,242	1,596


Colors	Reflectance	Stock	Stock
Dusk	SR.n/a SRI n/a	✓	SO
Granite Blend	SR.n/a SRI n/a	✓	SO
Charcoal	SR.n/a SRI n/a	✓	SO
Safari	SR.n/a SRI n/a	✓	SO



DUSK



GRANITE BLEND




CHARCOAL




SAFARI

SINGLE UNITS



### 48" STEP

1200 x 500 x 180mm  
47 1/4 x 19 3/4 x 7"  
6 Units/Bundle  
2.33 Fc.Ft./Stone



### 72" STEP

1800 x 500 x 180mm  
70 7/8 x 19 3/4 x 7"  
2 Units/Bundle  
3.49 Fc.Ft./Stone

Notes: Special Order (SO). Minimum quantities apply. Lead time required. Product is sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

# U-Cara® Multi-Face Wall System

ENDURACOLOR™



## APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature, Fire Feature, Seat Wall, Garden Wall, Retaining Walls under-3', Structural Wall

## APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth, Series Exposed, Umbriano® Mottled & Pitched

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits




1/2 Running Bond



1/2 Running Bond with Linear Accents



1/2 Running Bond with Random Accents




1/2 Running Bond with Paver Accents



Mixed Bond



1/3 Running Bond



Stacked Bond



Stacked Bond with Accents

FASCIA PANELS  
FINISHES



SMOOTH



PITCHED




UMBRIANO



SERIES



SUBWAY



LAVANO

# U-Cara® Multi-Face Wall System

ENDURACOLOR®



## APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature,  
Retaining Walls under-3, Fire Feature, Seat Wall,  
Garden Wall, Structural Wall

## APPEARANCE

Surface Texture - Smooth, Series Exposed, Umbriano®  
Mottled & Pitched


## CROSS SECTIONS

All Cross Sections are available on Unilock's  
Contractor website under Products:  
[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372  
Eligible for LEED v4.1 credits


## U-CARA RETAINING WALL GEOGRID SECTION

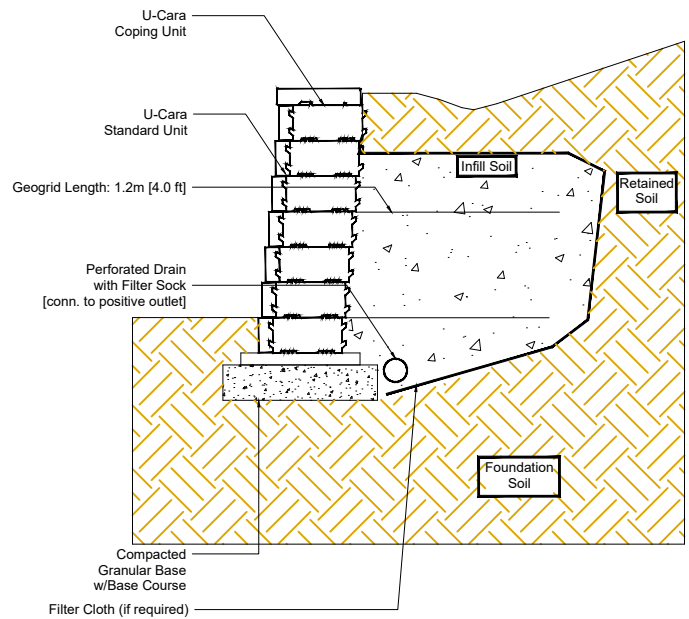

## U-CARA®

### CROSS SECTION

Garden Wall - Max Height 15"

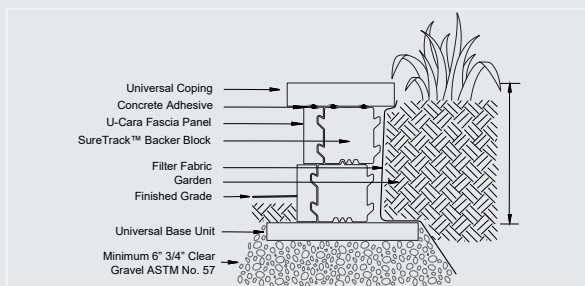


Notes:  
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

## U-CARA®

### CROSS SECTION

Seat Wall - Max Height 21"

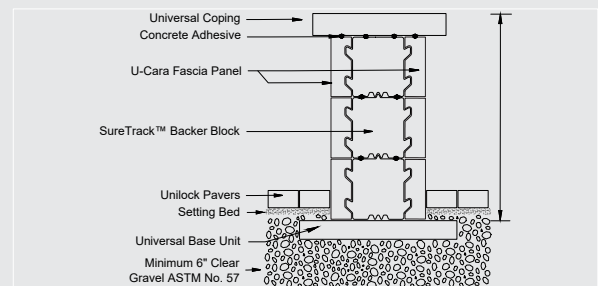

Notes:  
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

	STANDARD 6" FASCIA SMOOTH	CLOSED-END 6" FASCIA SMOOTH	STANDARD 3" FASCIA SMOOTH	STANDARD 6" FASCIA UMBRIANO	CLOSED-END 6" FASCIA UMBRIANO	STANDARD 6" FASCIA PITCHED	CLOSED-END 6" FASCIA PITCHED	STANDARD 3" FASCIA SERIES EXPOSED
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN	GEORGETOWN	GEORGETOWN	MICHIGAN	MICHIGAN	CHICAGO
Thickness (mm)	150 mm	150 mm	71 mm	150 mm	150 mm	150 mm	150 mm	71 mm

FCFT PER	Bundle	61.52	54.18	63.20	61.52	54.18	61.52	54.18	59.32
	Layer	10.25	9.03	10.53	10.25	9.03	10.25	9.03	9.89
	Stone	0.73	1.29	0.19	0.73	1.29	0.73	1.29	0.18

PER BUNDLE	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00	6.00
	Sections	-	-	-	-	-	-	-	-


LNFT PER	Bundle	129.50	104.86	-	-	104.86	129.50	104.86	-
	Unit	1.54	2.50	-	-	2.50	1.54	2.50	-

UNITS PER	SqFt	1.37	0.78	5.32	1.37	0.78	1.37	0.78	5.66
	Section	-	-	-	-	-	-	-	-
	Bundle	84.00	42.00	336.00	84.00	42.00	84.00	42.00	336.00

LBS PER	Layer	252	207	242	252	213	291	236	250
	Section	-	-	-	-	-	-	-	-
	Bundle	1,513	1,240	1,453	1,513	1,240	1,745	1,415	1,501


Colors	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a SRI n/a	✓	✓	-	-	-	-	-	-
Fossil	SR.n/a SRI n/a	✓	✓	-	-	-	✓	✓	-
Granite Fusion	SR.n/a SRI n/a	✓	✓	-	-	-	✓	✓	-
Opal Blend	SR.n/a SRI n/a	✓	✓	-	-	-	-	-	-
Indiana Buff	SR.n/a SRI n/a	✓	✓	-	-	-	-	-	-
Sierra	SR.n/a SRI n/a	✓	✓	-	-	-	✓	✓	-
Sterling	SR.n/a SRI n/a	**	**	-	-	-	-	-	-
French Grey	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Grenada White	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Midnight Sky	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Summer Wheat	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Winter Marvel	SR.n/a SRI n/a	-	-	-	**	**	-	-	-
Onyx Black	SR.n/a SRI n/a	-	-	-	-	-	-	-	✓

SINGLE PANEL BUNDLE




**6" STANDARD FASCIA PANEL**  
5 7/8 x 18 3/8 x 2 3/8"  
150 x 466 x 60mm  
84 Units/Bundle  
.73 Sq.Ft./Stone


2 UNIT CLOSE-END BUNDLE



**3" FASCIA PANEL**  
2 7/8 x 9 x 2 3/8"  
71 x 231 x 60mm  
336 Units/Bundle  
.18 Sq.Ft./Stone



**STANDARD FASCIA HALF PANEL**  
5 7/8 x 9 1/4 x 2 3/8"  
150 x 233 x 60mm



**CLOSED-END FASCIA PANEL**  
5 7/8 x 20 7/8 x 2 3/8"  
150 x 530 x 60mm

*Close-End panels:  
24 rights/18 lefts per pallet*

**Notes:** Special Order (SO). Minimum quantities apply. **\*\*Lead time required.** SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

	LAVANO STANDARD	SUBWAY STANDARD	CLOSED END/ HALF PANEL
Bundle Type	SINGLE	SINGLE	BUNDLE
Plant Produced	MICHIGAN	MICHIGAN	MICHIGAN
Thickness (mm)	150 mm	150 mm	150 mm

FCFT PER	Bundle	61.52	61.52	54.18
	Layer	10.25	10.25	9.03
	Stone	0.73	0.73	1.29


PER BUNDLE	Layers	6.00	6.00	6.00
	Sections	-	-	-

LNFT PER	Bundle	129.50	129.50	104.86
	Unit	1.54	1.54	2.50

UNITS PER	SqFt	1.37	1.37	0.78
	Section	-	-	-
	Bundle	84.00	84.00	42.00


LBS PER	Layer	252.00	252.00	207.00
	Section	-	-	-
	Bundle	1,513	1,513	1,240

Colors	Reflectance	Stock	Stock	Stock
Indiana Buff	SR n/a SRI n/a	-	-	✓
Granite Fusion	SR n/a SRI n/a	✓	-	✓
Fossil	SR n/a SRI n/a	✓	-	✓
Dark Charcoal	SR n/a SRI n/a	-	✓	✓
Opal Blend	SR n/a SRI n/a	-	✓	✓

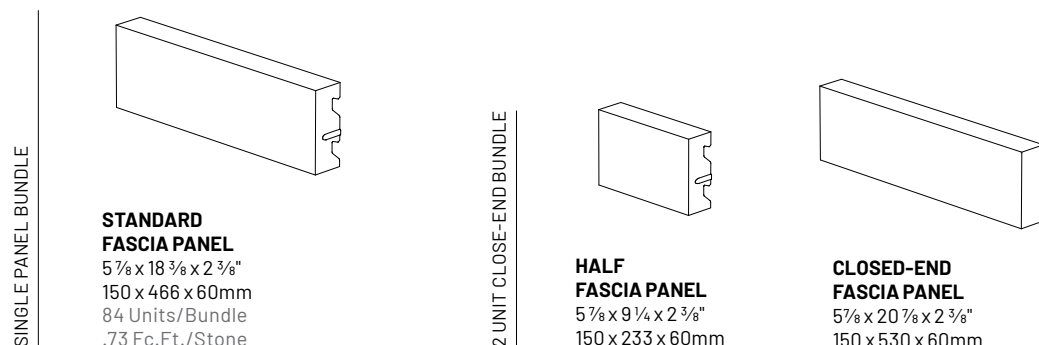


Notes: **SOLD IN FULL BUNDLES.** Produced and sold on a required refundable skids. Sure Track Large Backer Units when used as corners in a pillar application, can achieve 42 FFT/bundle or .757 FFT/unit.


SMOOTH PANELS




DARK CHARCOAL




FOSSIL




GRANITE FUSION




INDIANA BUFF



OPAL BLEND



SIERRA  
*(while supplies last)*



STERLING

UMBRIANO® PANELS  
\*\*Lead time required



FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

PITCHED PANELS



FOSSIL



GRANITE FUSION




SIERRA

SERIES 3" PANEL




ONYX BLACK


SUBWAY PANELS



DARK CHARCOAL




OPAL BLEND




INDIANA BUFF

LAVANO PANELS



GRANITE FUSION



FOSSIL

# U-Cara® Multi-Face Wall System



	LARGE BACKER	STANDARD BACKER
Bundle Type	SINGLE	SINGLE
Plant Produced	MICHIGAN	MICHIGAN
Thickness (mm)	150 mm	150 mm

FCFT PER	Bundle	15.82	33.91
	Layer	3.96	11.30
	Stone	0.28	0.32


PER BUNDLE	Layers	4.00	3.00
	Sections	-	-

LNFT PER	Bundle	-	69.99
	Unit	-	0.67


UNITS PER	SqFt	3.54	3.10
	Section	-	-
	Bundle	56.00	105.00

LBS PER	Layer	503	812
	Section	-	-
	Bundle	2,012	2,437

COMPONENTS




**SURE TRACK  
LARGE BACKER**  
5<sup>7</sup>/<sub>8</sub> x 6<sup>7</sup>/<sub>8</sub> x 11<sup>5</sup>/<sub>8</sub>"  
150 x 175 x 294mm



**SURE TRACK  
STANDARD BACKER**  
5<sup>7</sup>/<sub>8</sub> x 5<sup>7</sup>/<sub>8</sub> x 7<sup>7</sup>/<sub>8</sub>"  
150 x 150 x 195mm

RECOMMENDED  
BASE UNIT



**UNIVERSAL BASE**  
482 x 355 x 55mm  
19 x 14 x 2 1/4"  
54 Units/Bundle

EXTRA  
COMPONENTS




**SURE TRACK  
CORNER INSERT**  
L = 2"  
50mm  
40pcs/bag

**Notes:** Sold in full pallets only on a refundable skid. All measurements are nominal. Contact Unilock for more information.

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

**With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.**

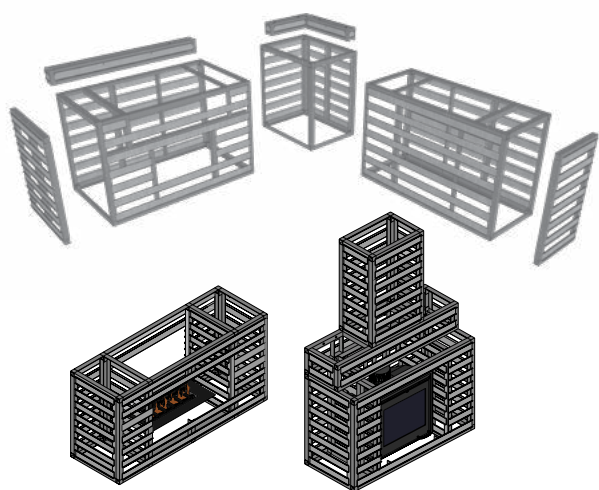

NO.	MODEL	DESCRIPTION
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39" (10/PACK)
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
UCARA000009	UL-FIR	U-CARA FIREPLACE
UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
UCARA000017	UL-FIR-CH	U-CARA FIREPLACE CHIMNEY UNIT
UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
UCARA000020	UL-FIR-RTN-OS	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36"-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-OS	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 64½"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (18⅜" x 18⅜")
UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
UCARA004003	UL-ECK-OS-36	END CLAD KIT 36.5" OS



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR:  
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS:  
8' LENGTH - SOLD IN PACKS OF 10 PIECES



# U-Cara® Wall Mount System Installation

## Alignment Bar

- 38-5/8" tall (up to 7 courses of 6" fascia panels)
- Pre-punched to accommodate both 3" & 6" panels
- Eliminates the need to measure for rail spacing
- Speeds up installation
- 10 per bundle



## Horizontal Rail

- 8' long with pre-punched holes every 8"
- Heavy duty galvanized steel
- 10 per bundle




## U-Cara Fascia Panels

- EnduraColor Technology
- Available in 4 different finishes and several colors
- Apply adhesive and hang on wall mount system



### Wood Substrate Application

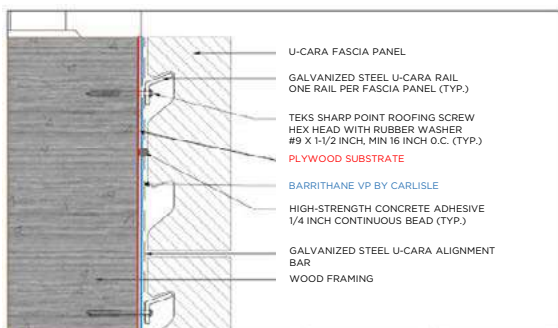

#### Barrithane VP


- Damp surface tolerant
- Immediately rain resistant
- Single coat application
- Apply as low as 15° F



#### Sharp Point Roofing Screw #12 x 1-1/2"

- Hex head
- Rubber washer
- Corrosion resistant coating


### Concrete Substrate Application

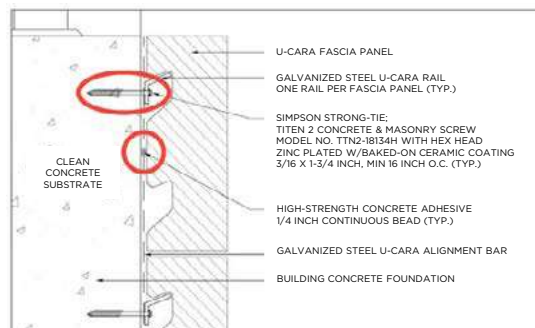

#### Titen 2 Hex Head 3/16" x 1-3/4"


- Improved thread design
- Increased load capacity
- Reduced snapping
- 450+ pound tension load
- 275+ pound shear load

# U-Cara® Wall Mount System Installation

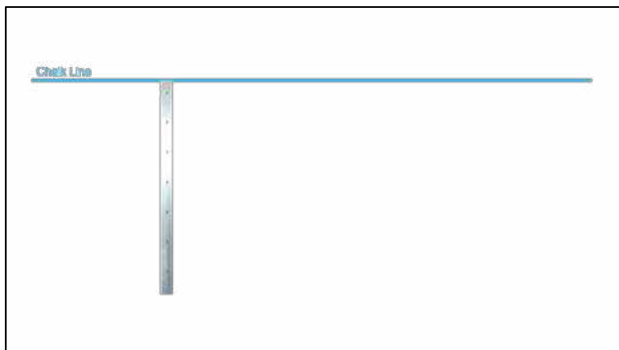


**Step 1:** Determine finished top height, mark with chalk line. Align orange painted end of alignment bar with chalk line.

Alignment bars should be placed 16" in from end of horizontal rail, and every 32".

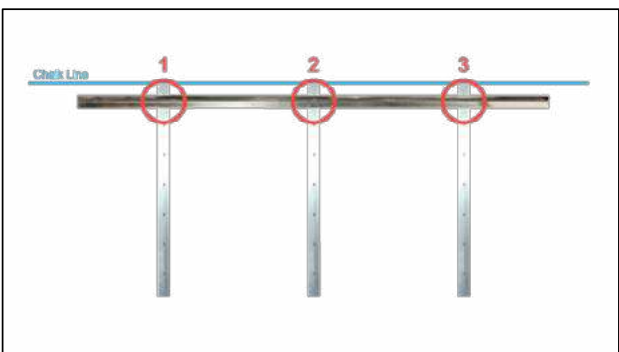


**Step 2:** Fasten both horizontal rail and alignment bars to substrate at points 1, 2, and 3; ensuring the rail is level.

The first four screws are the most important, as they will establish your grid pattern for all your horizontal rails in this section.

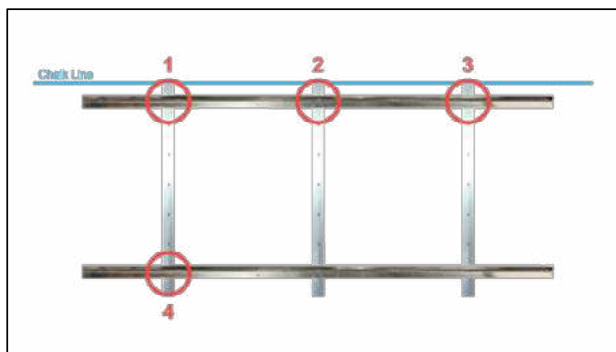


**Step 3:** Fasten the bottom horizontal rail and alignment bar at point 4; use a level or a square to ensure alignment bar is plumb

You have now established your grid pattern for the rest of your horizontal rails in this section.

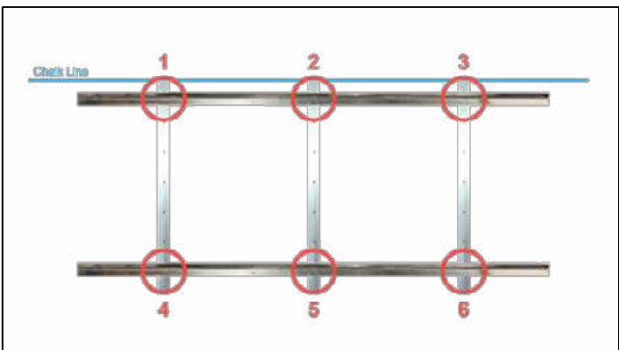

**Step 4:** Fasten the bottom horizontal rail and alignment bars at points 5 and 6.

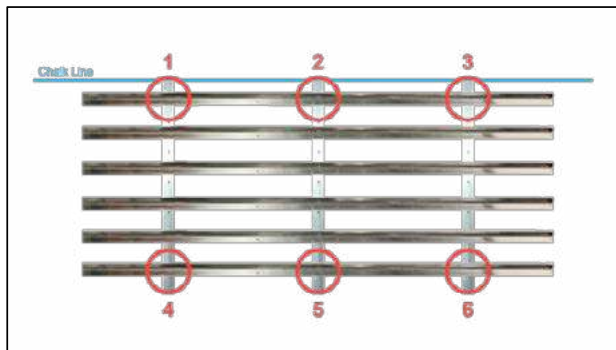

**Step 5:** Fasten remaining horizontal rails.

All horizontal rail should be fastened to substrate every 16" and on both ends.



## APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

## APPEARANCE

Surface Texture - Smooth

## CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

[contractor.unilock.com](http://contractor.unilock.com)

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CHAMFERED	FULLNOSE
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm

FCFT PER	Bundle	9.30	9.30
	Layer	-	-
	Stone	0.39	0.39

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Bundle	47.24	47.24
	Unit	1.97	1.97

UNITS PER	SqFt	-	-
	Layer	4.00	4.00
	Bundle	24.00	24.00

LBS PER	Unit	63	63
	Sections	337	337
	Bundle	1,510	1,510

Colors	Reflectance	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	✓	✓
Granite Fusion	SR n/a SRI n/a	✓	✓
Oat Beige	SR n/a SRI n/a	✓	✓
Opal Blend	SR n/a SRI n/a	✓	✓



DARK CHARCOAL



GRANITE FUSION




OAT BEIGE




OPAL BLEND

SINGLE UNITS



**CHAMFERED**  
600 x 360 x 60 mm  
24 x 14 x 2 3/8  
24 Units/Bundle



**FULLNOSE**  
600 x 360 x 60 mm  
24 x 14 x 2 3/8  
24 Units/Bundle

**Notes:** Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

# Brussels Fullnose™



## APPLICATIONS

Steps, Pillar, Water Feature, Pool Coping, Wall Coping, Fire Feature

## APPEARANCE

Surface Texture - Textured

## TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1 credits

	STANDARD
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70 mm

FCFT PER	Bundle	-
	Layer	-
	Stone	-

PER BUNDLE	Layers	8.00
	Sections	4.00

LNFT PER	Bundle	96.00
	Unit	0.50

UNITS PER	SqFt	-
	Section	48.00
	Bundle	192.00

LBS PER	Layer	384
	Section	769
	Bundle	3,074

Colors	Reflectance	Stock
Charcoal	SR. n/a SRI n/a	✓
Coffee Creek	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Mahogany	SR. n/a SRI n/a	✓
Sandstone	SR. .41 SRI 46	✓
Sierra	SR. n/a SRI n/a	✓



DARK CHARCOAL



COFFEE CREEK



LIMESTONE



MAHOGANY



SANDSTONE



SIERRA

SINGLE UNIT



**6 x 12**  
150 x 300 x 70mm  
5 7/8 x 11 7/8 x 2 3/4"  
192 Units/Bundle

**Notes: SOLD IN FULL PALLETS ONLY.** Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

# Ledgestone™ Coping & Closed-End Coping



## APPLICATIONS

Pillar, Outdoor Kitchen, Water Feature,  
Fire Feature, Structural Wall, Steps

## APPEARANCE

Surface Texture - Textured

## TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits

	FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	60 mm	70 mm	70 mm	70 mm	70 mm

FCFT PER	Bundle	5.12	5.52	5.52	6.87	6.87
	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57

PER BUNDLE	Layers	13.00	4.00	4.00	4.00	4.00
	Sections	-	-	-	-	-

LNFT PER	Bundle	26.00	24.00	24.00	30.00	30.00
	Unit	2.00	2.00	2.00	2.50	2.50


UNITS PER	SqFt	2.54	2.18	2.18	1.75	1.75
	Section	-	-	-	-	-
	Bundle	13.00	12.00	12.00	12.00	12.00

LBS PER	Layer	56	193	199	282	279
	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	✓	✓	✓	✓	✓
Gray	SR.n/a SRI n/a	✓	✓	✓	✓	✓




BUFF




GREY

SINGLE UNITS




### FULLNOSE COPING

610 x 305 x 60mm  
24 x 12 x 2 3/8"  
13 unit/Bundle  
.39 Fc.Ft./Stone




### STANDARD COPING

610 x 305 x 70mm  
24 x 12 x 2 3/4"  
12 unit/Bundle  
.46 Fc.Ft./Stone




### STANDARD CLOSED-END COPING

610 x 305 x 70mm  
24 x 12 x 2 3/4"  
12 unit/Bundle  
.46 Fc.Ft./Stone



### LARGE COPING

762 x 343 x 70mm  
30 x 13 1/2 x 2 3/4"  
12 unit/Bundle  
.57 Fc.Ft./Stone



### LARGE CLOSED-END COPING

762 x 343 x 70mm  
30 x 13 1/2 x 2 3/4"  
12 unit/Bundle  
.57 Fc.Ft./Stone

**Notes:** Lead time is required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping are rock faced on three sides. Fullnose is rounded only on one side, no Closed-end available. All measurements are nominal. Contact Unilock for more information.

# Ledgestone™ Pillar Caps, Steps & Fire Pit Coping



## APPLICATIONS

Pillar, Steps, Step Treads

## APPEARANCE

Surface Texture - Textured


## TECHNICAL INFORMATION

Conforms to ASTM C 1776

Eligible for LEED v4.1 credits



BUFF



GREY

	48" STEP	72" STEP	24" PILLAR CAP	29" PILLAR CAP	21½" FIRE PIT COPING
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT	CHICAGO	CHICAGO	CHICAGO
Thickness (mm)	150 mm	150 mm	100 mm	100 mm	65 mm

FCFT PER	Bundle	5.91	8.86	3.28	-	-
	Layer	1.97	2.95	0.66	-	-
	Stone	1.97	2.95	0.66	-	-

PER BUNDLE	Layers	3.00	3.00	5.00	5.00	6.00
	Sections	-	-	-	-	-


LNFT PER	Bundle	12.00	18.00	10.04	-	-
	Unit	4.00	6.00	2.01	-	-

UNITS PER	SqFt	0.51	0.34	1.52	-	-
	Section	-	-	-	-	-
	Bundle	3.00	3.00	5.00	5.00	24.00

LBS PER	Layer	556	813	159	206	142
	Section	-	-	-	-	-
	Bundle	1,669	2,439	795	1,030	852

Colors	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	SR.n/a SRI n/a	✓	SO	✓	✓	✓
Grey	SR.n/a SRI n/a	✓	SO	✓	✓	✓


SINGLE UNIT




**ROCKFACE  
FIRE PIT COPING**  
254 x 546 x 65mm  
10 x 21½ x 2 ⅝"  
24 Units/Bundle

8 pieces per Fire pit,  
Outside Diameter 54"  
Inside Diameter 34"

SINGLE UNITS  
PILLAR CAP




**ROCKFACE 24"**  
610 x 610 x 100mm  
24 x 24 x 3 ⅞"  
5 Units/Bundle  
.66 Fc.Ft./Stone




**ROCKFACE 28"**  
740 x 740 x 100mm  
28 ½ x 28 ½ x 4"  
5 Units/Bundle  
.66 Fc.Ft./Stone

SINGLE UNITS  
STEPS



**ROCKFACE 48"**  
1220 x 610 x 150mm  
48 x 24 x 5 ⅞"  
3 Units/Bundle  
1.97 Fc.Ft./Stone



**ROCKFACE 72"**  
1830 x 610 x 150mm  
72 x 24 x 5 ⅞"  
3 Units/Bundle  
2.95 Fc.Ft./Stone

**Notes: Special Order (SO).** Minimum quantities apply. **Lead time required.** Produced and sold on a required, refundable skid. Step is rock-faced on 3 sides, while the Pillar Caps are rock-faced on all 4 sides. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pillar, Water Feature, Pool Coping  
Fire Feature, Wall Coping, Steps

## APPEARANCE

Edge Detail - Chamfered, Rounded  
Surface Texture - Umbriano Mottled

## TECHNICAL INFORMATION

Conforms to ASTM C 936  
Eligible for LEED v4.1 credits

	CHAMFERED 24 x 14	FULLNOSE 24 x 14
Bundle Type	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm

FCFT PER	Bundle	9.30	9.30
	Layer	-	-
	Stone	0.39	0.39

PER BUNDLE	Layers	6.00	6.00
	Sections	-	-

LNFT PER	Bundle	47.20	47.20
	Unit	0.98	0.98

UNITS PER	SqFt	-	-
	Layer	4.00	4.00
	Bundle	24.00	24.00

LBS PER	Unit	63	63
	Layer	252	252
	Bundle	1,510	1,510

Colors	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	SO	SO
Grenada White	SR .45 SRI 52	SO	SO
Midnight Sky	SR .17 SRI 15	SO	SO
Summer Wheat	SR .42 SRI 48	SO	SO
Winter Marvel	SR .35 SRI 38	SO	SO



FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY




SUMMER WHEAT




WINTER MARVEL

SINGLE UNITS



**CHAMFERED**  
600 x 360 x 60 mm  
24 x 14 x 2 3/8"  
24 Units/Bundle



**FULLNOSE**  
600 x 360 x 60 mm  
24 x 14 x 2 3/8"  
24 Units/Bundle

**Notes:** Special Order (SO). Minimum quantities apply. Lead time required. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

## APPEARANCE

Surface Texture - Standard / Smooth

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	COPING / STEP
Bundle Type	SINGLE
Plant Produced	MICHIGAN
Thickness (mm)	70 mm

FCFT PER	Bundle	17.44
	Layer	2.18
	Stone	0.36


PER BUNDLE	Layers	8.00
	Sections	-

LNFT PER	Bundle	75.90
	Unit	1.58

UNITS PER	SqFt	2.75
	Section	-
	Bundle	48.00

LBS PER	Layer	343
	Section	-
	Bundle	2,747

Colors	Reflectance	Stock
Dark Charcoal	SR.n/a SRI n/a	✓
Natural	SR.n/a SRI n/a	✓
Sandstone	SR.n/a SRI n/a	✓



DARK CHARCOAL




NATURAL



SANDSTONE

SINGLE UNITS



## UNIVERSAL COPING

482 x 355 x 70mm

19 x 14 x 2 3/4"

48 Units/Bundle

.36 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is shipped on an optional, refundable skid. Two (2) End Coping units per Layer (1 Left & 1 Right). All measurements are nominal. Contact Unilock for more information.



## APPLICATIONS

Pillar, Water Feature, Pool Coping, Fire Feature, Wall Coping, Steps

## APPEARANCE

Surface Texture - Smooth

## TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	CHAMFERED 36 x 19	FULLNOSE 36 x 19	CHAMFERED 24 x 14	FULLNOSE 24 x 14
Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
Plant Produced	ONTARIO	ONTARIO	ONTARIO	ONTARIO
Thickness (mm)	60 mm	60 mm	60 mm	60 mm

FCFT PER	Bundle	3.75	3.75	9.30	9.30
	Layer	-	-	11.63	11.63
	Stone	0.31	0.31	1.94	1.94

PER BUNDLE	Layers	6.00	6.00	8.0	8.0
	Sections	-	-	-	-

LNFT PER	Bundle	35.4	35.4	47.20	47.20
	Unit	2.9	2.9	0.98	0.98

UNITS PER	SqFt	-	-	-	-
	Layer	2.00	2.00	4.00	4.00
	Bundle	12.00	12.00	24.00	24.00

LBS PER	Unit	128.7	128.7	63	63
	Layer	257	257	252	252
	Bundle	1,544	1,544	1,510	1,510

Colors	Reflectance	Stock	Stock	Stock	Stock
Dark Charcoal	SR.n/a SRI n/a	✓	✓	✓	✓
Indiana Buff	SR.n/a SRI n/a	✓	✓	✓	✓
Sterling	SR.n/a SRI n/a	✓	✓	✓	✓
Linen Buff	SR.n/a SRI n/a	S0	S0	S0	S0
Linen Grey	SR.n/a SRI n/a	S0	S0	S0	S0



DARK CHARCOAL



INDIANA BUFF



STERLING




LINEN BUFF




LINEN GREY


SINGLE UNITS




**36 x 19 FULLNOSE**  
900 x 485 x 60 mm  
35½ x 19 x 2⅜  
12 units/Bundle



**24 x 14 FULLNOSE**  
600 x 300 x 60 mm  
23 ⅝ x 11 ⅞ x 2 ¾  
24 units/Bundle



**36 x 19 CHAMFERED**  
900 x 485 x 60 mm  
35½ x 19 x 2⅜  
12 units/Bundle



**24 x 14 CHAMFERED**  
600 x 300 x 60 mm  
23 ⅝ x 11 ⅞ x 2 ¾  
24 units/Bundle

**Notes: Special Order (S0). Lead time required (\*).** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

# Sunset Fire Pit Kit



### APPLICATIONS

Fire Feature

### APPEARANCE

Surface Texture - Standard / Tumbled

### TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

	ROUND
Bundle Type	SINGLE
Dimension Metric	1300 x 1300 x 300mm
Dimension Imperial	51 1/4 x 51 1/4 x 11 7/8"
Thickness (mm)	300 MM

DIAMETER (inch)	Outside	52.00
	Inside	36.00
	Insert	34.00

LAYER PER UNIT	3.00
UNIT PER LAYER	20.00
UNIT PER PALLET	60.00

LBS PER PALLET	1,125
----------------	-------

Colors	Reflectance	Stock
Coffee Creek	SR. n/a SRI n/a	✓
Limestone	SR. n/a SRI n/a	✓
Mahogany Ash	SR. n/a SRI n/a	✓
Sandstone	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	✓



COFFEE CREEK



LIMESTONE




MAHOGANY ASH




SANDSTONE



SIERRA

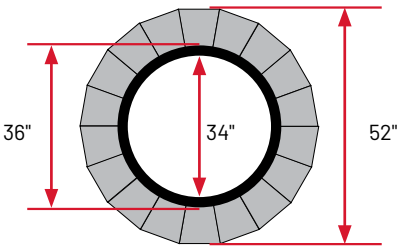

INSERT DIAMETER  
34"

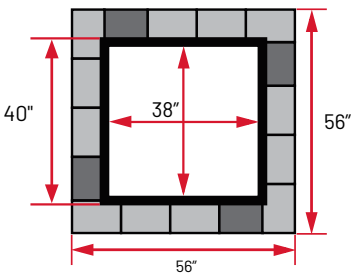

INSERT DIAMETER  
38"

SINGLE UNIT



**SUNSET ROUND W/INSERT**  
1300 x 1300 x 300mm  
51 1/4 x 51 1/4 x 11 7/8"

**FIRE PIT INSERTS SOLD SEPARATELY**

### FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

Notes: All measurements are nominal. Contact Unilock for more information.

# Unilock Elements

## TUSCANY COLLECTION



**TUSCANY FIREPLACE**  
Sandstone with Copthorne® (3 Color Blend)  
**SPECIAL ORDER**



**TUSCANY FIREPLACE**  
Sierra with Copthorne® (3 Color Blend)  
**SPECIAL ORDER**

### WEIGHTS

#### Tuscany Collection

Fireplace Top – 2,925 lbs  
Fireplace Bottom – 4,225 lbs  
Wood Boxes – 4,005 lbs  
Arched Hearth – 1,170 lbs

## BARCELONA COLLECTION



### WEIGHTS:

#### Barcelona Collection

Fireplace Top – 2,725 lbs  
Fireplace Bottom – 4,170 lbs  
Wood Boxes – 4,200 lbs  
Arched Hearth – 1,200 lbs

**BARCELONA FIREPLACE**  
Sierra with Umbriano® (Summer Wheat)  
**SPECIAL ORDER**




### MODA

#### **SPECIAL ORDER**

### WEIGHTS

Moda Base – 3,550 lbs  
Moda Top – 1,915 lbs

The Moda pre-built fireplace is constructed from Lineo Dimensional Stone and Series™ accent.

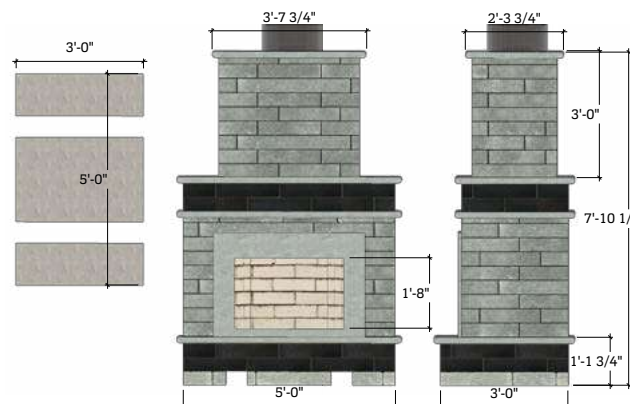

Note: Items shown are Tuscany units. Please contact Unilock for more information on special order items. Units and measurements may not be exactly as shown.

## TUSCANY & BARCELONA FIREPLACE



**Note:** Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL- approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

NEW from Unilock, the SkyView Roof Deck System is a comprehensive product lineup that includes adjustable pedestals, invisible wind uplift solutions, roof deck slabs, wood tile, and fiberglass grate. Together, these components offer unmatched flexibility, empowering designers to create elevated rooftop spaces that are visually stunning, durable and high-performing. The system's intuitive design also simplifies installation for contractors, ensuring efficiency without compromising quality. With SkyView, reimagine what's possible for roof deck design and construction.

## SKYVIEW PEDESTAL SYSTEM

Unilock SkyView Pedestals are patent pending, fully adjustable structural supports for elevating paving materials. Our pedestals ensure unmatched flexibility, ease of installation and durability.



- 1/2" and 1" Waffles available for low profile applications.
- 10" Cores and Collars available for taller applications up to 31".

## SKYVIEW GRATE

When this 48 x 48" fibreglass grate is placed on SkyView Pedestals, it creates a stable surface for installing smaller paver units on an elevated roof deck.



## SKYVIEW WIND UPLIFT SYSTEM

When the below components are combined with the SkyView Pedestal System, they create a rafted paving surface with an invisible tie-down mechanism that resists wind uplift pressures without compromising project aesthetics.

### 1 | Wind Uplift Slabs

24 x 24" slabs featuring a kerfed undercut that spans the length of two opposing sides.



### 2 | Wind Uplift Kit

This 3-part kit is easily added to SkyView Pedestals to form a tie-down mechanism that works seamlessly with our Wind Uplift Slabs.



SCREW



KEYWAY  
LOCKDOWN BAR



PUCK

## SKYVIEW IPE WOOD TILE

Sustainably harvested and FSC certified, these 24 x 24" tiles have a dense hardwood composition that makes them perfect for use on SkyView Pedestals.



Ask your Unilock Representative about the made to order roof deck slab options available for your projects.

## Paver Cleaners



### POLYBIND™ SHAMPOO

CLN047 (1 Gallon) 1 & 5 Gallon available 1 US Gal/Box

Polybind Shampoo removes ground-in dirt from the surface of concrete pavers and natural stones. This shampoo will make your patio, walkway, driveway, etc. look clean and vibrant. Use it before sealer application to assure you of a deeper penetration into the cleaned surface. No muriatic acid in product – washes off with water.

Note: **5 Gallon is SPECIAL ORDER**



### POLYBIND OIL & GREASE REMOVER

CLN050 (1 Quart) 1 Quart Container (6/Box)

Polybind Oil & Grease Remover is effective in removing oil and grease from the surface of concrete pavers and natural stones. Easy to use – dissolves, dislodges and removes oil and grease. No hydrochloric acid in product – washes off with water.



### POLYBIND EFFLORESCENCE CLEANER

CLN045 (1 Gallon) & CLN046 (5 Gallon)

Polybind Efflorescence Cleaner will remove any efflorescence stains trapped in the concrete paver and natural stone pores. It will make the pavers look more clean and vibrant. This efflorescence cleaning is a necessary step before a sealer is applied. The sealer will be able to get a deeper penetration into the now-clean pores.



### POLYBIND RUST REMOVER

CLN051 (1 Quart) (6/Box)

Polybind Rust Remover is effective in removing rust from the surface of concrete pavers. Contains no muriatic acid.



### POLYBIND SEALER STRIPPER

CLN068 (1 Gallon) & CLN069 (5 Gallon)  
(Box of 4 x 1 US Gallon)

Polybind Sealer Stripper is extremely effective for removing either water-based or solvent-based sealers from concrete pavers or stone. It is environmentally responsible (water-based), yet it removes multiple layers in a single application. It is a paste which is easily applied with a brush or roller.



### GATOR EFFLORESCENCE AND SLURRY REMOVER

5 Gallon; 48 pails

Will remove any efflorescence stains trapped in the concrete pavers, wet cast and natural stone pores. It will make the pavers look more clean and vibrant without discoloring or damaging the paver surface. This Professional Grade efflorescence cleaner is also a slurry remover. This is a necessary step prior to sealer application to allow for a deeper penetration into the now clean pores. acid in product – washes off with water.

## Sealers



### SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

SEAL151 1 gallon; 4/case; 36 cases/skid (27 cases)

- Seals & enhances surface while hardening jointing sand.
- Deeply enhances surface with stain-resistant semi-gloss finish.
- Formulated with antifungal to stop growth of mold, fungi and moss.
- Rain safe in 90 minutes; approx.
- Coverage 80-120 sq.ft.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



### POLYBIND™ HIGH GLOSS SEALER (BLUE)

SEAL145 (1 Gallon) & SEAL146 (5 Gallon)  
1 & 5 Gallon Available Box of 4 x 1 US Gallon

This water based sealer offers a high-gloss finish for all concrete pavers that have never been sealed or pre-sealed in the manufacturing process.



### POLYBIND ECO SEAL HIGH GLOSS SEALER + COLOR ENHANCER WB

SEAL185 (1 Gallon) & SEAL186 (5 Gallon)  
1 & 5 Gallon Available Box of 4 x 1 US Gallon

This high gloss sealer is 100% pure, high-grade acrylic used to seal concrete, clay pavers and natural stone, by penetrating deep into their pores, thus reducing oil and dirt penetration as well as protecting them from the corrosion of de-icing salt. It provides a high-gloss finish as well as vibrant color enhancement.

## Sealers (continued)



### POLYBIND ECO SEAL LOW GLOSS SEALER + COLOR ENHANCER WB

SEAL178 (1 Gallon) & SEAL179 (5 Gallon)  
1 & 5 Gallon Available Box of 4 x 1 Us Gallon

Polybind Eco Low Gloss Sealer + Color Enhancer is 100% pure high-grade acrylic for concrete pavers. It penetrates deep into the concrete paver pores, reducing oil and dirt penetration as well as corrosion from de-icing salt.



### POLYBIND™ ECO SEAL LOW GLOSS

SEAL147 (1 Gallon) & SEAL148 (5 Gallon)  
Box of 4 x 1 US Gallon

Polybind Eco Seal Low Gloss is 100% pure, high-grade acrylic used to seal concrete pavers, clay pavers and natural stone. It penetrates deep into the pavers and natural stone pores, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



### POLYBIND RESEALER SB

SEAL155 (1 Gallon) & SEAL156 (5 Gallon)  
1 & 5 Gallon Available Box of 4 x 1 Us Gallon

Polybind Resealer penetrates the existing sealer and reactivates it to create rejuvenated protection of the paver surface, thus reducing oil and dirt penetration as well as protecting it from the corrosion of de-icing salt.



### POLYBIND™ WET LOOK SEALER SB

SEAL143 (1 Gallon) & SEAL144 (5 Gallon)  
1 & 5 Gallon Available Box of 4 x 1 Us Gallon

This wet look sealer is made from acrylic-based polymers that penetrate deep into the concrete paver and natural stone pores. This results in reduced oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.



### POLYBIND™ SEAL SATIN LOOK

SEAL141 for 1 Gallon & SEAL142 for 5 Gallon

Sealer is made from acrylic-based polymers. Polybind Satin Look Sealer penetrates deep into the concrete pavers, thus reducing the oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt. Specifically formulated to be used on unsealed surfaces only.



### GATOR SEAL SLIT FOAM ROLLER FOR SOLUTION BASED SEALERS 9.5"

CLN070

For Semi-Rough and Rough Surfaces

- Applies Sealers Evenly
- Works Great on Textured Surfaces
- Remains Spongy and will not Compress



### BACK TO BLACK SEALER FOR NATURAL STONE SEAL 238

- Quickly revives and enhances faded dark limestone
- Provides a strong and uniform color enhancement
- Excellent water resistance
- Single coat provides a rich enhanced color
- 1 liter covers up to 40m2 based on one coat, depending on surface porosity

## Adhesives



### SUREBOND SB-10 ADHESIVE

ADH002 28oz tube; 12/Case; 60 Cases/skid  
(Conforms to UN-STD. 1804, ASTM 2339-70 & FHA UM-60)

Surebond SB-10 adhesive is a fast set-up, quick curing, superior strength, structural grade hardscape adhesive. Adheres well in extreme conditions such as temperatures ranging from 0° to 100° F, frozen and/or damp substrates.

Light Tan • Low odor • VOC compliant • 900 psi



### POLYBIND XTRA PERFORMANCE (XP) POLYURETHANE ADHESIVE

ADH035 (10 oz) & ADH038 (28 oz)  
10 oz. Tube = 20' at 1/4" bead & 28 oz.  
Tube = 52' at 1/4" bead

Formulated for fast cure time, extra bond strength and durability. Applications include concrete pavers and walls, overlays, pool copings, steps & wall caps, wetcast and natural stones. It can be applied above 32° & on either dry or damp surfaces. Drying times vary depending on factors such as humidity, porosity, temperature and materials bonded together.



### TECHNISEAL STRUCTURE BOND™ FOAM ADHESIVE

ADH048 (24 oz)

Canister = 600 linear feet at 3/8" bead (12/Case)

An innovative super-strength foam adhesive that bonds a wide range of construction products with an application time up to 50% faster than with conventional tube adhesives. Materials are bonded in just 8 minutes and adhesive is fully cured within 24 hours. Made from high-quality modified polyurethanes with excellent long-term resistance to weathering, dilute acids and caustic solutions.



### TECHNISEAL STRUCTURE BOND™ GUN II TOOL378 1 Dispenser (12/Case)

The Gun II dispenser for application enables you to gain access to hard-to-reach areas and greatly limits excessive spillage or dripping, while also reducing user-fatigue, with total control on product flow. The gun allows for a precise adhesive delivery with a single pull of the trigger that stops as soon as you let go. Requires no pumping, cutting or puncturing of cartridge nozzles.



### TECHNISEAL STRUCTURE BOND™ FOAM CLEANER

CLN093 (16 oz) 1 Canister = (12/Case)

Structure Bond Gun Cleaner is a powerful cleansing formula that rapidly dissolves any uncured Structure Bond adhesive residue. Specifically designed to fit Structure Bond Gun II dispensers. Simply screw a canister onto the gun and press the trigger to cleanse the tool from uncured product. The built-in sprayer nozzle will dissolve any spill, drip or adhesive residue.

# Sands



## ALLIANCE GATOR NITRO SAND

SAND196 - Beige, SAND197 - Gray, SAND198 - Black  
SAND236-Silver  
Packaging: 40 lb/bucket 48 buckets/skid  
Coverage: 10-56sf = 50lb bucket.  
Ready-to-use mixture of calibrated sand and resins which cure when exposed to air.  
This product hardens from top to bottom of the joint. This can be installed in wet or dry weather, in joints ranging from a minimum 3/16" (5mm) to a maximum 2" (50mm) joint width. The minimum jointing depth is 1" (25mm).



**RAPID FLOW TECHNOLOGY**

## GATOR NITRO-X FINE JOINT **NEW**

Black | Grey | Gunmetal | Taupe | Platinum | Vanilla  
27.5 lbs Pail; 48 Pails/Pallet

- Rapid Flow Technology
- Fast and simple installation
- Xtra Fine gradation jointing sand
- Xtra Low permeability
- Xtra Strength from top to bottom \*\*\*
- Apply rain or shine
- Joint width from 1/8" to 2" (3 mm to 50 mm)\*\*\*\*
- 5-year limited warrantywidth.

\*\*\* Gator Nitro-X Fine Joint Sand will harden from top to bottom up to 2 3/8" (60 mm).

\*\*\*\* Ensure there is ABSOLUTELY NO paver, porcelain tile or stone movement prior to installation to prevent joint cracking.



## POLYBIND G2 COMPLETE SAND

SAND152 (Nevada Tan), SAND153 (Oxford Gray),  
SAND154 (Jet Black), SAND155 (Ivory White -  
**SPECIAL ORDER** - Full Skid Quantities Only)  
Packaging: 50lb/bag 56 bags/skid  
65-85 sq.ft./bag for narrow joints  
Designed for paver joints up to a maximum of 4 inches. Drainage & Non-Drainage Applications  
No Dust - No Haze - No Blower - One Watering.  
This is the cleanest, fastest and easiest polymeric sand installed in the industry. It can be used with concrete pavers, wetcast & natural stones.  
This is recommended for use in patios, pool decks, walkways, driveways, etc.



## POLYBIND DUST

SAND072 (Dust Tan), SAND073 (Dust Gray)  
A unique mixture of polymer binders and calibrated stone available in Beige and Gray. Once Polybind Dust sets, it becomes very firm and locks between the wet cast or natural stone joints while still retaining flexibility and providing a long lasting, durable jointing material. Polybind Dust is recommended for a variety of uses including pool decks, patios, footpaths, and any other pedestrian applications.



## SEK POLYSWEEP SAND

SAND045 (Tan), SAND046 (Gray), SAND147 (Platinum)  
Packaging: 50 lb/bag 56 bags/skid  
For concrete paver, cast stone pavements, slabs and natural stone joints up to 3/4". PolySweep polymeric sand is a blend of native sands and high quality synthetic polymers specially formulated to allow the joints to expand and contract with elements such as extreme heat, extreme cold and freeze/thaw cycles.



## EUROSTONE BOND

SAND097 - SLATE GRAY 50lb. bag (56 bags/skid)  
For Driveway Aprons Application & Cobblestone Joints up to 3.5cm / 1"  
Eurostone Bond is the first polymeric sand specifically designed for drainage and non-drainage base systems and can be used with natural stones and cobblestone. Recommended for many uses, including streets, plazas (pedestrian and vehicular traffic) paths, sloping areas, around pools, etc. Sets above freezing (0°C / 32°F) and can be used for joints up to a maximum of 3.5 cm / 1".



## PS-1500 RJS REACTIVE RESIN JOINT SAND SYSTEM

SAND233 (Pebble), SAND234 (Slate),  
SAND235 (Driftwood)  
Made with a new generation synthetic resin that hardens when it reacts with the air. It can be used in new or existing installations to create beautiful yet extremely durable hardened sand joints that will withstand the rigors of residential vehicle traffic and harsh freeze/thaw conditions.



## SEK JOINTING SAND

SAND001-1 - Tan  
SAND148 - Platinum  
Kiln dried and angular shaped in order to flow easily and stay in place.  
Packaging: 50 lb/bag 56 bags/skid

## Sands continued

### ESTIMATED POLYMERIC SAND COVERAGE BY PRODUCT

PRODUCT	COVERAGE PER BAG
Anchorlock™	60-65 sf
Artline™	60-65 sf
Beacon Hill™	50-60 sf
Boulevard™	50-60 sf
Bristol Valley™	55-60 sf
Brussels Block®	80-85 sf
Copthorne®	50-60 sf
Courtstone®	30-40 sf
Eco-Optiloc™	40-50 sf
Eco-Priora™	50-60 sf
Eco-Promenade®	40-50 sf
Granito™	50-60 sf
Hex Paver™	50-60 sf
Hollandstone™	70-75 sf
Holland Premier™	70-75 sf
Il Campo®	70-75 sf
Mattoni™	45-50 sf
Natural Stone	N/A
Nordic Cobble™	20-25 sf
Porcelain	N/A
Promenade™	20 sf
Promenade Ecoterra®	50-60 sf
Richcliff®	45-50 sf
Series™	50-60 sf
Skyline™	60-65 sf
Thornbury™ (Permeable)	40-45 sf
Town Hall®	20-30 sf
Tribeca Cobble™	40-45 sf
Treo®	50-60 sf
Umbriano® 6cm Random	55-60 sf
Umbriano® 7cm	60-65 sf
Urban™	55-60 sf
Westport™	55-60 sf

*Approximate Coverage: Jointing material type, paver thickness, joint width, and bedding course type may affect quantities required. Installation practices may affect the amount of sand used per product.*

### IMPORTANT NOTICE

**1. EXTRA CARE** Extra Care must be exercised when using polymeric sand on all Unilock products.

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface. Therefore extra diligence must be taken to pre-clean the surface prior to “wetting the sand in” and squeegee off the surface post application. Failure to do so will result in a “whitish haze” on the surface that is difficult to remove.

**2. DO NOT USE** Polymeric Jointing Sand on the following products:

Series™ Il Campo® Tribeca Cobble™

*If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. **Contact your local Unilock office for recommended sealants and application specifics.***

**3. IMPORTANT COMPACTION NOTICE:** Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric Sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

**Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.**

**NOTICE:** Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Additionally, any issues related to the installation or application of polymeric sand, jointing sand, sealers or cleaners should be handled through the manufacturer of that specific product.

# Edge Restraints


## SNAPEDGE - One-Piece Edging That Does It All!

### EDGE001


- Only one part required for straight runs or curved installations
- Built-in connector fastens one piece to the next
- Convenient 96" size, makes them easy to transport
- Unique 'Snip and Flex' feature speeds installations of curves and corners without pre-planning
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation
- Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging

### PRODUCT INFORMATION:


8'(96") length pcs.  
Sidewall: 1 7/8"  
Pieces per Pallet: 672 (5,376 In. ft.)  
Pieces per Bundle: 24 (192 In. ft.)  
Bundles per Pallet: 28  
Pallet Weight: 3,360 lbs.  
Pallet Size: 98" l x 48" w x 50" h




## TIPS FOR QUICK AND EASY INSTALLATION WITHOUT PRE-PLANNING




Sharp Inside Corner




Sharp Outside Corner




Proper Wall Installation



Gentle Outside Curves



Gentle Inside Curves



Pieces Snap Together

## POLYBIND EDGE EDGING

- Rigid has Twist & Lock connection system
- Rigid can be changed to a partial flex by cutting the bridge support
- Tile Edge provides stability and strong lateral support for all porcelain tile installations



### RIGID EDGE

#### EDGE056 - Rigid

#### Product Information:

8'(96") length pcs.  
Sidewall: 1 3/4"  
Pieces per Bundle: 24 (192 In. ft.)  
Pieces per Pallet: 672 (5376 In. ft.)



### TILE EDGE:

#### EDGE061 - Tile Edge

#### Product Information:

8'(96") length pcs.  
Sidewall: 5/8"  
Pieces per Bundle: 24 (192 In. ft.)  
Pieces per Pallet: 384 (3072 In. ft.)

## SNAPEDGE PERMEABLE PAVER EDGING

### EDGE033 SPECIAL ORDER

- Designed specifically for permeable pavement with open-graded base material.
- Holds pavement edges securely in place.
- Does straight and curved edges.



### PRODUCT INFORMATION:

8'(96") length pcs.  
Weight per Unit: 2.5 lbs.  
Pieces per Pallet: 64 (512 In. ft.)  
Pallet Weight: 320 lbs.

## ALLIANCE GATOR XTREME EDGE

### EDGE076

- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Packaging: 50 lb bag / 56 bags per skid.
- Coverage: 20-25 sqft coverage per bag for a 60mm paver.



## Gator Base



**FEATURES:** For Pedestrian use only. Replaces concrete foundations and is used to replace 6" of crushed stone. The interlocking panels distribute all dynamic and static loads to a very wide area, practically eliminating any pressure on the ground. Gator Base is a unique evolution in base technology. Manufactured using lightweight high-density polypropylene. Environmentally friendly and 100% recyclable. Extremely durable, will not degrade in the ground. Designed with LOCK-N-GO tongue and groove system. Packaging: 10 units per pack, 12 packs per Box, 120 units per pallet SAND109

## Gator Base Screws

### GATOR BASE SCREWS

FAB033 - 1 Box of 50

- Fastens Gator Edge to Gator Base
- Reinforces the outside perimeter, creating strong lateral support



## Drainage, Separation and Reinforcement



### GATOR GRID 30-30

Gator Grid 30-30, a biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes. It has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating.

Packaging & Unilock SKU

4' x 50' - FAB070 / 6' x 50' - FAB071 / 6' x 150' - FAB072



### GATOR FABRIC NON-WOVEN 3.5

Gator Fabric Non-Woven 3.5 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging & Unilock SKU

4' x 100' - FAB038 / 6' x 100' - FAB040



### GATOR FABRIC NON-WOVEN 4.4

Gator Fabric Non-Woven 4.4 geotextile is ideal for drainage, filtration and will allow water flow in a paver or retaining wall application. It is designed for soil separation for added stability, has high strength and is dimensionally stable.

Packaging & Unilock SKU

4' x 100' - FAB044 / 3' x 100' - FAB043 / 6' x 100' - FAB046



### GATOR FABRIC WOVEN 5

Gator Fabric Woven 5 is a woven geotextile made from polypropylene yarns and can achieve higher tensile strength at low elongation. It is an excellent heavy-loading geotextile, ideal for driveways, alleyways, pathways and retaining walls.

Packaging & Unilock SKU

4' x 100' FAB049 / 6.25' x 300' - FAB052

## Miscellaneous Items

### X & T SLAB SPACERS

RS-ACC237 - X Spacers; 2" x 2"; 250 pcs./bag

RS-ACC236 - T Spacers; 2" x 1"; 250pcs./bag

- Unilock recommends using slab spacers when installing Arcana on an open grade surface
- "T" spacers are needed for running bond patterns; "X" spacers for stack bond patterns. Please contact your sales manager for more information
- X & T bagged separately



When figuring spacer quantity needed:

\*Using T-Spacers for running bond pattern

Divide total SqFt by 1.78

\*Using X-Spacers for stack bond pattern

Divide total SqFt by 3.56



### DRIVEGRID™ TENSAR GRID 12.5x120

FAB104

- 12.5' x 120' Roll - 1,572 sq. ft./54 lbs per roll

# Large Equipment



Model L



Model Mini P



Model PM



All terrain  
pallet mover

- Install up to 700 sq. ft. per hour!
- Access tight or narrow areas
- Eliminate the need for a forklift on site
- Reduce labor costs
- Reduce shoulder, hand & knee pain and injury
- Improve your bottom line

## SPECIAL ORDER

Contact your local rep for details.

## VIBRATORY PLATES CF 3

- Operating weight: 108 kg
- Working width: 50cm
- Centrifugal force: 20 Kn
- Frequency: 95Hz
- Engine: Hatz 1 B 20 (Diesel)
- Power output, max.: 3.4 kW (4.6 HP)



## SPECIAL ORDER

## VPR 700 PAVER ROLLER

- Centrifugal Force: 3,147 lbs
- Machine Weight: 386 lbs
- Base Plate Width: 26"
- Engine: Honda GX160 Four-Stroke



## SPECIAL ORDER

## VPR 450 PAVER ROLLER

- Centrifugal Force: 1,798 lbs
- Machine Weight: 238 lbs
- Base Plate Width: 16.5"
- Engine: Honda GX160 Four-Stroke



## SPECIAL ORDER

## U-LEVEL™

- Easy to use
- Accurate readings
- Low maintenance
- Works in difficult locations
- Large working area



A PRECISION TOOL NO  
HARDSCAPER SHOULD BE WITHOUT

## ONLINE ORDERING ONLY

## BASE THICKNESS CHART (GENERAL)

APPLICATION	GRAVEL BASE	BEDDING COURSE	BACKFILL WIDTH (WALLS ONLY)
PATIOS, WALKWAYS, POOL DECKS	4" - 6" (10cm - 15cm)	1" (2.5cm)	
DRIVEWAYS	8" - 12" (20cm - 30cm)	1" (2.5cm)	
STEPS, PLANTERS, RAISED PATIOS	6" (15cm)	0 - 1/8" (0cm - .3cm)	8" - 12" (20cm - 30cm)
RETAINING WALLS UNDER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - .3cm)	12" (30cm)
RETAINING WALLS OVER 18" (45cm)	6" (15cm)	0 - 1/8" (0cm - .3cm)	16" (50cm)

Soil condition - In areas with poor soil conditions, (e.g., heavy clay, disturbed soils) increase the depth of the base to provide more stability. Where poor soil conditions exist, it may be advisable to contract an engineer when constructing a retaining wall in excess of 24" in height.

Area = (Length) x (Width)

Area of a Circle = 3.14 x (Radius) x (Radius)

Area of a Half Circle = 1.57 x (Radius) x (Radius)

Area of a Quarter Circle = .78 x (Radius) x (Radius)

Area of a Triangle = (1/2 Base) x (Height)

Perimeter of a Circle = 6.28 x (Radius)

Perimeter of a Half Circle = 3.14 x (Radius)

Perimeter of a Quarter Circle = 1.57 x (Radius)

Metric Equivalents

1 inch = 2.5400 centimeters

1 foot = 0.3048 meter

1 yard = 0.9144 meter

1 sq. foot = 929.030 sq. centimeters

1 sq. meter = 1.196 sq. yards

27 cu. feet = 1 cu. yard

1 centimeter = 0.3937 inch


1 meter = 39.3701 inches

## THE IMPORTANCE OF ASPECT RATIO


Simply defined, aspect ratio is the overall length of a paver divided by its height.

LENGTH/HEIGHT = ASPECT RATIO


If an insufficient aspect ratio is used, any flexing or rocking caused by movement on the surface such as vehicular traffic, could result in breakage of the paver units. Not only is this breakage unsightly, but it can also compromise the integrity of the segmental system.



**OVER 5 : 1**  
Pedestrian Only




**4 : 1**  
Light-Duty  
Vehicular



**3 : 1 OR LESS**  
Heavy-Duty  
Vehicular

## LAYING PATTERN CONSIDERATIONS

The laying pattern used in your application can also add a significant amount of strength to your design. A herringbone pattern provides the best 'lock-up', adding strength against rotational forces such as tires at a roadway intersection in the same way the 'L' shaped paver provides maximum performance.

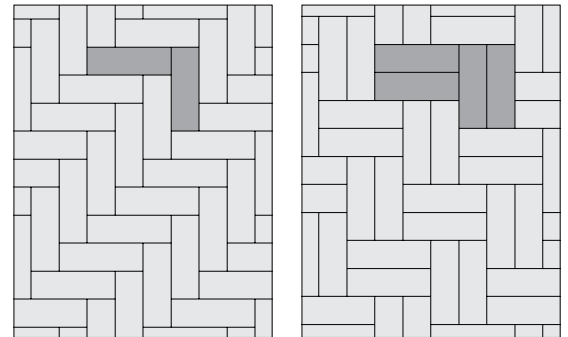

## HEAVY-DUTY CONSIDERATIONS



Unilock has a variety of shapes and sizes available to fit your heavy-duty application and style preferences. For maximum performance where twisting and tipping will be factors, consider the unique "L" interlocking shape as it provides superior resistance under heavy loads. The patented locking features work in tandem with the "tri-axis" technology. The result? A stronger, more stable pavement surface.

Heavy-duty Unilock paving systems are also designed for rapid mechanized installation, making them competitive and affordable.



### H-20 & HS-20 LOAD RATING

Similar to top of deck stresses per AASHTO H-20 loading conditions (32,000 lbs/14,500 kg), Unilock pavers can support 3-4 axle vehicles. This would include delivery, fire and semi-truck and trailer traffic in light-duty roadway applications.



*Speak with your Unilock Representative for more information.*

## BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.3	0.5	0.8	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2.8	3.0
100	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
150	0.8	1.5	2.3	3.0	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0
200	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0
250	1.3	2.5	3.8	5.0	6.3	7.5	8.8	10.0	11.36	12.5	13.8	15.0
300	1.5	3.0	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0
350	1.8	3.5	5.3	7.0	8.8	10.5	12.3	14.0	15.8	17.5	19.3	21.0
400	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.2	22.0	24.0
450	2.3	4.5	6.8	9.8	11.3	13.5	15.8	18.0	20.3	22.5	24.8	27.0
500	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0
550	2.8	5.5	8.3	11.0	13.8	16.5	19.3	22.0	24.8	27.5	30.3	33.0
600	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0
650	3.3	6.5	9.8	13.0	16.3	19.5	22.8	26.0	29.3	32.5	35.8	39.0
700	3.5	7.0	10.5	14.0	17.5	21.0	24.5	28.0	31.5	35.0	38.5	42.0
750	3.8	7.5	11.36	15.0	18.8	22.5	26.3	30.0	33.8	37.5	41.3	45.0
800	4.0	8.0	12.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	44.0	48.0
850	4.3	8.5	12.8	17.0	21.3	25.5	29.8	34.0	38.3	42.5	46.8	51.0
900	4.5	9.0	13.5	18.0	22.5	27.0	31.5	36.0	40.5	45.0	49.5	54.0
950	4.8	9.5	14.3	19.0	23.8	28.5	33.3	38.0	42.8	47.5	52.3	57.0
1000	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0

## BASE DEPTH CHARTS (CUBIC YARDS)

Bedding Course												
Square Feet	1"	2"	3"	4"	5"	6"	7"	8"	9"	10"	11"	12"
50	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.7	1.9
100	0.3	0.6	0.9	1.2	1.5	1.9	2.2	2.5	2.8	3.1	3.4	3.7
150	0.5	0.9	1.4	1.9	2.3	2.8	3.2	3.7	4.2	4.6	5.1	5.6
200	0.6	1.2	1.9	2.5	3.1	3.7	4.3	4.9	5.6	6.2	6.8	7.4
250	0.8	1.5	2.3	3.1	3.9	4.6	5.4	6.2	6.9	7.7	8.5	9.3
300	0.9	1.9	2.8	3.7	4.6	5.6	6.5	7.4	8.3	9.3	10.2	11.1
350	1.1	2.2	3.2	4.3	5.4	6.5	7.6	8.6	9.7	10.8	11.9	13.0
400	1.2	2.5	3.7	4.9	6.2	7.4	8.6	9.9	11.1	12.3	13.6	14.8
450	1.4	2.8	4.2	5.6	6.9	8.3	9.7	11.1	12.5	13.9	15.3	16.7
500	1.5	3.1	4.6	6.2	7.7	9.3	10.8	12.3	13.9	15.4	17.0	18.5
550	1.7	3.4	5.1	6.8	8.5	10.2	11.9	13.6	15.3	17.0	18.7	20.4
600	1.9	3.7	5.6	7.4	9.3	11.1	13.0	14.8	16.7	18.5	20.4	22.2
650	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.1	20.1	22.1	24.1
700	2.2	4.3	6.5	8.6	10.8	13.0	15.1	17.3	19.4	21.6	23.8	25.9
750	2.3	4.6	6.9	9.3	11.6	13.9	16.2	18.5	20.8	23.1	25.5	27.8
800	2.5	4.9	7.4	9.9	12.3	14.8	17.3	19.8	22.2	24.7	27.2	29.6
850	2.6	5.2	7.9	10.5	13.1	15.7	18.4	21.0	23.6	26.2	28.9	31.5
900	2.8	5.6	8.3	11.1	13.9	16.7	19.4	22.2	25.0	27.8	30.6	33.3
950	2.9	5.9	8.8	11.7	14.7	17.6	20.5	23.5	26.4	29.3	32.3	35.2
1000	3.1	6.2	9.3	12.3	15.4	18.5	21.6	24.7	27.8	30.9	34.0	37.0

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

# IMPORTANT NOTES

---

## UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

## TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee\* on the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.



Scan for full Guarantee details

\*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at [unilock.com](http://unilock.com) and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

## PRODUCT HANDLING WARNING

**Bundle Straps Under Tension** - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at [Unilock.com](http://Unilock.com).

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

## TRADEMARK & LEGAL INFORMATION

Umbriano® is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to [www.unilock.com](http://www.unilock.com) for availability. Measurements throughout this portfolio are nominal.

©2025 Hengestone Holdings, Inc.

## UNILOCK FINISHES

When considering the finish, think about the look you are trying to achieve as well as practical performance. From traditional smooth and flagstone, to enhanced surfaces, modern granite looks and timeworn patina, Unilock offers it all.

### SMOOTH FINISH



Sometimes, simple is best. A smooth surface suits contemporary styles and is available in a wide variety of shapes for paving and verticals.

### FLAGSTONE FINISH



Popular for centuries, a flagstone finish never fails to add warmth to outdoor spaces.

### ANTIQUED FINISH



A variety of methods are used to achieve this distressed finish, but in every case, it lends a relaxed, rustic vibe.

### TIMEWORN



Our exclusive Elegance line offers the look of centuries-old cobblestone, brick, and natural stone with unsurpassed product durability.

### BRUSHED FINISH




Only Unilock offers Il Campo®, a unique surface enhanced with graphically interesting etched lines. This finish has long been a favorite of commercial designers.

### UMBRIANO




Umbriano is an exclusive finish only available from Unilock with color and granite particles that are randomly dispersed to achieve a unique mottled surface that is reminiscent of granite.

### EXPOSED GRANITE

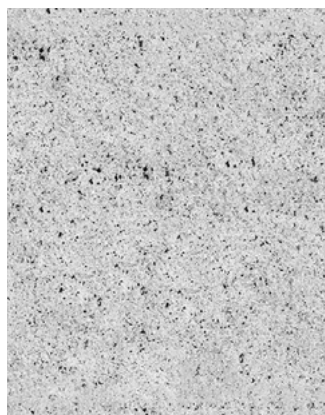

Granite, Quartz and Marble particles are embedded in the product's surface and then revealed using additional processing methods.

### ENHANCED SURFACE

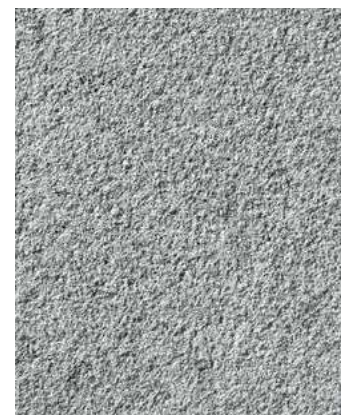

The surface of these products is enhanced using a special process to reveal a variety of distinctive colors and textures.

# UNILOCK<sup>®</sup>

## COLLECTIONS

### Beacon Hill<sup>™</sup>

Coping

Wall

Pavers  
& Slabs

### Umbriano

Wall

Coping

Pavers  
& Slabs



#### **DESIGNED TO TAKE THE GUESSWORK OUT OF PRODUCT SELECTION.**

Streamline the process by offering pavers, walls, steps and coping that will work well together. **Scan to explore our full range of collections.**



TRANSFORMING  
HARDSCAPES

# LET'S BUILD YOUR BUSINESS TOGETHER.

**CHICAGO**  
(630) 892-9191

**MILWAUKEE**  
(262) 742-3890

**KANSAS**  
(913) 417-7985

**BOSTON**  
(508) 278-4536

**NEW YORK**  
(845) 278-6700

**MID-ATLANTIC**  
(202) 798-2060

**MICHIGAN**  
(248) 437-7037

**ONTARIO**  
(416) 646-9000

**QUÉBEC**  
(450) 546-2797

**CINCINNATI / KY  
/ TN / IN**  
(513) 202-0219

**OHIO / WESTERN PA  
/ WNY & CNY**  
(330) 927-4000



UNILOCK.COM | 1-800-UNILOCK