

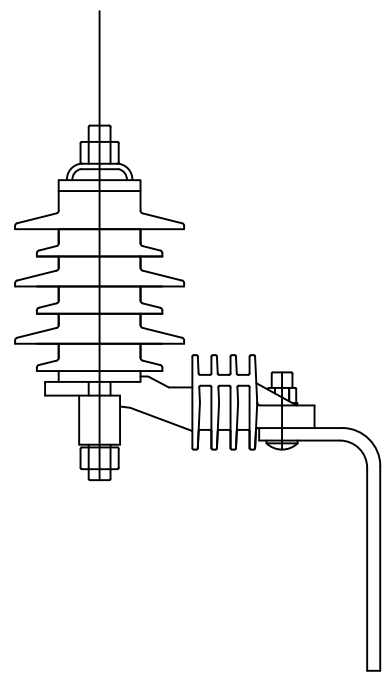
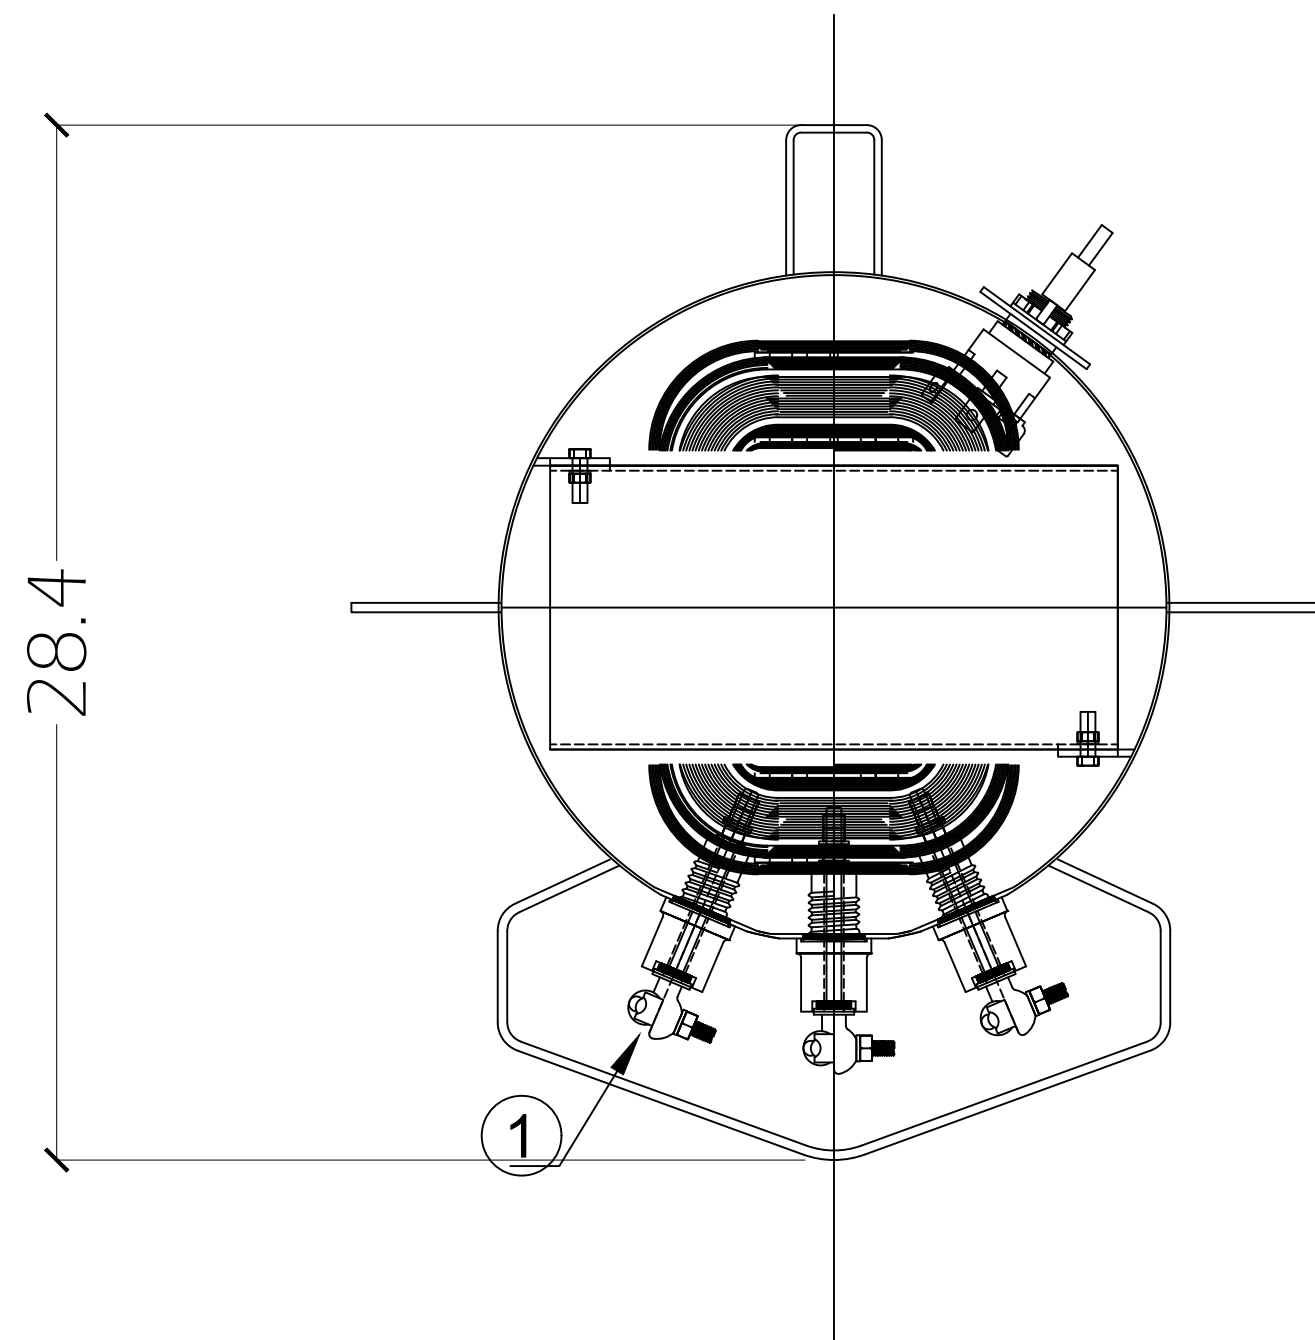



NO.	CANT.	DESCRIPTION
1	3	LOW VOLTAGE BUSHING
2	2	HIGH VOLTAGE BUSHING
3	1	TAPS CHANGER
4	1	OVER PRESSURE RELIEF VALVE
5	1	DATA PLATE
6	2	TYPE GROUND CONNECTOR
7	1	UPPERFILTER PRESS CONNECTION
8	2	LIFT HOOKS
9	1	DRAIN AND SAMPLING VALVE
10	2	HANGING BRACKET TYPE A
11	2	POLYMERIC LIGHTNING ARRESTER

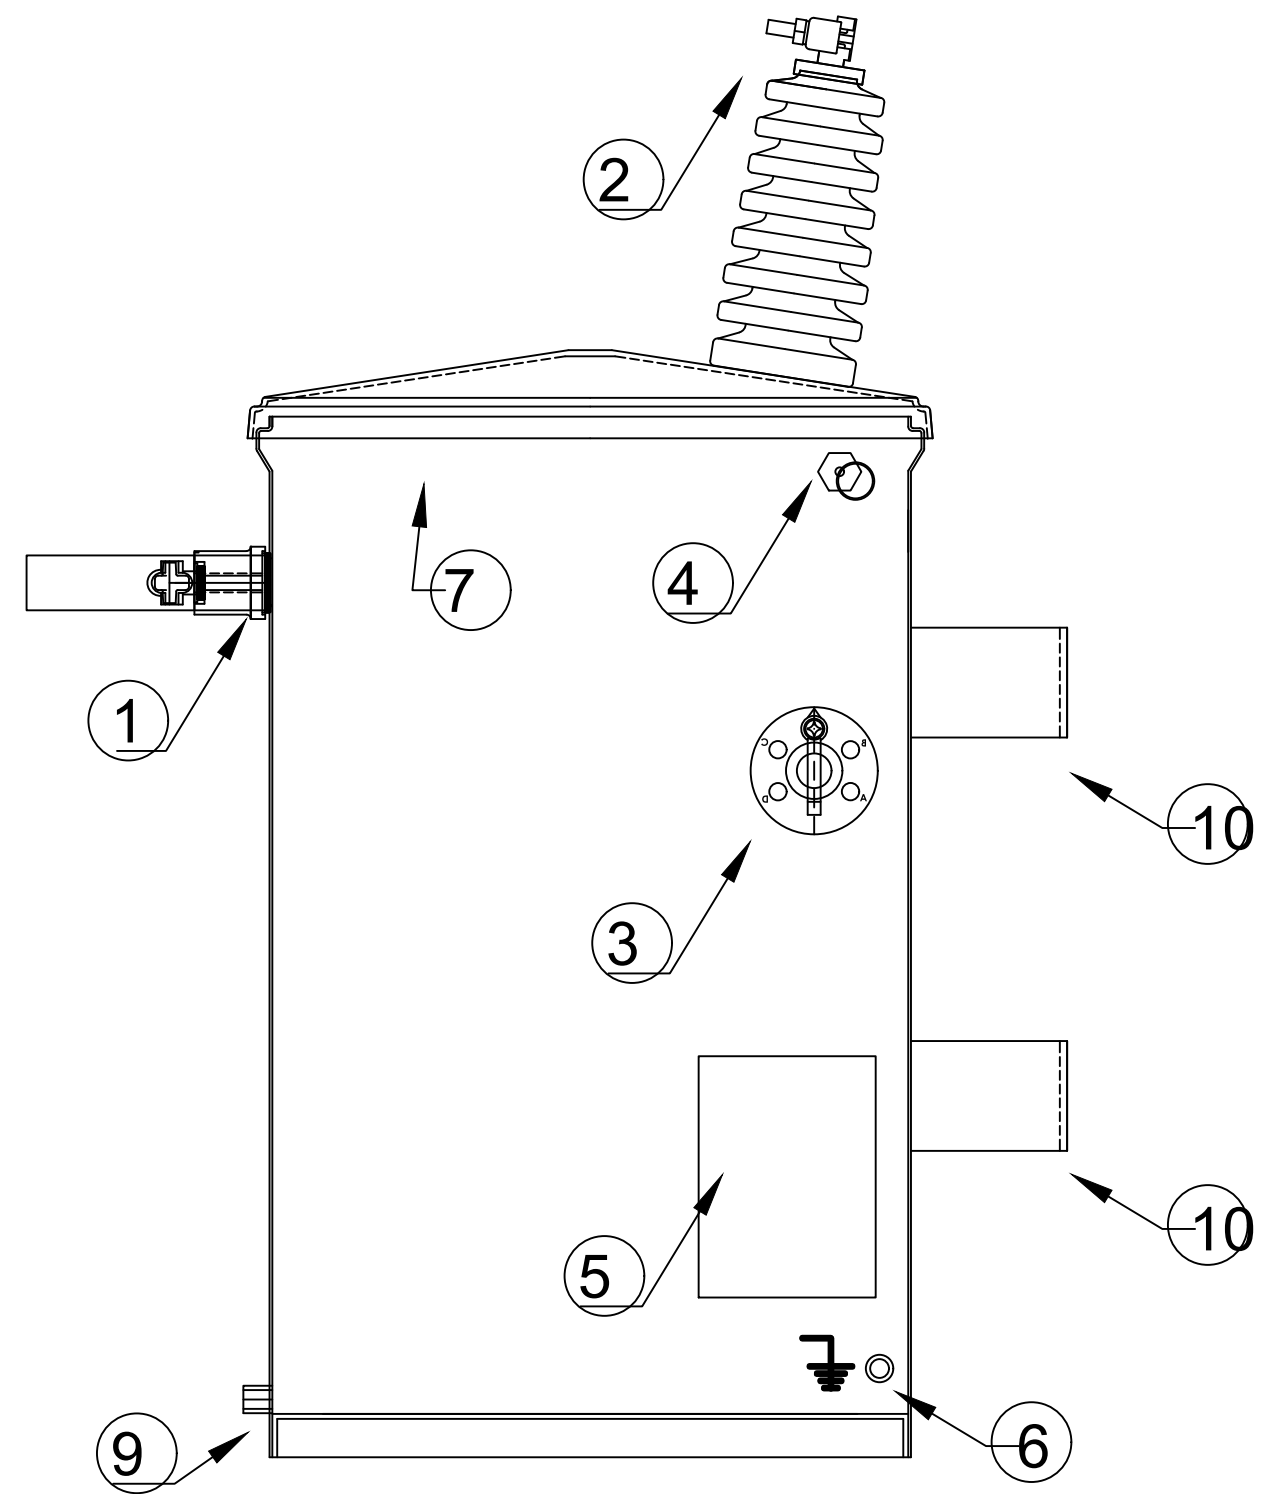


11 POLYMERIC LIGHTNING ARRESTER
OPTIONAL ACCESSORY

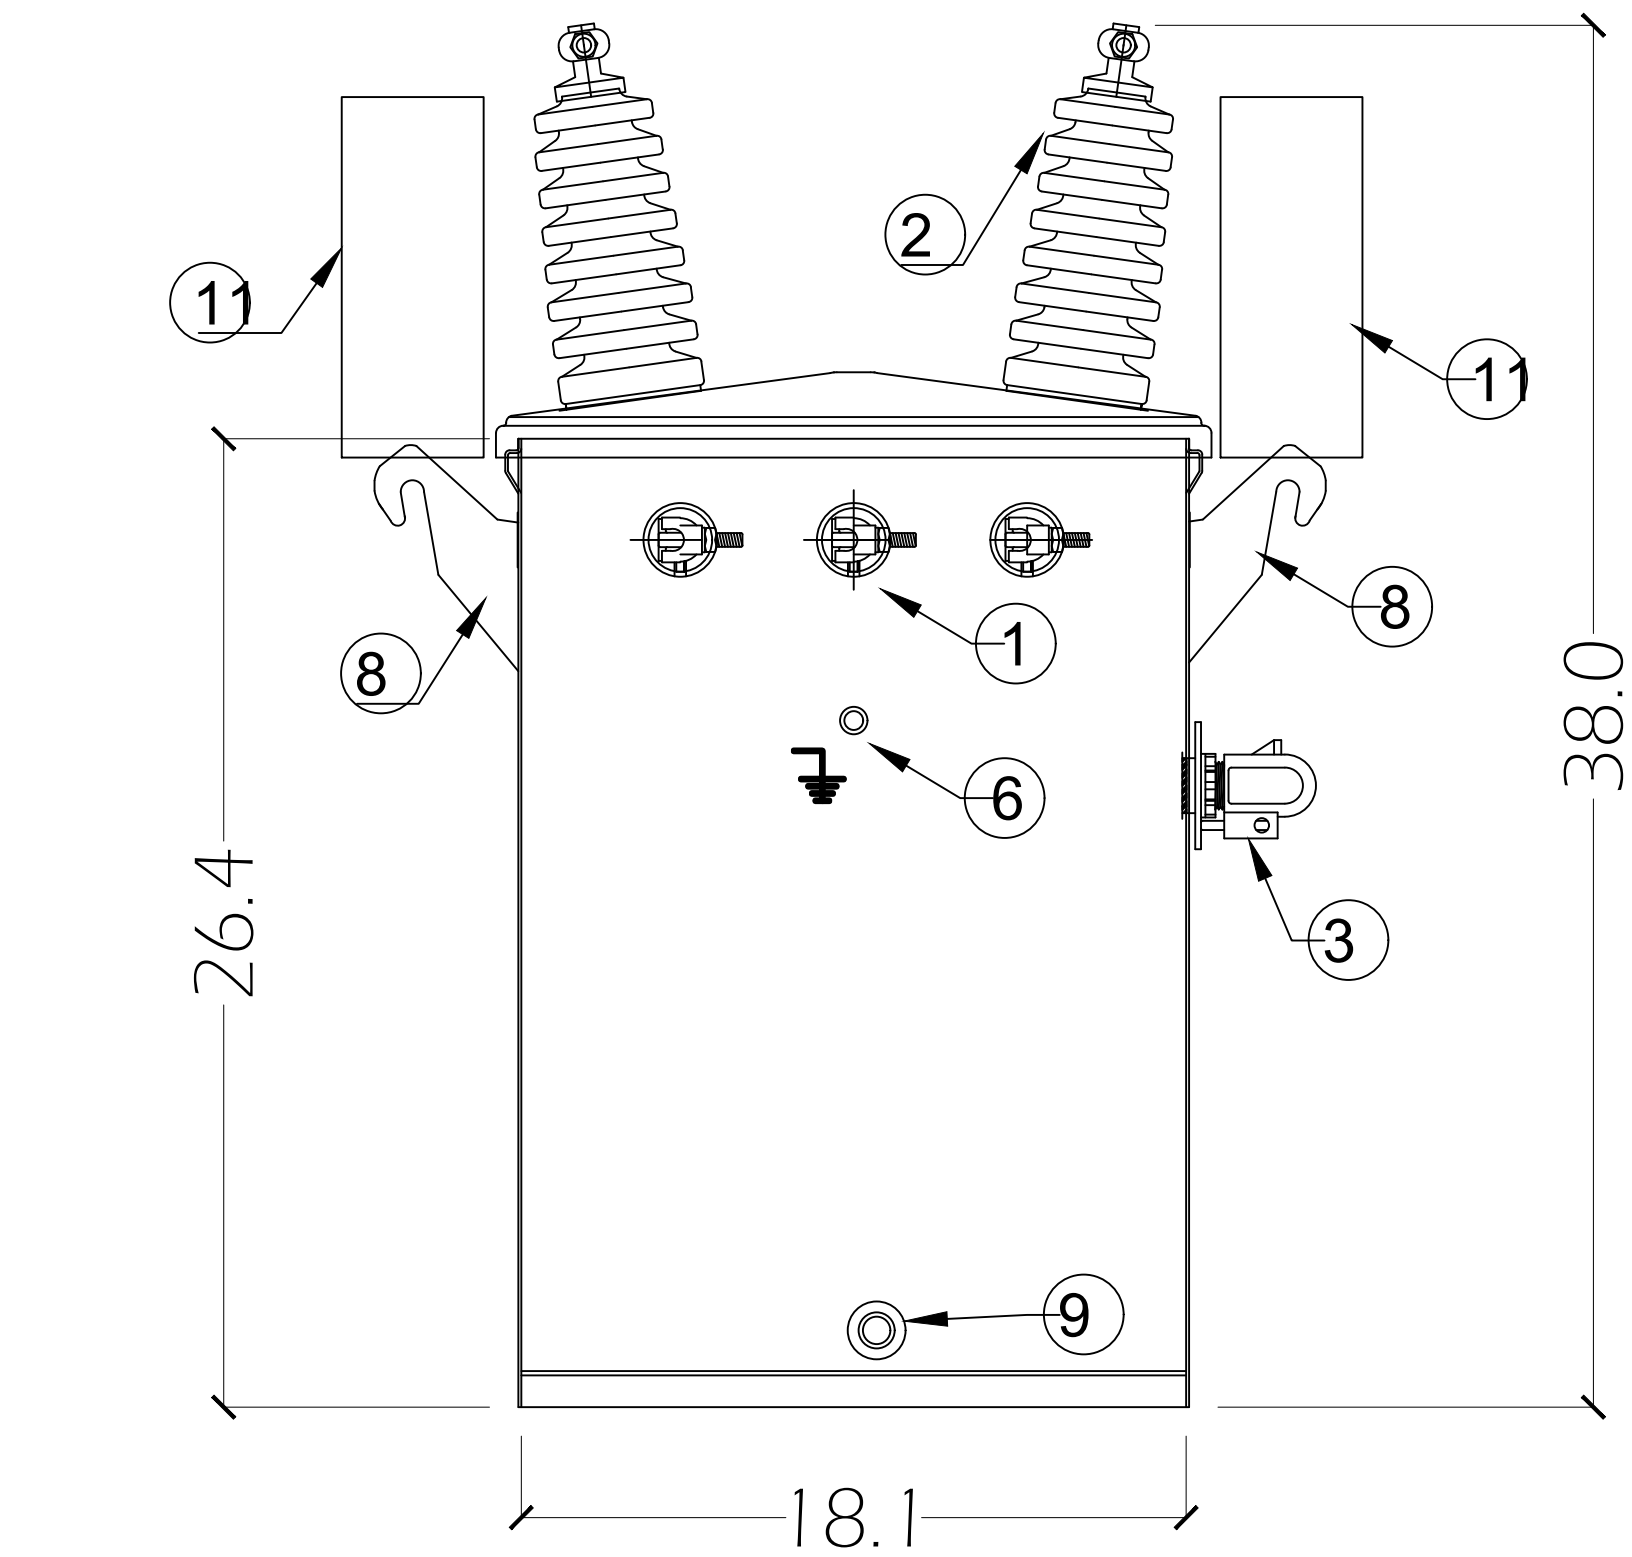

HIGH VOLTAGE

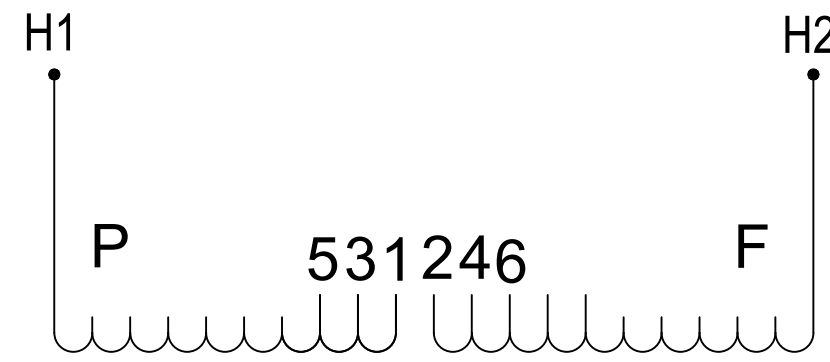

LOW VOLTAGE

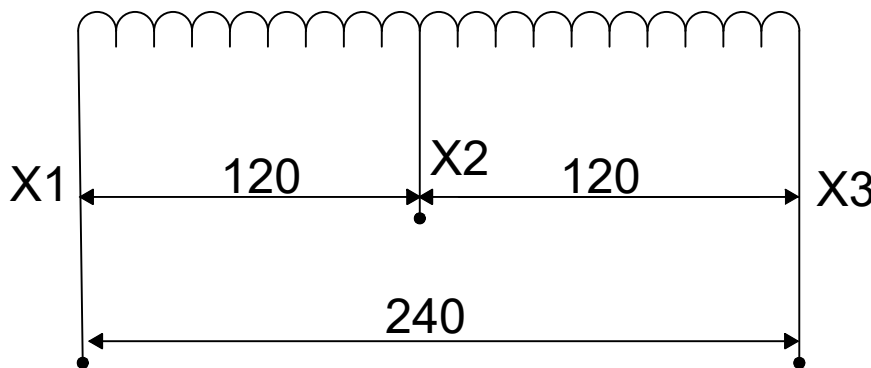

POLARITY: SUBTRACTIVE

GREY COLOR		
ELECTRICAL PARAMETERS		
NO- LOAD LOSSES	105	WATTS
LOAD LOSSES	189	WATTS
TOTAL LOSSES	294	WATTS
IMPEDANCE	1.75	%
EFFICIENCY	98.85	%
EXIT CURRENT	0.68	%

APPROXIMATE MASSES	LBS
CORE AND COILS	175
TANK AND ACCESORIES	88
TOTAL	380



GENERAL DIMMENSIONS

POLE MOUNT - TYPE SINGLE PHASE DISTRIBUTION TRANSFORMER

37.5 kVA 13200 120/240 VOLTS

TYPE: ONAN CONNECTION TWO PHASES TAPS: + 2 - 2 OF 2.5 %

REVISION NO.	
DRAWING	SCALE N/A
REVISED	DIMENSIONS INCHES
APROVE	DATE
DRAWING NO.	