

Outdoor KEENHYZHP27AA

Multi Zone Heat Pump System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



EFFICIENCY			
Cooling		Heating	
SEER2	23.0	HSPF2-4	10.5
EER2	12.5	COP	3.8

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	27000
Min/Max Capacity	7200 ~ 37000
Moisture Removal (L/h)	0.8
Standard Operating Range (*F/*C)	-22 ~ 122 / (-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB


PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	27000
1. @ 47°F Min/Max Capacity	8400 ~ 36000
2. @ 17°F Rated (H32)	25000
3. @ 5°F Rated: Capacity / COP (H42)	27000 / 2
3. @ 5°F Max: Capacity	27000
Standard Operating Range (*F/*C)	-22 ~ 75 / (-30~24)
1. Conditions:	Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB
2. Conditions:	Indoor: 70°F DB / 60°F WB Outdoor: 17°F DB / 15°F WB
3. Conditions:	Indoor: 70°F DB / 60°F WB Outdoor: 5°F DB / 5°F WB

OUTDOOR SPECIFICATION		
Compressor Type	ROTARY	
Compressor Model	KTF310D43UMT	
Refrigerant	R454B	
Refrigerant Oil Charge (mL)	1000	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	2148	
Outdoor Noise Level (dBA)	61	
Dimension (WxDxH)	inch	37.24 x 16.14 x 31.89
	mm	946 x 410 x 810
Package (WxDxH)	inch	42.91 x 19.68 x 34.84
	mm	1090 x 500 x 885
Net/Gross Weight	lbs	168.43 / 179.67
	kg	76.4 / 81.5


ELECTRICAL	
Power Supply	208/230V, 60Hz, 1Ph
System MCA	30
Connection Wiring	AWG 14-4
System MOCP	35
Compressor RLA	17
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	2125 / (500 ~ 3620)
System Power Input @ Heating (W)	2082 / (500 ~ 3400)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Liquid Size	4 x 6.35mm (4 x 1/4in)
Gas Size	3 x 9.52mm + 1 x 12.7mm (3 x 3/8in + 1 x 1/2in)
Max. Piping Length for all rooms (ft/m)	262.4 / (80)
Max. Piping Length for one IDU (ft/m)	114.8 / (35)
Max. Height Difference of IDU and ODU (ft/m)	49.2 / (15)
Refrigerant Pre-charged Amount (oz/kg)	120.63 / (3.42)
Refrigerant Precharge Length (ft/m)	24.6 (7.5) x 4
Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft) / (g/m))	0.16 / (15)
Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft) / (g/m))	0.32 (30)
Connection Method	Flared

Outdoor Unit Dimension

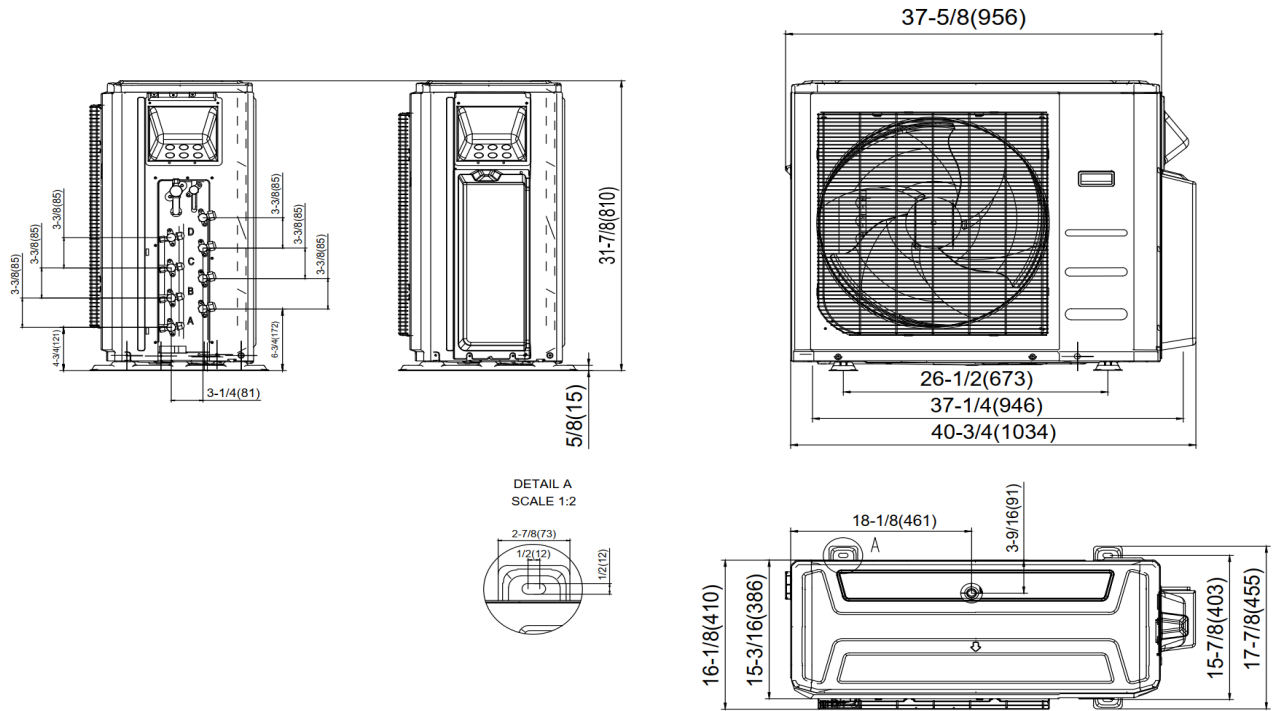

Installation Instruction

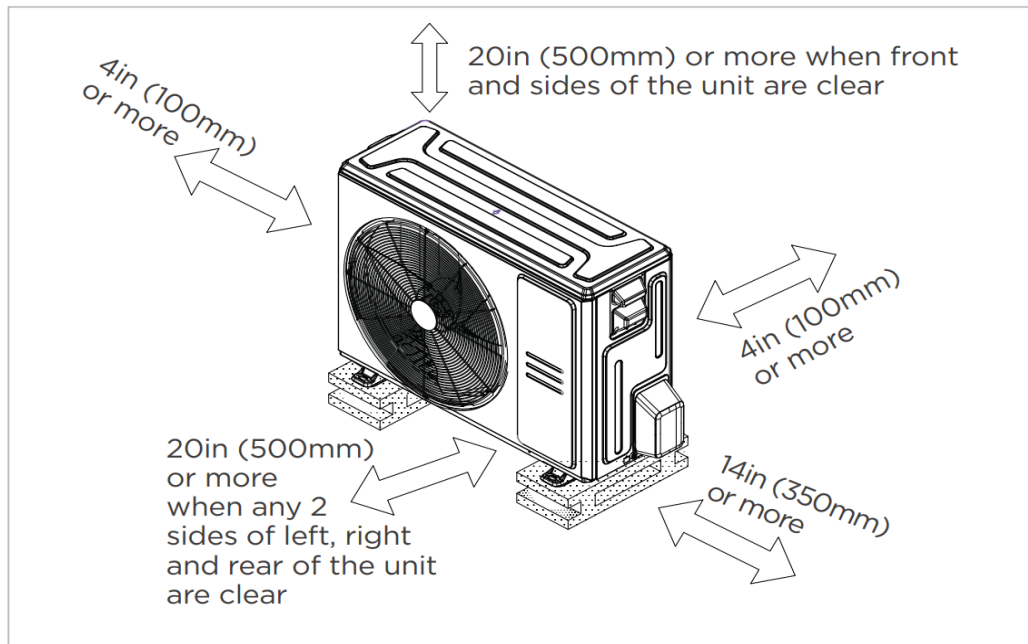

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.