

Indoor KEENSTPAH18AA

Outdoor KEENHYDHP18AA

Air Handler Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION	
ESP (in WG)	0 - 0.8
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	600 / 565 / 530 / 489 / 489
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	55.5 / 55.5 / 52.5 / 50.5 / 50.5
Dimension (WxDxH)	inch 43.23 x 23.33 x 10.93
	mm 1098 x 592.7 x 277.6
Package (WxDxH)	inch 47.24 x 680 x 13.58
	mm 1200 x 680 x 345
Net/Gross Weight	lbs 118 / 127.87
	kg 53.5 / 58

OUTDOOR SPECIFICATION	
Compressor Type	ROTARY
Compressor Model	KTM240D46UKT2
Refrigerant	R454B
Refrigerant Oil Charge (mL)	620
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	1,766
Outdoor Noise Level (dBA)	59
Dimension (WxDxH)	inch 35.04 x 13.46 x 26.5
	mm 890 x 342 x 673
Package (WxDxH)	inch 39.17 x 15.67 x 29.13
	mm 995 x 398 x 740
Net/Gross Weight	lbs 101.41 / 109.13
	kg 46 / 49.5


EFFICIENCY			
Cooling		Heating	
SEER2	16.8	HSPF2-4	10.5
EER2	12	COP	3.50

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	18,000
Min/Max Capacity	6,000 ~ 20,000
Moisture Removal (L/h)	1.46
Standard Operating Range (°F/°C)	-22 ~ 122 (-30 ~ 50)
Rated Cooling Conditions:	Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	19,000
1. @ 47°F Min/Max Capacity	6,600 ~ 22,800
2. @ 17°F Rated	15,000
3. @ 5°F Rated: Capacity / COP	19,000 / 1.8
3. @ 5°F Max: Capacity	19,000
Standard Operating Range (°F/°C)	-22 ~ 75 (-30 ~ 24)
1. Rated Heating Conditions:	Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB / 60°F WB Outdoor: 17°F DB / 15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB / 60°F WB Outdoor: 5°F DB / 5°F WB


ELECTRICAL	
Indoor Power Supply	115/208/230, 60Hz, 1Ph
Indoor MCA 115V / (208/230V)	115V:6; 208/230V:5
Indoor MOP	15
Outdoor Power Supply	208/230, 60Hz, 1Ph
Outdoor MCA	16
Outdoor MOP	20
Communication Wiring	AWG 20/2
Compressor RLA	10.5
Outdoor Fan Motor RLA	0.9
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	115V:4; 208/230V:3.5
Indoor Fan Motor W	250
System Power Input @ Cooling (W)	2 (600 ~ 2,000)
System Power Input @ Heating (W)	1,590 (500 ~ 1,950)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Throttle Type (Indoor)	EXV
Throttle Type (Outdoor)	EXV
Liquid Size	9.52mm (3/8in)
Gas Size	19mm (3/4in)
Max. Piping Length (ft/m)	98 (30)
Max. Height Difference (ft/m)	66 (20)
Max. Pre-charged Length (ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount (oz/kg)	74.08 (2.1)
Additional Charge of Refrigerant ((oz/ft) / (g/m))	0.7 (65)
Connection Method	Flared

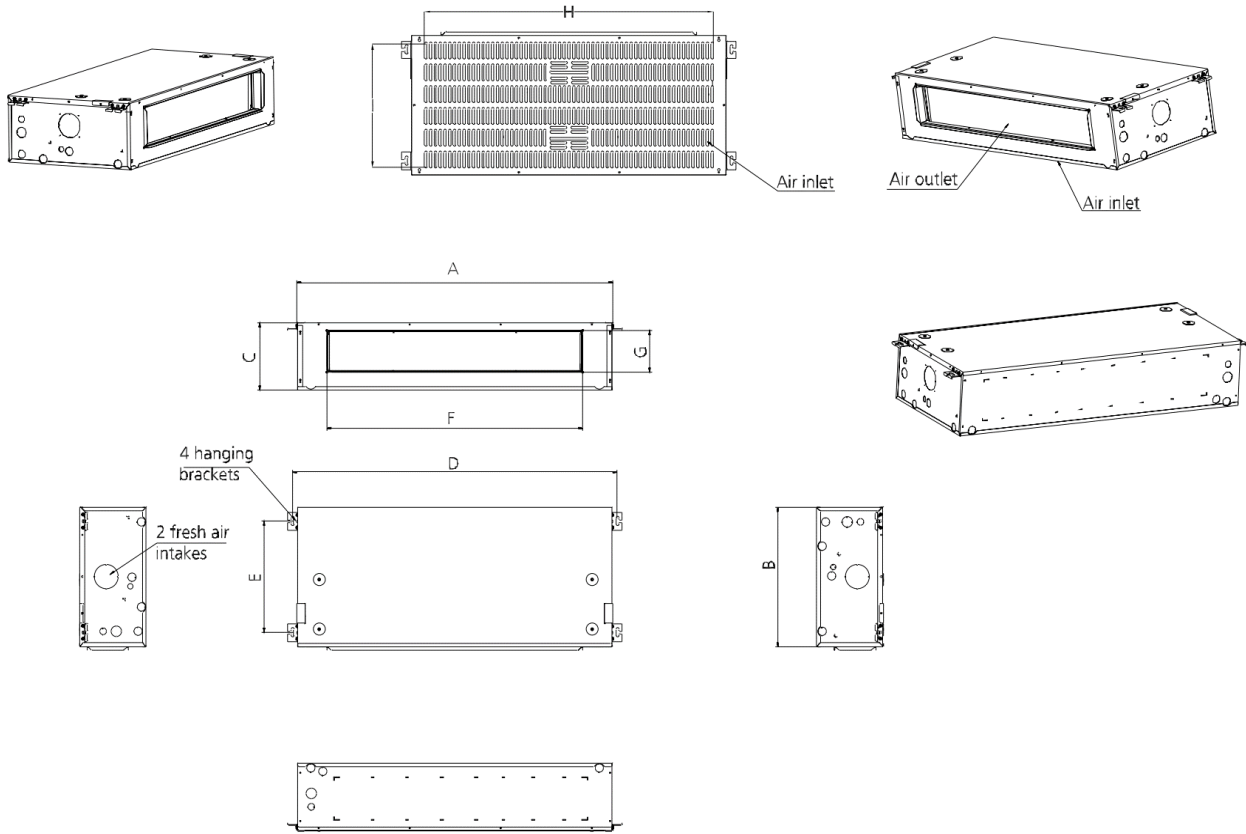


Dimensions		Model	18k	24k	30k/	36k
			inch(mm)	inch(mm)	inch(mm)	inch(mm)
Outline Dimension	A	Model Model	39-15/16 (1015)	45-7/8 (1165)	51-15/16 (1320)	58-7/8 (1495)
	B	Model Width	23-5/16 (593)	23-5/16 (593)	23-5/16 (593)	23-5/16 (593)
	C	Model Height	10-15/16 (278)	10-15/16 (278)	10-15/16 (278)	10-15/16 (278)
Size Of Mounted Lug	D	Mounted Lug Length	41-5/8 (1057)	47-1/2 (1207)	53-5/8 (1362)	60-1/2 (1537)
	E	Mounted Lug Width	18-1/8 (460)	18-1/8 (460)	18-1/8 (460)	18-1/8 (460)
Air Outlet Opening Size	F	Air Outlet Length	30-5/16 (769)	36-3/16 (919)	42-5/16 (1074)	49-3/16 (1249)
	G	Air Outlet Width	6-7/8 (174)	6-7/8 (174)	6-7/8 (174)	6-7/8 (174)
Air Return Opening Size	H	Air Return Length	38-3/8 (975)	44-5/16 (1125)	50-3/8 (1280)	57-1/4 (1455)
	I	Air Return Width	21-1/8 (536)	21-1/8 (536)	21-1/8 (536)	21-1/8 (536)

Outdoor Unit Dimension

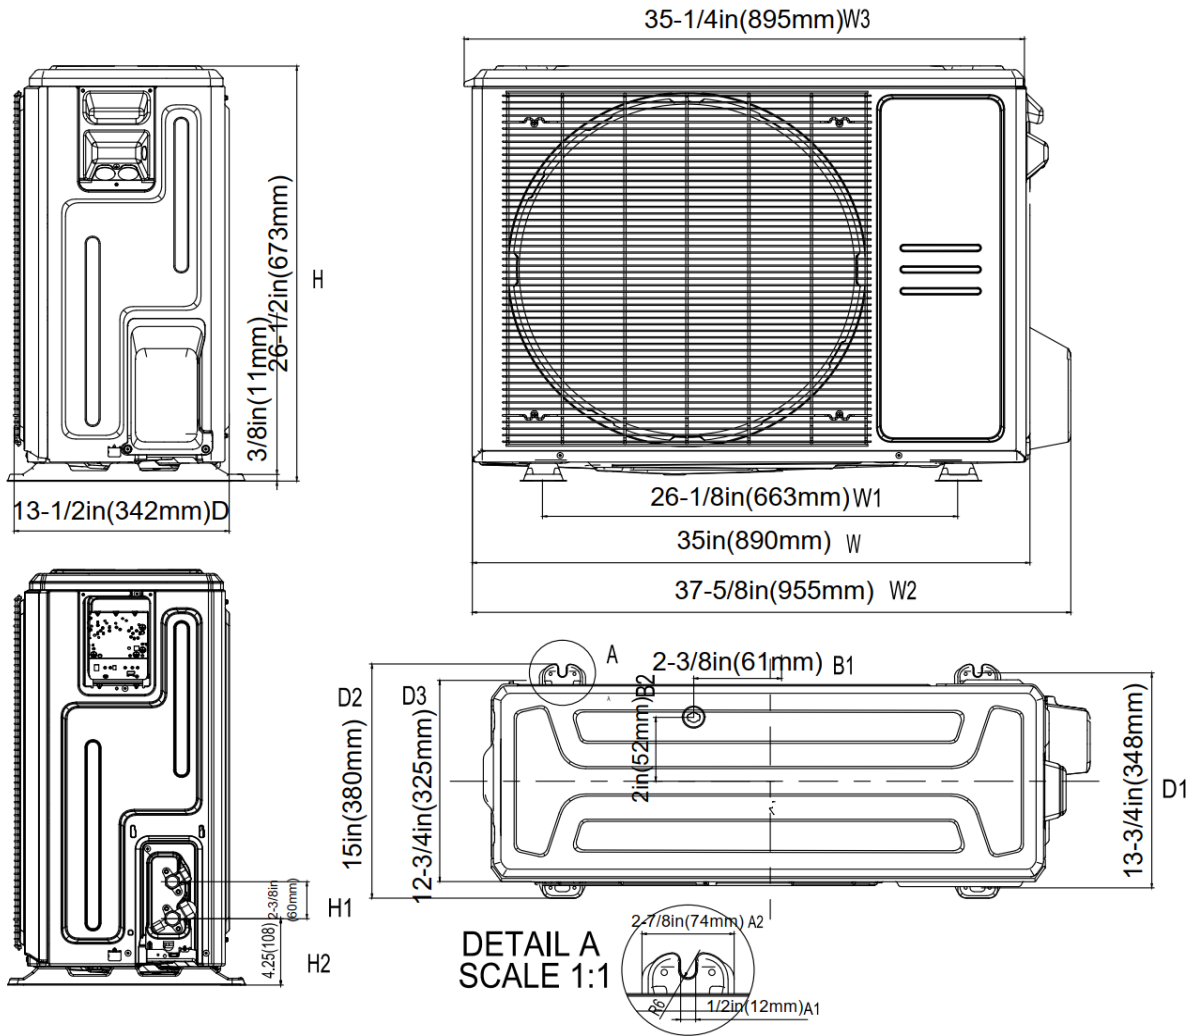


Installation Instruction For Outdoor Unit

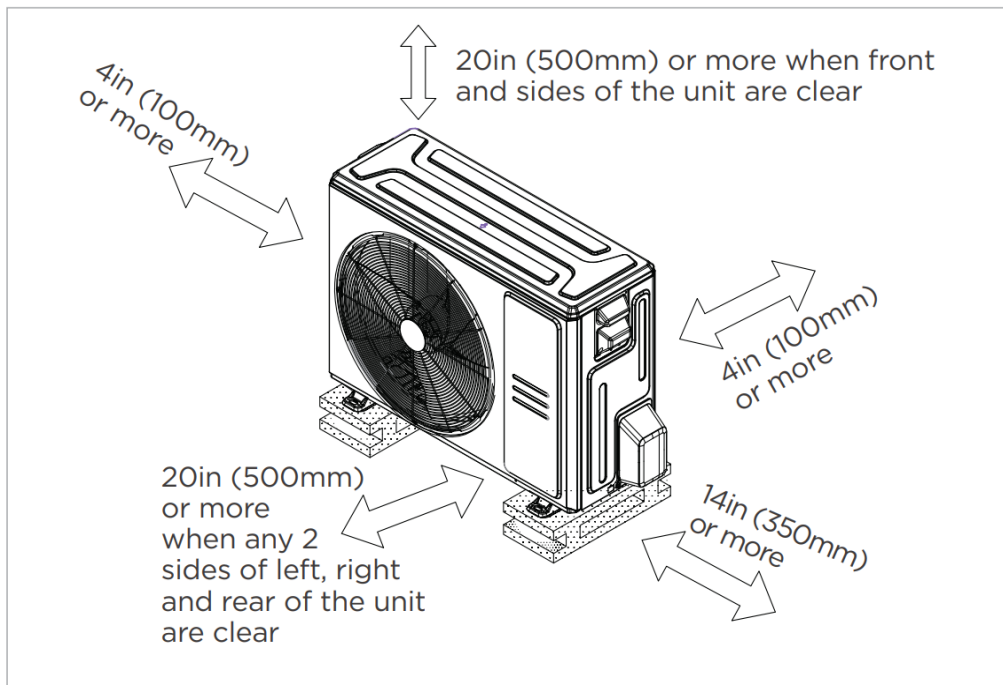

Meets all spatial requirements shown in Installation Clearance Requirements above.

18K

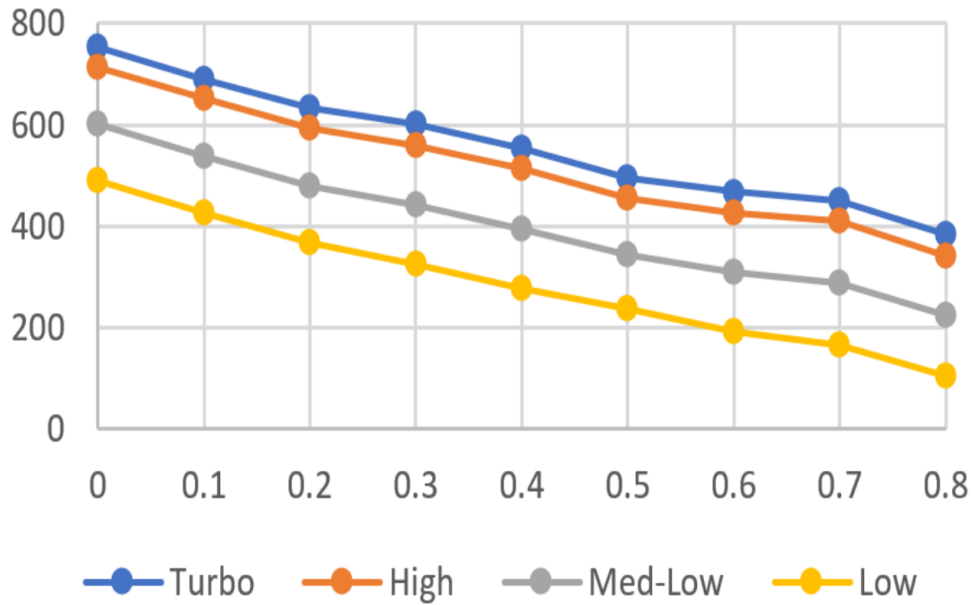

Features

- High efficiency up to 16.8 SEER2, 12 EER2, 10.5 HSPF2
- Aluminum Coil
- IDU compatible with 115V and 230V
- Constantly Air Flow system up to 0.80 In.W.G
- Optional Auxiliary heat kit up to 10kW
- Easy Maintenance
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Wireless remote controller
 - Third-Party 24V Thermostat
- Adaptive Control wiring method on 24V and RS485
- Downward or Backward (optional) air inlet
- Chassis heater and crankcase heater equipped as standard