

NXF-742E

10/100 RJ45 to 100FX Converter

Description

The NXF-742E Fast Ethernet Media Converter is specifically designed for medium and large workgroups which demand extended reach, and engineered to offer a solution for networks that are ready to expand or migrate from copper-based to Fiber-based networks. Along with the capability of converting media transmissions, the NXF-742E features enhanced functions like local and remote Loopback, Auto MDI/MDIX, LFS (Link Fault Signalling), LEDs, DIP switches etc to provide high reliability, easy plug-and-play, continuous monitoring and thereby minimize downtime for mission-critical networks.

Featuring an RJ45 port and a fiber port, the NXF-742E converts 10/100Base-TX network to 100Base-FX fiber network or vice versa by easily integrating copper with fiber and allowing them to operate smoothly. This gives the utmost flexibility in installing various connections over fiber and extend the reach of Fast Ethernet connectivity over single-mode or multi-mode fiber. The NXF-742E offers you the most economic and cost-effective solution to meet your need for long distance transmissions up to 100km and provide a gradual migration path from existing copper-based network to Fiber-based network.



RoHS
CE FCC



Features Highlight

Versatile and Reliable Technology

Network administrators can now flexibly monitor and diagnose issues associated with device or network functionality and link activity using the NXF-742E enhanced features. With Loopback function, the converter allows administrators to perform network diagnostics from local or remote location and quickly pinpoints problem areas of links by testing a particular segment. LFS (Link Fault Signalling) feature on the device provides critical information about link status and enables you to easily detect optical signal strengths and faulty links on copper and fiber ports, and significantly minimizes outage.

Economic and Space-saving Design

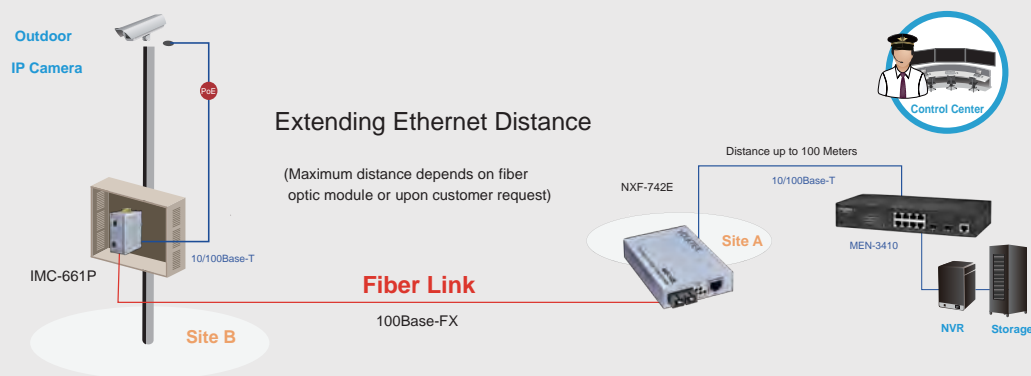
Responding to the issues of design in mission-critical environments, the NXF-742E is designed in a space-saving, compact and slim housing. This standalone low-cost media converter provides transparent conversion at 100Mbps without data stream interference and inexpensively connects both 10/100Mbps copper port and 100Mbps Fiber port in a small enclosure. Compact in size, the media converter easily fits in smaller infrastructures that have little space available. The NXF-742E is extremely simple to install and operate, and thus saves your valuable time and money.

Easy Plug-and-play Operation

Being a compact, lightweight media converter, the NXF-742E is an easy-to-setup and ready-to-use solution for dispersed or emerging networks. Featuring Auto-MDI/MDIX and Auto-negotiation, the media converter automatically detects and configures the best mode of operation over a link. This eliminates the need of user setup or configuration procedure and simplifies installation. And once installed the media converter operates automatically. In addition, the DIP switches on the NXF-742E provides a simplest and quickest way to enable or disable various functions on the device.






Applications

Fiber-Optic Link Capability Enables Extension of Network Deployment



* The diagram illustrates a typical application for the NXF-742E media converter. The actual distances will depend on several factors, including the quality of cables used and the terminal equipment employed.

Specifications

Features					
DIP Functions	1: Link Fault Signal				
	2: LLB (Local Loopback)				
	3: RLB(Remote Loopback)				
Standards					
IEEE 802.3	10BASE-T				
IEEE 802.3u	100BASE-TX/FX				
Interface					
Ports	1 x 10/100BASE-T (RJ45)				
	1 x 100BASE-TX/FX				
LED Panel	PWR, LNK/ACT, 100				
Fiber Optics					
Model Name	NXF-742E-MT	NXF-742E-MC	NXF-742E-SC	NXF-742E-TS	NXF-742E-RS
Connector Type					
	ST	SC	SC	TX	RX
Interface Type	100Base-FX	100Base-FX	100Base-FX	100Base-FX	100Base-FX
Fiber Mode	Multi-Mode	Multi-Mode	Single-Mode	Single-Mode	Single-Mode
Distance	Up to 2km	Up to 2km	Up to 100km	Up to 40km	Up to 40km
	(Upon customer request)				
Features					
Performance	Packet buffer size: 512Kbits				
	Jumbo Frame size: 16KB				
Power					
Power Input	12VDC/1A, via external power adapter				
Power Consumption	1.8W				
Connector Type	DC Jack				
Mechanical and Environment					
Housing	Aluminum (IP30 Protection)				
Mounting	Wall-Mount, DIN-Rail (Optional)				
Operating Temperature	0°C~50°C (32°F~122°F)				
Storage Temperature	-25°C~70°C (-13°F~158°F)				
Operating Humidity	10 to 95% RH (non-condensing)				
Storage Humidity	5 to 95% RH (non-condensing)				
Weight	138 g (0.3 lb)				
Dimension (WxHxD)	73.8 x 109.2 x 23.4 mm (2.91 x 4.3 x 0.92 in)				

*Specifications subject to change without notice.

Standards and Certifications

EMI	FCC Part 15 of Class A & CE Approved
	EN55032 Class A
	EN 61000-3-2
	EN 61000-3-3
EMS	EN 55024
	IEC/EN 61000-4-2 (ESD)
	IEC/EN 61000-4-3 (RS)
	IEC/EN 61000-4-4 (EFT)
	IEC/EN 61000-4-5 (Surge)
	IEC/EN 61000-4-6 (CS)
	IEC/EN 61000-4-8 (PFMF)
	IEC/EN 61000-4-11

Ordering Information

NXF-742E-MT	10/100BASE-TX to 100BASE-FX (ST) Multi-mode 2km Media Converter
NXF-742E-MC	10/100BASE-TX to 100BASE-FX (SC) Multi-mode 2km Media Converter
NXF-742E-SC	10/100BASE-TX to 100BASE-FX (SC) Single mode 30km Media Converter
NXF-742E-SC40	10/100BASE-TX to 100BASE-FX (SC) Single mode 40km Media Converter
NXF-742E-SC60	10/100BASE-TX to 100BASE-FX (SC) Single mode 60km Media Converter
NXF-742E-SC100	10/100BASE-TX to 100BASE-FX (SC) Single mode 100km Media Converter
NXF-742E-TS20	10/100BASE-TX to 100BASE-FX Single FiberMedia Converter, 20km TX 1310nm/RX 1550nm Transmitter
NXF-742E-TS40	10/100BASE-TX to 100BASE-FX Single Fiber Media Converter, 40km TX 1310nm/RX 1550nm Transmitter
NXF-742E-RS20	10/100BASE-TX to 100BASE-FX Single Fiber Media Converter, 20km TX 1550nm/RX 1310nm Receiver
NXF-742E-RS40	10/100BASE-TX to 100BASE-FX Single Fiber Media Converter, 40km X 1550nm/RX 1310nm Receiver

Dimension

