

# CBS-10K

## 10 kW PEAK SINGLE OUTPUT DC/DC CONVERTER

### GENERAL FEATURES:

High input-output isolation 5000 V<sub>rms</sub>  
 Remote off opto-coupled  
 Alarm by isolated relay contacts  
 Remote control via RS232  
 CAN BUS (optional)  
 Redundant configuration  
 Railway version EN50155  
 Fire and smoke: EN45545-2 approved  
 Up to 10 kW during 40 s  
 O-ring output diode up to 2000V



		Input			
		24 V <sub>dc</sub> 16.8 ... 30 V	48 V <sub>dc</sub> 33.6 ... 60 V	72 V <sub>dc</sub> 50.4 ... 90 V	110 V <sub>dc</sub> 77 ... 138 V
Output	500 V <sub>dc</sub>	<b>CBS-10K-6001</b> 5200 W <sub>pk</sub>	<b>CBS-10K-6003</b> 10000 W <sub>pk</sub>	<b>CBS-10K-6004</b> 10000 W <sub>pk</sub>	<b>CBS-10K-6005</b> 10000 W <sub>pk</sub>

Several references are subjected to special MOQs and lead times. Please consult Premium's Sales Dept. and web site.



## INPUT

Input voltage range	-30, +25 % Vin nom
Maximum input ripple	5 % Vin nom (V <sub>rms</sub> , 100 Hz)

## OUTPUT

Nominal output voltage (Von)	See table
Output voltage range	< 1%
Load regulation	< 1 %
Line regulation	< 0.2 %
Maximum Iopk time	40 s
Maximum continuous power	6 kW
Peak power	10 kW
Ripple	< 1 V <sub>pp</sub>
Ripple + noise (BW 20 MHz)	< 5 V <sub>pp</sub>

## ENVIRONMENTAL

Storage temperature	-40 ... 80 °C
Operating temperature: Full load	-25 ... 55 °C (EN50155 OT1)
Operating temperature: 62.5 % load	-25 ... 70 °C (EN50155 OT3)
Relative humidity without condensation	5 ... 95 %
Cooling	Internal controlled fan
Maximum altitude	2000m at full load, 2500m at 90% of load
MTBF (According to IEC61709, SN29500 @40°C)	200.000 h

## EMC

Immunity according	EN61000-6-2:2005, EN50121-3-2:2016
Emissions according	EN61000-6-4:2007, EN50121-3-2:2016

## SAFETY

Dielectric strength: Input /output	5000 V <sub>rms</sub> / 50 Hz / 1 min
Dielectric strength: Output / Earth	5000 V <sub>rms</sub> / 50 Hz / 1 min
Dielectric strength: Input / Earth	1500 V <sub>rms</sub> / 50 Hz / 1 min
Safety according to	EN62368-1:2014
Fire and smoke	EN45545-2:2013

## MECHANICAL

Weight	< 7 kg
Shock and Vibrations according to	EN61373:2011 Category 1 Class B
Protection degree	IP20

## PROTECTIONS

Against overloads	Current and I <sup>2</sup> t limited with auto-recovery
Against over-temperature	Shutdown with auto-recovery

## CONTROL

Output OK LED	Red
Input OK LED	Green
Input alarm	Open when alarm Alarm when Vin is out of input voltage range Closed < 30 Ω. Maximum rating: 0.13 A at 160 V <sub>dc</sub>
Output alarm	Open when alarm Alarm when Vout is out of ±10% Closed < 30 Ω. Maximum rating: 0.13 A at 160 V <sub>dc</sub>
Remote OFF input	Off applying 15...143 V <sub>dc</sub> , Impedance >24 kΩ
Communications	Port RS-232 or CAN BUS



## ORDERING CODES


Model	Input				Output					Efficiency
	Voltage		Current		Voltage	Max power		Max current		
	Nom	range	No load	Max	Nom	Average	Peak	RMS	Iopk 40s	
	[V]	[V]	[A]	[A]	[V]	[kW]	[kW]	[A]	[A]	
CBS-10K-6001	24	16.8 - 30	< 1.1	320	500	3.5	5.2	7.0	10.2	> 93
CBS-10K-6003	48	33.6 - 60	< 0.55	310	500	6.0	10	12	20	> 94
CBS-10K-6004	72	50.4 - 90	< 0.34	209	500	6.0	10	12	20	> 95
CBS-10K-6005	110	77 - 138	< 0.22	137	500	6.0	10	12	20	> 95.5

Several references are subjected to special MOQs and lead times. Please consult Premium's Sales Dept. and web site.


Accessories must be ordered in a separate order line.



## BLOCKS DIAGRAM

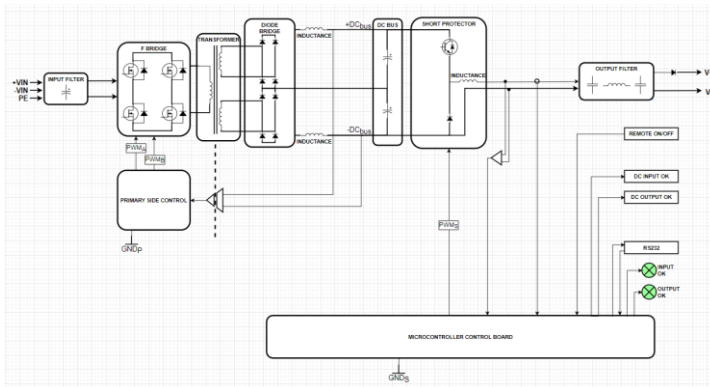

## CONNECTIONS

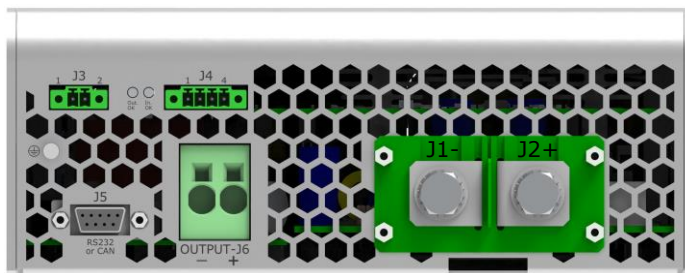

J1	-Vin	Terminal M8 (Rec. torque 5 Nm)
J2	+Vin	
J3 - 1	+ Remote	Phoenix Contact MC1.5/2-GF-3.81 Recommended female: Phoenix Contact MC1.5/2-STF-3.81
J3 - 2	- Remote	
J4 - 1	Status output	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J4 - 2	Status output	
J4 - 3	Status input	
J4 - 4	Status input	
J5 - 2	RS232 RX	Female D-Sub DB9
J5 - 3	RS232 TX	
J5 - 5	RS232 GND	
J5 - 2	CAN L (option Can bus)	
J5 - 7	CAN H (option Can bus)	
J5 - 3	CAN GND (option Can bus)	Cables 2.5 ... 4 mm <sup>2</sup>
J6 - 1	- Vout	
J6 - 2	+Vout	

## DESCRIPTION

The CBS-10K series consists of DC/DC converters, with a galvanic isolation between input and output, operating at fixed switching frequency.

The unit can deliver up to 6 kW average and up to 10 kW during 40s (see data table) being protected against overload and short-circuits.

The unit includes an ORing diode at the output to decouple it from lines up to 2 kV

## START-UP

- The unit has 6 threaded M4 holes for the fixation on a mounting surface (maximum deep 5 mm)
- The unit has internal fans. For an appropriate cooling, the air input and output should be free of elements that cause an air flow reduction (minimum recommended distance to other objects 90mm).
- For safety reasons, the following requirements must be met:**
- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Include an external input overcurrent protection (fuse or breaker) with a rating immediately higher than the maximum input current.
- Use cables of adequate cross-section to connect inputs and outputs. The following table lists the maximum currents and the minimum cross-sections for the cables used for each power connection.

	Input 24 V	Input 48 V	Input 72 V	Input 110 V	Output 500 V
Maximum current	320 A	310 A	209 A	137 A	10 A
Cable cross-section	<b>95</b> mm <sup>2</sup>	<b>95</b> mm <sup>2</sup>	<b>50</b> mm <sup>2</sup>	<b>25</b> mm <sup>2</sup>	<b>2.5 - 4</b> mm <sup>2</sup>



## RS232 communication port

It is possible to control and monitor the unit via RS232 by means of an application tool named PAM. This application is free and can be downloaded from the Premium website.

Also it is possible to control and monitor the unit directly using the protocol showed in table:


**Protocol configuration:** ASCII code, 9600 bauds, parity none, 8 bits, 1bit stop

Header	Function	Parameter	Returns	Explanation
P	R	V	PTV####	Input voltage in Volts
		v	PTv####	Input voltage ripple in Volts
		U	PTU####	Output voltage in Volts
		I	PTI####	Output current in Amps
		T	PTT####	Internal temperature 1 in K
		t	PTt####	Internal temperature 2 in K
		S	PTS####	Inverter state 999.9 → Enabled 000.0 → Disabled 222.2 → Blocked by overload 111.1 → Blocked by overload or shortcircuit
		M	PTM####	Model number
		R	PTR####	Firmware version
		Other	PTE	Command not supported
	G	1	####	Set the low input voltage timed shutdown in V
		2	####	Set the minimum alarm input voltage in V
		3	####	Change the status bit 999.9 → Converter enabled 000.0 → Converter disabled
		5	####	Set the maximum output current in Arms $20\% I_{nom} \leq \text{####} \leq 100\% I_{nom}$
		7	####	Set the alarm maximum output current $0 < \text{####} \leq 100\% I_{max\_warning}$
		8	####	111.1 → Reset the converter

OTHER PORTS PENDING




DIMENSIONS

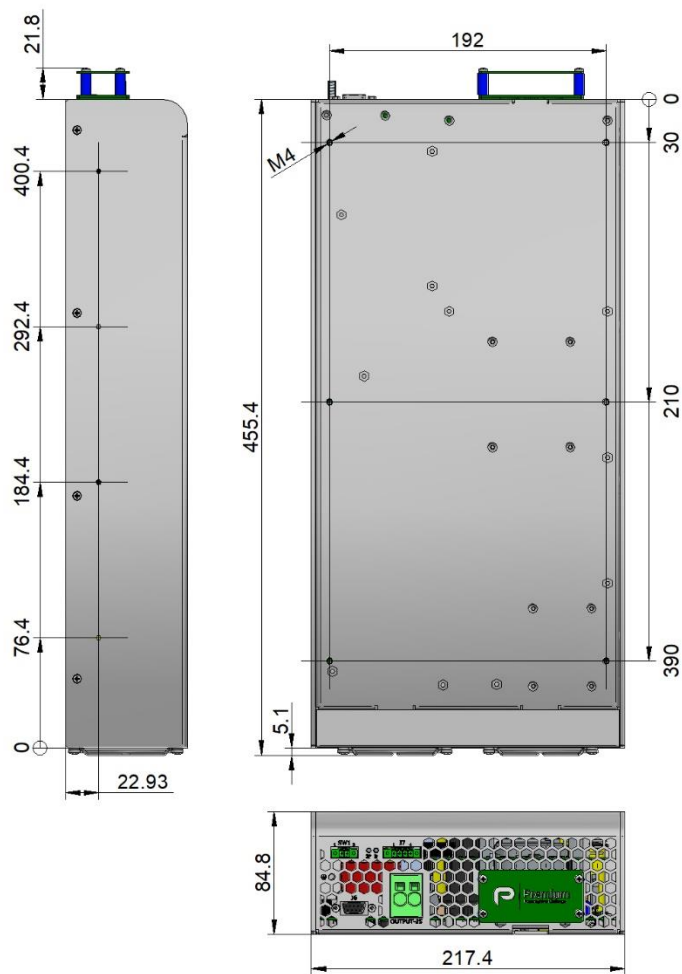

**NOTE:** All the fixing holes are M4. Maximum screw length inside the converter 5mm

ACCESSORIES

Description	Notes	CODE
Mounting brackets kit	Contains two brackets and screws	NP-9282

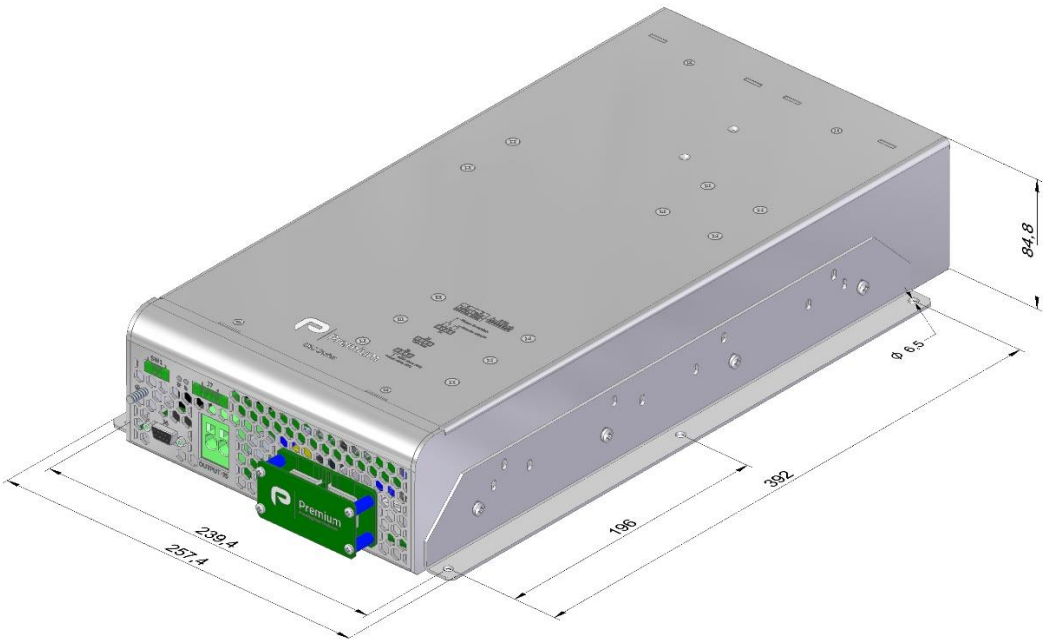



## CE EU DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,  
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/DC converter  
Models: **CBS-10K-6001 ... 6005**

is in conformity with the provisions of the following EU directive(s):

2014/35/EU SI 2016 No 1101	Low voltage / The electrical equipment (safety) regulations
2014/30/EU SI 2016 No 1091	EMC / Electromagnetic compatibility regulations
2011/65/EU Annex II and its amendment 2015/863/EU SI 2012 No. 3032	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

and that standards and/or technical specifications referenced below have been applied:

N 62368-1: 2014	Safety. Audio/video information and communication technology equipment
EN 61000-6-3: 2007	Generic emission standard
EN 61000-6-2: 2005	Generic immunity standard
EN 50155: 2017*	Railway applications. Electronic equipment used on rolling stock material
EN 50121-3-2: 2016*	Railway applications. EMC Rolling stock equipment

\* Optional, See annexe

CE marking year: **2021**

### Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 19-04-2021

Albert Solé  
Technical director

**PREMIUM S.A.** is an ISO9001 and ISO14001  
certified company by **Bureau Veritas**

## ANNEXE

Applicable values for the different sections of the norm EN50155: 2017							
4.3.1	Working altitude	Up to 2000m					
4.3.2	Ambient temperature	Class OT1 (-25 to 55°C): load < 100% Class OT3 (-25 to 70°C): load <62.5%					
4.3.3	Switch-on extended operating temp.	ST1					
4.3.4	Rapid temperature variations	H1					
4.3.5	Shocks and vibrations	According EN61373:2010 Category 1 class B					
4.3.6	EMC Electromagnetic Compatibility  EN50121-3-2:2016						
		<b>Test</b>	<b>Norm</b>	<b>Port</b>	<b>Frequency</b>	<b>Limits</b>	
		Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m	
					230MHz...1GHz	47dB(µV/m) Qpk at 10m	
					1...3GHz	Do not apply	
		Conducted emissions	IEC55016	Input	3...6GHz	Internal freq. < 108MHz	
					150kHz...500kHz	99dB(µV) Qpk	
					500kHz...30MHz	93dB(µV) Qpk	
		<b>Test</b>	<b>Norm</b>	<b>Port</b>	<b>Severity</b>	<b>Conditions</b>	<b>P</b>
		Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B
					±8kV	Contact (conductive parts)	
		Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A
					10V/m	1.4...2.1GHz M. 80% 1kHz	
					5V/m	2.1...2.5GHz M. 80% 1kHz	
					3V/m	5.1...6Ghz M. 80% 1kHz	
		Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A
				Output	±2kV		
Signal	±2kV						
PE	±1kV						
Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B		
		Input L to PE	±2kV				
Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A		
		Output	10V				
		Signal	10V				
		PE	10V				
Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A		
P= Performance criteria, L= Line, PE= Protective Earth							
4.3.7	Relative humidity	Up to 95%					
5.1.1.2	DC power supply range	From 0.70 to 1.25 Un continuous					
5.1.1.3	Temporary DC power supply fluctuation	From 0.60 to 1.40 Un 0.1s From 1.25 to 1.40 Un 1s without damage					
5.1.1.4	Interruptions of voltage supply	Class S1 (without interruptions)					
5.1.1.6	Input ripple factor	10% peak to peak with a DC Ripple Factor of 5 %					
5.1.3	Supply change-over	0.6 Un duration 100 ms (without interruptions). Performance criterion A					
7.2.7	Input reverse polarity protection	By external fuse					
10.7	Protective coating for PCB assemblies	Class PC2					
13.3	Tests list	1 Visual Inspection		Routine			
		2 Performance test		Routine			
		3 Power supply test		Routine			
		4 Insulation test		Routine			
		5 Low temperature storage test		-			
		6 Low temperature start-up test		Type			
		7 Dry heat test		Type			
		8 Cyclic damp heat test		Type			
		9 Salt mist test		-			
		10 Enclosure protection test (IP code)		-			
		11 EMC test		Type			
		12 Shocks and vibrations test		Type			
		13 Equipment stress screening test		Routine: 24h at 40°C and load 100%			
		14 Rapid Temperature variation test		Type			