



Picture for reference only

Power Generator

FD 250 I-Q

Article:

Code: F.0250.IZ-Q3300T900-02

Main Features

- Digital voltage regulation +/-0,25 %
- Three phase voltage control
- Low disturbance level THD <3%
- Alternator short circuit capacity 320% 10s I_n (optional 300 %)
- Class H insulation
- Protection index IP23
- Performance class G3 (acc. ISO 8528-5)
- Ready to load just after start
- AMF and MRS functionality and protection
- Autonomy 22,2 h with 75 % load

General Data

Maximum power ESP	275,0 kVA / 220,0 kW
Nominal power PRP	250,0 kVA / 200,0 kW
Nominal Current PRP	361,0 A
Frequency	50 Hz
Voltage	400 V
Emission standard	fuel optimized
Fuel	Diesel (EN 590)
Fuel tank capacity	900 l
Fuel consumption @ 50% / 75% / 100% / 110% PRP	24,9 / 36,4 / 51,5 / 57,2 l/h
Autonomy @ 75% / 100% load	22,2 / 15,7 h
Weight without fuel	~2300 kg
Dimensions L x W x H	3300 x 1200 x 2200 mm
Guaranteed noise power L_{wa}	97 dBA
Acoustic pressure @7mL_{pa}	~68 dBA

Main Components & Equipment

- FPT (Iveco) NEF67TE8W engine
- Linz PRO28S D/4 alternator
- Brushless alternator
- Digital AVR DR-30
- ComAp IL4-AMF25 Controller
- Schneider NSX 400 3P + Mic.2.3 type generator circuit breaker
- GCB shunt release coil
- Linear automatic battery charger
- Engine heater
- electronic speed governor
- Fuel system common rail
- Welded frame with 900 l fuel tank, spill containment and noise insulation
- Two fuel inlets
- Four lifting eyes
- Extended forklift skids for easy attachment to the ground

For details see page 3

Definitions

Nominal Power PRP:

Prime power available in variable load application in accordance with ISO 8528, A 10% overload capacity is available for a period of 1 hour within a 12h period of operation. Average power consumption should not exceed 80% PRP for each 24h of operation.

Maximum power ESP:

Emergency standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload allowed, limited to 200h of operation per year, max average power consumption 70% of ESP.

Norms and Directives

- Machinery directive 2006/42/EC
- Low voltage directive 2014/35/EU
- EMC directive 2014/30/EU
- Noise directive 2000/14/EC
- ISO 8528-1/2018, ISO 8528-5/2022
- ISO 8528-13:2016
- IEC 60204-1

Contact data

FOGO Sp. z o.o.

Święciechowska 36, 64-115 Wilkowice
agregaty@fogo.pl, www.fogo.pl



Power Generator

FD 250 I-Q

Article:
Code: F.0250.IZ-Q3300T900-02

Engine


Manufacturer	FPT (Iveco)
Type	NEF67TE8W
Made in	Italy
Engine power	216,0 kW
Emission standard	fuel optimized
Rotation per minute	1500 rpm
Engine governor	electronic
Governor class	G3 (ISO 8528-5)
Displacement	6,7 l
No of cylinder	6
Fuel system	common rail
Electrical system	24 V
Cooling system capacity	25,5 l
Oil pan capacity	17,2 l
Fuel type	Diesel (EN 590)

Alternator

Manufacturer	Linz
Type	PRO28S D/4
Made in	Italy
Nominal Voltage	400 V
Nominal power factor (cos φ)	0,8
Ambient temperature, altitude	40 °C, 1000 m a.s.l.
Nominal Power	250,0 kVA
Protection index	IP 23
No of bearing	Single bearing
Coupling	Direct
Technology	Brushless
Short circuit maintaining capacity	320% 10s
Efficiency	92,7 %
Insulation class	H
Total harmonic content THD	<3 %
Reactance Xd''	10 %
Voltage regulator type	DVR, cyfrowy
Voltage measurement	3 phase
Voltage accuracy	+/- 0,25 %
AVR supply system	Auxiliary winding
AVR supply optional	PMG

Controller

- Controller type: ComAp IntelliLite 4 AMF 25
- Support of Dual AMF/MRS applications
- Direct communication with EFI engines
- Total remote monitoring and control
- Intuitive operator interface, adjustable Main Screen
- Real time clock with battery back-up
- Comprehensive history log with up to 350 events
- 3 phase true RMS current and voltage measurement
- Both mains and generator voltage detection
- Active/Reactive Power and Power Factor per phase measurement
- Run Hours counter with source selector
- 3 maintenance timers (counting even under zero)
- Multipurpose flexible timers (also for rental)
- Battery voltage measurement
- Complete engine and alternator protection
- CAN modules support
- USB port on-board
- Inbuild RS485
- 2 slots for plug-in modules
- Full remote communications support (AirGate 2.0)
- Plug-in module concept for more remote communication capabilities (Ethernet /4G, Modbus TCP/RTU, SNMP v1/v2c.)
- Cloud-based monitoring and control via WebSupervisor (optional module required)
- Geofencing and tracking based on GPS position (optional module required)
- Active SMS and emails
- 3 levels of password protection
- Cyber security improvement
- In-built PLC, complemented with a monitoring/debugging tool, for additional functionality, if required
- Spare inputs and outputs available by default: binary input – 2, binary output – 2, analogue input – 3,
- A version for low temperature is also available

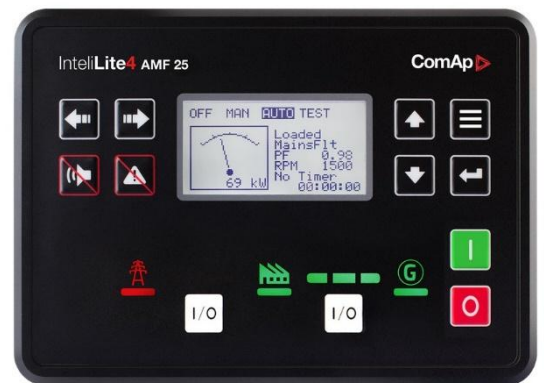



Power Generator FD 250 I-Q

Article:
Code: F.0250.IZ-Q3300T900-02

Standard equipment

- FPT (Iveco) NEF67TE8W engine
- Electronic engine speed governor
- Oil low pressure switch
- Oil pressure sensor
- Engine high temperature switch
- Engine high temperature sensor
- Engine preheating with thermostat
- Engine oil Titan Cargo 15W40
- Fuel filter with water separator
- Coolant Fuchs Maintain Fuchs Maintain Fricofin LL-50
- Coolant inlet outside, on the top of the canopy
- Starting batteries 2x 100 Ah
- Linear automatic battery charger
- Linz PRO28S D/4 alternator
- Digital AVR DVR, cyfrowy
- GCB Schneider NSX 400 3P + Mic.2.3
- GCB shunt release coil
- ComAp IL4-AMF25 controller
- Acoustic alarm
- Emergency stop button
- Silenced canopy, RAL 7024
- Fuel tank integrated with a frame and spill containment
- Two fuel inlets inside the canopy
- Fuel level indicator
- Engine and alternator anti vibration mounts
- Exhaust silencer with compensator
- Forklift supports and lifting eyes

Optional equipment

- Oil draining hand pump
- Battery disconnecter
- 4P Schneider NSX Micrologic 2.3 GCB
- Power Lock type power output
- Power sockets box
- Transfer switch controlled by generator controller
- Transfer switch with ATS controller
- ATS accessories for outdoor application
- GPRS communication card
- Ethernet card
- RS 485, RS 232 card
- Remote display
- Fuel inlet outside of the canopy with lock
- Generator spill containment level detector
- External, double wall fuel tank 1 000 – 10 000 l
- Fuel tank filling pump and shut-off valve

Maintenance guidelines

Fuel filters replacement	500 h / 1 year
Oil replacement	After first 100h, then every 500 h / 1 year
Oil filters replacement	After first 100h, then every 500 h / 1 year
Coolant replacement	1000 h / 2 years
Air filter replacement	500 h
Battery replacement	2 years
Electrical installation	According to local requirements, at least once per year

Installation guidelines

Power terminal	GCB terminal
Recommended cable for up to 30m power cable way	Flexible 2x5x70 mm ²
Recommended cable for do 30m generator heater supply	Flexible 3x2,5 mm ²
Exhaust pipe min diameter (max. 7 m, 4 bends)	101,6 mm
Exhaust pipe min diameter (max. 15 m, 4 bends)	114,3 mm

*For additional cable connection with FOGO ATS see ATS wiring diagram

Warranty

Continuous operation generators	12 months up to 1000 working hours
--	------------------------------------