



NORANDEX™

VINYL SIDING, SOFFIT & ACCESSORIES



Full Line of Vinyl Siding, Soffit & Accessories

www.norandex.com

Quality Story2

Features & Benefits3

Vinyl Siding Products

Rustic Hill®4-5

Home Accents®6-7

Polar Wall® Plus!.....8-9

Great Barrier® 10-11

Board & Batten..... 12-13

Cedar Knolls™..... 14-15

Cambridge Beaded® 16-17

Woodsman Select..... 18-19

Summit Manor®..... 20-21

Vinyl Soffit Products

Vinyl Soffit Benefits22

Beaded Porch Panel.....23

Double 5" Premium Vinyl Soffit24

Triple 3.3" Hidden Vent Vinyl Soffit25

Remodeler Vinyl Soffit..... 26-27

Builder Vinyl Soffit 28-29

Vinyl Accessories & Color Availability

Vinyl Accessories..... 30-31

Color Availability..... 32-33

NailRIGHT™34

General Information

Product Specifications35

FROM OUR POINT OF VIEW

Homeowners have numerous cladding choices when it comes to finishing the exterior of their home.

They often rely on the expertise of their new construction or remodeling contractor for recommendations on the best materials to use. Consumers want a finish that makes their home stand out in the neighborhood, but also one that will stand up under extreme weather conditions. They want peace of mind knowing the exterior will retain its beauty years down the road, with virtually no maintenance, and is strongly warranted for customer satisfaction.

Homeowners know meeting these requirements is not too much to ask. And if you ask professional contractors from around the country for their recommendations, many would choose Norandex™ brand vinyl siding products. That’s because Norandex Vinyl Siding offers homeowner-preferred choices in styling and performance.

Because of the varying weather patterns throughout the states, Norandex offers both insulated and uninsulated vinyl siding. Products that protect against fade when exposed to sunshine, that help insulate a home from winter’s chills, and will perform in areas prone to extremely high winds.

An assortment of truly distinctive profiles, in combination with a wide array of beautiful colors, enables homeowners to create that perfect exterior finish they’ve always dreamed about. The availability of solid vinyl soffit and accessories not only helps accentuate the home, but are also low maintenance products complementing the siding selection.

And all Norandex Vinyl Siding products carry one of the strongest homeowner warranty packages available in the industry...A Limited Lifetime Transferable Warranty with ColorHold® Lifetime Fade Protection.



XLok™ Technology features a reinforced nail hem and the NailRIGHT™ Siding Installation System. Together they help provide a quality installation that’s properly applied and firmly affixed to the wall.



For areas prone to adverse weather conditions, Norandex offers vinyl siding engineered for excellent wind load performance that’s been tested to withstand hurricane force winds.



ColorHold® is a highly durable capstock that resists fading and discoloring and is backed by a limited lifetime transferable warranty*, including Lifetime Fade Protection. Specify the most brilliant and rich hues with absolute confidence.

*Visit www.norandex.com to view warranty details.



A beautiful collection of darker, richer colors with tremendous homeowner appeal that features ColorHold technology to resist fading and discoloring.



The Norandex proprietary NailRIGHT Siding Installation System makes proper nailing fast and easy. See the full story on page 34.



Norandex Vinyl Siding products carry one of the strongest homeowner protection warranties in the industry – a Limited Lifetime Transferable Warranty with ColorHold Lifetime Fade Protection. Visit www.norandex.com for complete warranty details.



Norandex Vinyl Siding is proudly made in the U.S.A. to the highest American quality standards by trained and skilled professionals.



Norandex Vinyl and Insulated Vinyl Siding certified through The Polymeric Exterior Products Association (PEPA) program are verified by a third-party, accredited inspection agency to meet or exceed the long-standing, accepted ASTM industry standards for quality. Consult the PEPA website at www.polymericexteriors.org (www.vinylsiding.org) for a current list of certified products.

- Available in three styles:
 - **5" Double-course Cape Cod Shingle**
 - **.075" panel thickness**
 - Uniform cedar woodgrain texture
 - **7" Traditional Shake**
 - **.085" panel thickness**
 - Deep cedar woodgrain texture
 - 6'-8" extended length panel
 - Reinforced nailing hem
 - Matching outside corner post
 - **9" Hand-Split Shake**
 - **.100" panel thickness**
 - Deep cedar woodgrain texture
 - 6'-2" extended length panel
 - Reinforced nailing hem
 - Matching outside corner post

- Durable polymer construction for strength and durability

- Variable, self-aligning nail slots for a straight, secure installation and proper adherence to the wall for weather-related expansion and contraction

- Self-concealing side tabs, with no visible overlaps, for a natural looking finish, with a temperature chart to optimize installation in any weather

- Realistic-looking cedar woodgrain appearance

- Two completely different panels of cedar segments in varying widths provide a more random, realistic shake look

- 9/16" panel projection provides rigidity and casts deep, appealing shadow lines

- Matching and contrasting soffit and accessories

- Limited lifetime transferable warranty


- Won't blister, crack, flake, peel or rot like wood exteriors

Product specifications on page 35 do not reflect Rustic Hill specs. A Certificate of Conformance is available upon request.



5" Double-Course Cape Cod Shingle

10" exposure per panel (interlocked)
64-1/8" long (exposed length)
67-3/16" long (overall)
11 pieces per carton
1/2 square per carton

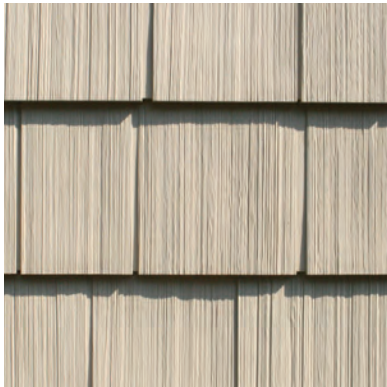


7" Traditional Shake

7" exposure per panel
80-3/8" long (exposed length)
81-1/4" long (overall length)
13 pieces per carton
1/2 square per carton



9" Hand-Split Shake

9" exposure per panel
74-1/2" long (exposed length)
75-5/8" long (overall length)
11 pieces per carton
1/2 square per carton

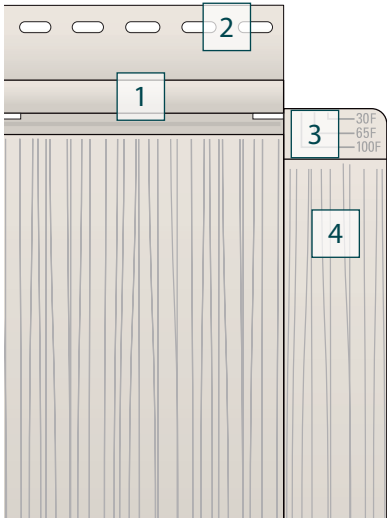

XTRA BENEFITS

1. Continuous Panel Lock
2. Self-Aligning Nail Slots
3. Temperature Chart
4. Self-Concealing Side Tabs



Rustic Hill 7" Traditional Shake - Vintage Grey
Cedar Knolls Double 4" - Jamestown Blue

THREE DISTINCTIVE STYLES:

- 5" Double-Course Cape Cod Shingle
- 7" Traditional Shake
- 9" Hand-Split Shake

33 BEAUTIFUL COLORS

White	Beige	Cream	Tan	Champagne	Wheat	Sandstone	Cactus	Silver
Sierra PREMIUM	Tumbleweed PREMIUM	Mocha PREMIUM	Khaki PREMIUM	Olive PREMIUM	Smoke PREMIUM	Granite PREMIUM	Wedgewood PREMIUM	Russet DESIGNER
Maverick Brown DESIGNER	Rustic Cedar DESIGNER	Acadia Green DESIGNER	Myrtle DESIGNER	Vintage Grey DESIGNER	Seaport DESIGNER	Jamestown Blue DESIGNER	Steel Blue DESIGNER	Deep Water DESIGNER
Graphite DESIGNER	Carbon Brown DESIGNER							

Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

Deep Cedar Woodgrain Pattern (Traditional)

Ever Weathered COLOR COLLECTION

Four colors inspired by the classic beauty of natural cedar.

Our weathered collection has a traditional cedar profile. We have created a natural color palette reflecting the look of exposed, raw cedar, depicting the warm and inviting tones of aging cedar shingles. The four hues of northern white and western red are shown below, along with 29 other beautiful colors.

Mystic Gray EVER WEATHERED COLLECTION	Pacific Amber EVER WEATHERED COLLECTION	Rockport Beach EVER WEATHERED COLLECTION	Olympic Woods EVER WEATHERED COLLECTION
--	---	--	---

- Available in three styles:
 - **Staggered Shake**
 - Dramatic cedar grain detail, uneven patterns, rough-sawn edges, and varied widths create richness
 - Profile has a 7" exposure
 - **Split Shake**
 - Random grains and grooves for hand-split cedar's allure
 - Deeply textured for contrast between shadow and light
 - Profile has a 7" exposure
 - **Perfection Shingle**
 - Clean lines and deep textures create the perfect balance
 - Random widths and highlighted grains add tradition
 - Profile has a 7" exposure
- Can be used in entire home applications or as a finishing touch in a gable or dormer
- Easy interlock between shapes means Home Accents® can be used separately or mixed
- Same installation technique as siding with a full-length nailing hem
- Can be installed any time of the year
- Random design and hidden seams mean even small pieces are usable, resulting in up to 67% less scrap
- Class A flame spread rating
- Matching and contrasting soffit and accessories



Staggered Shake
7" exposure per panel
60-3/4" long
34 pieces per carton
1 square per carton



Split Shake
7" exposure per panel
60-3/4" long
34 pieces per carton
1 square per carton



Perfection Shingle
7" exposure per panel
60-3/4" long
34 pieces per carton
1 square per carton



Split Shake Outside Corner Post kit
3-1/2" x 3-1/2" exposure
56" long
Kit contains 4 corners and 8 pieces of 1" J-Channel
18.7 linear feet per carton
For use with Split Shakes and Staggered Shakes.



Perfection Shingle Outside Corner Post kit
3-1/2" x 3-1/2" exposure
56" long
Kit contains 4 corners and 8 pieces of 1" J-Channel
18.7 linear feet per carton


Product specifications on page 35 do not reflect Home Accents specs. A Certificate of Conformance is available upon request.



Home Accents Split Shake - Cactus
Woodsman Select - Cactus

THREE POPULAR PROFILES:

- Staggered Shake
- Split Shake
- Perfection Shingle

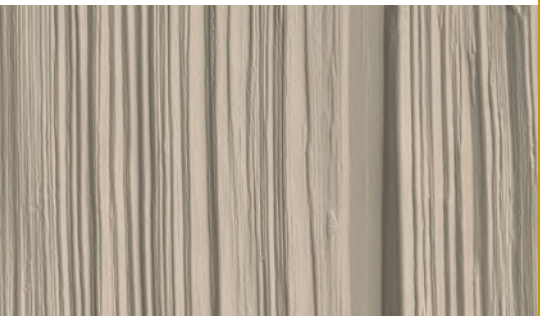

Dramatic Cedar Grain Detail (Staggered Shake)

33 BEAUTIFUL COLORS

White	Linen	Cream	Tan	Champagne	Wheat	Sandstone	Cactus	Silver
Cobblestone PREMIUM	Sierra PREMIUM	Tumbleweed PREMIUM	Mocha PREMIUM	Khaki PREMIUM	Fern PREMIUM	Olive PREMIUM	Dove Gray PREMIUM	Smoke PREMIUM
Granite PREMIUM	Wedgewood PREMIUM	Geneva Blue PREMIUM	Russet DESIGNER	Maverick Brown DESIGNER	Rustic Cedar DESIGNER	Firebrick DESIGNER	Acadia Green DESIGNER	Myrtle DESIGNER
Seaport DESIGNER	Jamestown Blue DESIGNER	Steel Blue DESIGNER	Deep Water DESIGNER	Graphite DESIGNER	Carbon Brown DESIGNER			

Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

Polar Wall Plus!

INSULATED SIDING SYSTEM

- **.046" panel thickness, .052" for S12 Board & Batten**, with a low gloss natural cedar woodgrain pattern
- Available in three styles:
 - **Double 6" Clapboard**, 5/8" panel projection
 - **Double 5" Dutchlap**, 3/4" panel projection
 - **S12 Board & Batten**, 12" exposure per panel 10" face + 2" batten
- Standard Design Pressure Rating: 76.0 psf*
- XLoc™ Technology combines the BearHug® Lock, a superior full reversed rolled-over nail hem that doubles the thickness of the panel where it's nailed to the wall, and the Norandex proprietary NailRIGHT Siding Installation System for an installation that's secure and accurate
- Thick insulating foam helps reduce energy loss through walls and studs, repel insects, and reduce sound transmission, while still being permeable
- Matching and contrasting soffit and accessories
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection

BEARHUG® LOCK



The BearHug® locking system includes a rolled-over double nail hem and 3/4" panel projection* for excellent wind load resistance.

**5/8" panel projection available on D6 panel.*

ACCESSORIES THAT ENHANCE THE BENEFITS OF THE POLAR WALL PLUS! INSULATED SIDING SYSTEM



6" Outside Corner Post



3-1/2" Outside Corner Post

These accessories are available with foam for added rigidity and energy efficiency.



Double 6" Clapboard

- 2-6" exposure per panel
- 12' 6" long
- 8 pieces per carton
- 1 square per carton



Double 5" Dutchlap

- 2-5" exposure per panel
- 12' long
- 10 pieces per carton
- 1 square per carton



S12 Board & Batten

- 12" exposure per panel
- 10" face + 2" batten
- 12' 6" long
- 10 pieces per carton
- 1 square per carton



Over time, the seams on regular vinyl tend to open up because there is nothing to support the siding.



Laminated foam provides excellent support to the Polar Wall Plus! Exterior System, so the seams remain practically invisible.



Polar Wall Plus! Double 6" Clapboard - Granite

THREE DISTINCTIVE PROFILES:

- Double 6" Clapboard
- Double 5" Dutchlap
- S12 Board & Batten



Low Gloss Natural Cedar Woodgrain Pattern

19 BEAUTIFUL COLORS*



***Firebrick, Steel Blue and Graphite are not available in Double 5" Dutchlap.**
▲ Board & Batten colors.

Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

ADDITIONAL WARRANTY COVERAGE ON FOAM

Structural lamination integrity and thermal performance of Polar Wall Plus! laminated foam is warranted for twenty (20) years.

Foam Specifications

- Density: Nominal 1.0 pound per cubic foot (test method ASTM C-303). S12 Board & Batten foam density is 2.0 per cubic foot.
- Flammability: Polar Wall Plus! laminated foam is fabricated using modified expandable polystyrene, treated with a fire-retardant chemical, and will not support combustion. Although "Modified EPS" contains a flame-retardant agent, it is an organic material and should therefore be considered flammable if exposed to an open flame or ignition source.
- Water Permeability: Not more than 5.0 perm/inch maximum (test method ASTM E-96)
- Polystyrene breathes and is not a vapor barrier
- Water Absorption: Less than 4.0% by volume (test method ASTM C-272)
- Capillarity: None



Physical Data

Polystyrene Thickness (Nominal)	
• Double 6" Clapboard	1-1/4"
• Double 5" Dutchlap	1-1/8"
• S12 Board & Batten	1-1/8"

Long-Term Thermal Performance

R-Value	
• Double 6" Clapboard	2.48
• Double 5" Dutchlap	2.42
• S12 Board & Batten	2.7

The R-Value of all profiles in the Polar Wall Plus! Exterior System when tested in accordance with ASTM D1363 exceed the ASTM D7793 standard specifications for insulated siding established by the Vinyl Siding Institute. A product's R-Value is a measure of the thermal resistance. The higher the R-Value, the better the insulation's effectiveness.

Thermal Expansion

Expanded polystyrene is highly compatible with vinyl siding due to their nearly identical coefficients of expansion and contraction.

Environmentally Friendly

The Polar Wall Plus! Exterior System is constructed from inert organic materials and contains no CFCs, HCFCs, or formaldehyde.

*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 16" on center. S12 Board & Batten must be nailed at 12" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.

- **.046" panel thickness** with a low gloss natural cedar woodgrain pattern
- Available in three styles:
 - **Double 4" Clapboard**
 - **Double 5" Clapboard**
 - **Double 5" Dutchlap**
- 3/4" panel projection
- Standard Design Pressure Rating: 78.0 psf*
- Extended 16.66' lengths available
- XLoc Technology combines JawsLock®, a superior full reversed rolled-over nail hem that doubles the thickness of the panel where it's nailed to the wall, and the Norandex proprietary NailRIGHT Siding Installation System, for an installation that's secure and accurate
- Matching and contrasting soffit and accessories
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection

JAWSLOCK®



The JawsLock locking system has been engineered for faster, straighter installations. Combines a 3/4" panel projection, a curled return leg, and an extra heavy-duty top lock.

WIND LOAD TEST



In wind load tests, the double-thick Great Barrier hem was strong enough to bend the nail heads.


*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 16" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.



Double 4" Clapboard
2-4" exposure per panel
12' 6" long
12 pieces per carton
1 square per carton

Extended length

Double 4" Clapboard
2-4" exposure per panel
16.66' long
14 pieces per carton
1.555 squares per carton

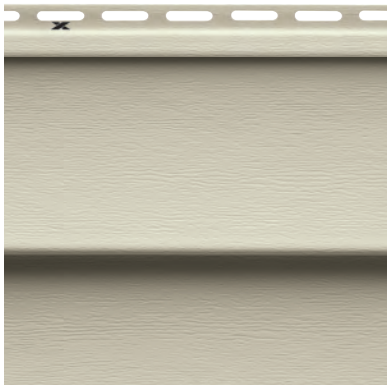

Double 5" Clapboard
2-5" exposure per panel
12' long
10 pieces per carton
1 square per carton

Extended length

Double 5" Clapboard
2-5" exposure per panel
16.66' long
12 pieces per carton
1.66 squares per carton



Double 5" Dutchlap
2-5" exposure per panel
12' long
10 pieces per carton
1 square per carton


Extended length

Double 5" Dutchlap
2-5" exposure per panel
16.66' long
12 pieces per carton
1.666 squares per carton

EXTENDED LENGTH



Standard vinyl siding



Great Barrier extended length premium vinyl siding

For a virtually seamless appearance, Great Barrier® is available in extended 16.66' lengths, which means up to one-third fewer visible seams on the entire surface of the home.

Up to **1/3** Fewer Seams



Great Barrier Double 4" Clapboard - Dove Gray

THREE DISTINCTIVE PROFILES:

- Double 4" Clapboard
- Double 5" Clapboard
- Double 5" Dutchlap

| .046" |

Low Gloss Natural Cedar Woodgrain Pattern

27 BEAUTIFUL COLORS

White	Linen	Cream	Tan	Champagne	Silver	Victorian Stone PREMIUM	Cobblestone PREMIUM	Tumbleweed PREMIUM
Mocha PREMIUM	Khaki PREMIUM	Olive PREMIUM	Dove Gray PREMIUM	Smoke PREMIUM	Granite PREMIUM	Wedgewood PREMIUM	Russet DESIGNER	Maverick Brown DESIGNER
Firebrick DESIGNER	Myrtle DESIGNER	Vintage Grey DESIGNER	Seaport DESIGNER	Jamestown Blue DESIGNER	Steel Blue DESIGNER	Deep Water DESIGNER	Graphite DESIGNER	Carbon Brown DESIGNER

Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

Board & Batten

VERTICAL VINYL SIDING

- **.052" panel thickness** with a cedar grain pattern
- 1/2" panel projection
- Standard Design Pressure Rating: 80.0 psf*
- A vertical panel for whole house or accent applications
- The wide, flat board is accentuated with a narrow batten, replicating an Early American look
- Matching and contrasting soffit and accessories
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection



Can be used in whole house applications or as an accent.

*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 12" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.



Board & Batten Vertical
 7" exposure per panel
 10' long
 17 pieces per carton
 1 square per carton



The .052" thick panel combined with a heavy-duty lock ensure a secure installation.



Board & Batten S7 - Granite


• 7" Profile

| .052" |

22 BEAUTIFUL COLORS

White	Linen	Champagne	Sandstone	Cactus	Silver
Victorian Stone PREMIUM	Sierra PREMIUM	Mocha PREMIUM	Smoke PREMIUM	Granite PREMIUM	Harbor Fog PREMIUM
Russet DESIGNER	Maverick Brown DESIGNER	Firebrick DESIGNER	Myrtle DESIGNER	Vintage Grey DESIGNER	Seaport DESIGNER
Steel Blue DESIGNER	Deep Water DESIGNER	Graphite DESIGNER	Carbon Brown DESIGNER		

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

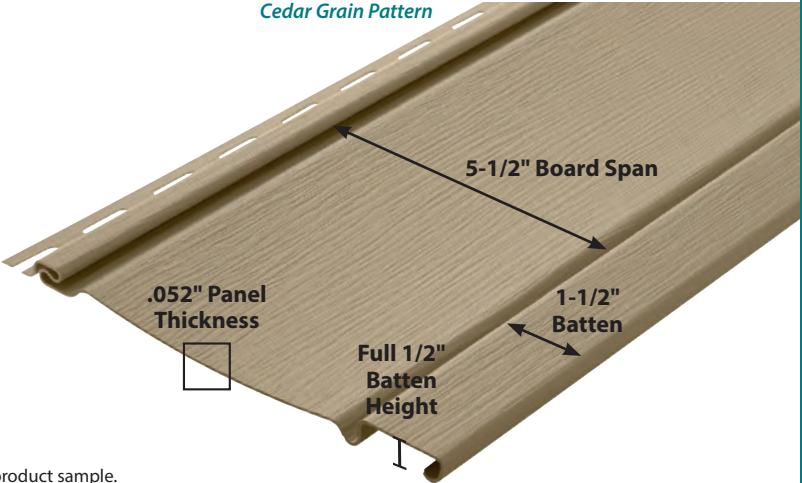

- **.044" panel thickness** with a natural cedar embossed woodgrain pattern
- A 5/8" panel projection provides rigidity and casts deep, appealing shadow lines
- Available in three styles:
 - **Double 4" Clapboard**
 - **Double 5" Clapboard**
 - **Double 5" Dutchlap**
- Standard Design Pressure Rating: 56 psf*
- XLoc Technology combines the TitanBar™ Reinforced Nail Hem and the NailRIGHT Siding Installation System, two innovations that help ensure the siding is securely interlocked and properly affixed to the wall
- Matching and contrasting soffit and accessories
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection


TitanBar™
REINFORCED NAIL HEM



A heavy-duty extended return leg snaps tightly into the TitanBar Reinforced Nail Hem, which is double the thickness of the siding panel under the nail head, for an installation that's solid and secure, protecting against panel blow off in adverse weather conditions.



Double 4" Clapboard
2-4" exposure per panel
12' 6" long
24 pieces per carton
2 squares per carton

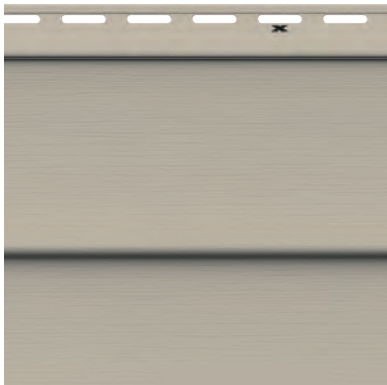

Double 5" Clapboard
2-5" exposure per panel
12' long
20 pieces per carton
2 squares per carton



Double 5" Dutchlap
2-5" exposure per panel
12' long
20 pieces per carton
2 squares per carton



Cedar Knolls Double 5" Clapboard - Granite

THREE DISTINCT PROFILES:

- Double 4" Clapboard
- Double 5" Clapboard
- Double 5" Dutchlap

| .044" |

Natural Cedar Embossed Woodgrain Pattern

31 BEAUTIFUL COLORS

White	Beige	Cream	Yellow	Champagne	Wheat	Sandstone	Cactus	Silver
Victorian Stone PREMIUM	Sierra PREMIUM	Mocha PREMIUM	Khaki PREMIUM	Fern PREMIUM	Olive PREMIUM	Smoke PREMIUM	Granite PREMIUM	Harbor Fog PREMIUM
Geneva Blue PREMIUM	Russet DESIGNER	Maverick Brown DESIGNER	Rustic Cedar DESIGNER	Firebrick DESIGNER	Acadia Green DESIGNER	Myrtle DESIGNER	Seaport DESIGNER	Jamestown Blue DESIGNER
Steel Blue DESIGNER	Deep Water DESIGNER	Graphite DESIGNER	Carbon Brown DESIGNER	Colors are mechanically reproduced. For color accuracy, please see actual product sample.				

*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 16" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.

- **.044" panel thickness** with a low gloss brushed pattern
- Full traditional U-groove beaded design
- 5/8" panel projection
- Standard Design Pressure Rating: 42.3 psf*
- Features the Norandex proprietary NailRIGHT Siding Installation System for a safe, secure installation
- Matching and contrasting soffit and accessories
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection



XLok Technology features a reinforced nail hem and the NailRIGHT Siding Installation System. Together, they help provide a quality installation that's properly applied and firmly affixed to the wall.



Cambridge Beaded®
6-1/2" exposure per panel
12'4" long
30 pieces per carton
2 squares per carton



Cambridge Beaded - Silver

*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 16" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.



Cambridge Beaded - Champagne

• 6-1/2" Cambridge Beaded

| .044" |

Low Gloss Brushed Pattern

11 BEAUTIFUL COLORS

White	Beige	Cream	Tan	Champagne	Wheat	Sandstone	Cactus
Silver	Sierra PREMIUM	Granite PREMIUM	Colors are mechanically reproduced. For color accuracy, please see actual product sample.				



Cambridge Beaded - Sierra


- **.042" panel thickness** with a low gloss natural cedar woodgrain pattern
- 5/8" panel projection provides rigidity and casts deep, appealing shadow lines
- Available in four styles:
 - **Double 4" Clapboard**
 - **Double 5" Clapboard**
 - **Double 4" Dutchlap**
 - **Double 5" Dutchlap**
- D4 Standard Design Pressure Rating: 71.0 psf*
- D5 & D5DL Standard Design Pressure Rating: 31.1 psf*
- XLok Technology combines the TitanBar Reinforced Nail Hem and the Norandex proprietary NailRIGHT Siding Installation System, two innovations that help ensure the siding is securely interlocked and properly affixed to the wall
- Matching and contrasting soffit and accessories
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection

TitanBarTM
REINFORCED NAIL HEM




A heavy-duty extended return leg snaps tightly into the TitanBar Reinforced Nail Hem, which is double the thickness of the siding panel under the nail head, for an installation that's solid and secure, protecting against panel blow off in adverse weather conditions.

*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 16" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.

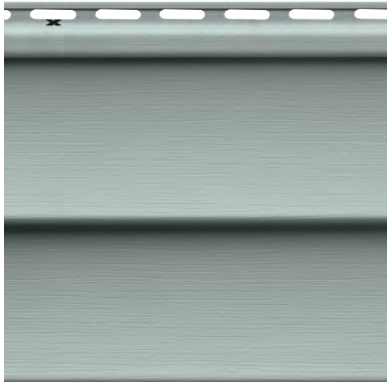

Double 4" Clapboard
2-4" exposure per panel
12' 6" long
24 pieces per carton
2 squares per carton

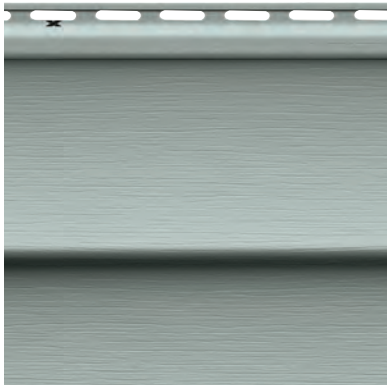

Double 5" Clapboard
2-5" exposure per panel
12' long
20 pieces per carton
2 squares per carton



Double 4" Dutchlap
2-4" exposure per panel
12' 6" long
24 pieces per carton
2 squares per carton




Double 5" Dutchlap
2-5" exposure per panel
12' long
20 pieces per carton
2 squares per carton



Woodsman Select Double 4" Clapboard - Smoke

FOUR DISTINCT PROFILES:

- Double 4" Clapboard
- Double 5" Clapboard
- Double 4" Dutchlap
- Double 5" Dutchlap

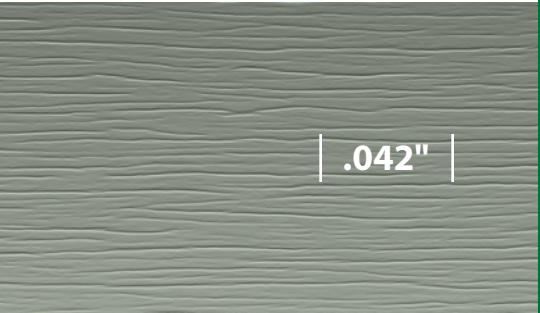

Low Gloss Natural Cedar Woodgrain Pattern

23 BEAUTIFUL COLORS

White	Beige	Cream	Tan	Champagne	Sandstone	Cactus	Silver	Sierra PREMIUM
Tumbleweed PREMIUM	Mocha PREMIUM	Khaki PREMIUM	Fern PREMIUM	Olive PREMIUM	Smoke PREMIUM	Granite PREMIUM	Harbor Fog PREMIUM	Wedgewood PREMIUM
Russet DESIGNER	Maverick Brown DESIGNER	Seaport DESIGNER	Steel Blue DESIGNER	Graphite DESIGNER				

Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

- **.040" panel thickness** with a low gloss woodgrain pattern
- 1/2" panel projection
- Available in three styles:
 - **Double 4" Clapboard**
 - **Double 5" Clapboard**
 - **Double 4-1/2" Dutchlap**
- Standard Design Pressure Rating: 37.7 psf*
- Features the Norandex proprietary NailRIGHT Siding Installation System for a safe, secure installation
- Matching and contrasting soffit and accessories
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection



Double 4" Clapboard
2-4" exposure per panel
12' 6" long
24 pieces per carton
2 squares per carton



Double 5" Clapboard
2-5" exposure per panel
12' long
20 pieces per carton
2 squares per carton



Double 4-1/2" Dutchlap
2-4-1/2" exposure per panel
12' 1" long
22 pieces per carton
2 squares per carton



Summit Manor Double 4" - Cactus

*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 16" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.



Summit Manor Double 4" Clapboard - Silver
Home Accents Perfection Shingle - Silver

THREE DISTINCT PROFILES:

- Double 4" Clapboard
- Double 5" Clapboard
- Double 4-1/2" Dutchlap

.040"

Low Gloss Woodgrain Pattern

16 BEAUTIFUL COLORS

White	Linen	Beige	Cream	Yellow	Tan	Champagne	Wheat	Sandstone
Cactus	Silver	Sierra PREMIUM	Mocha PREMIUM	Dove Gray PREMIUM	Granite PREMIUM	Wedgewood PREMIUM		

Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

ADD SOFFIT. ADD VALUE.


Remind homeowners of the significant benefits of adding Norandex Premium Vinyl Soffit to their home.

Porch ceilings and areas under overhangs can be difficult and dangerous to maintain. Norandex low-maintenance vinyl soffit is weather resistant so there's never a need to scrape, sand and paint again, saving time and money on periodic upkeep.

A selection of truly distinctive profiles gives homeowners the option of choosing a soffit panel that best accentuates their exterior finish, including an extra thick Double 5" profile that can be used for vertical applications.

To complement their siding selection, Norandex Vinyl Soffit comes in a variety of beautiful colors. The soffit can be perfectly matched to the siding for a unified look or contrasted to add a subtle, appealing highlight.


With weather-resistant Norandex Vinyl Soffit, there's virtually no maintenance ever. This means homeowners can use the extra time and money they save to do the things they truly enjoy.

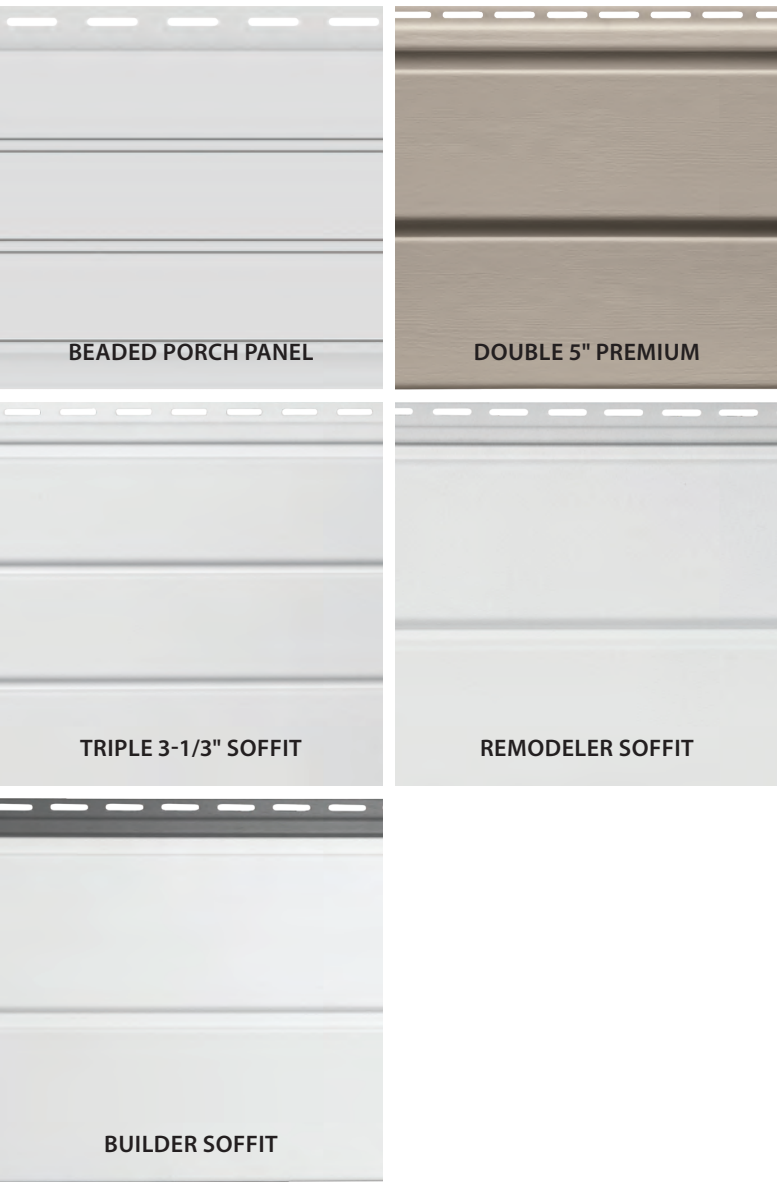

Proper attic ventilation is not something that should be overlooked. Excessive moisture build-up can lead to mold and mildew growth, and cause potential damage to a home's wood framing. That's why many homeowners are making the smart choice to have Norandex Premium Vinyl Soffit installed under their overhangs.

Choose from these ventilation system options:


- Perforated Center Vent
- Perforated Full Vent
- Lanced Full Vent
- Hidden Ridge® features venting slots hidden deep in the U-grooves of the soffit panels. This provides efficient airflow for proper ventilation while maintaining the clean look of solid soffit and helps reduce heating and cooling costs by helping maintain a more energy-efficient attic temperature.

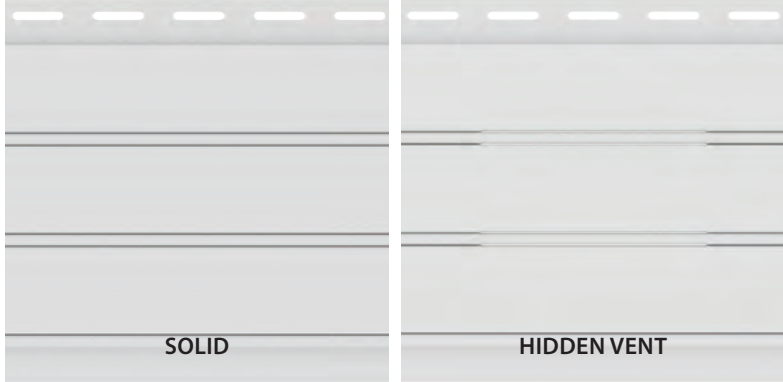

Solid & Hidden Vent

- 6" exposure per panel
- 12' 6" long
- 16 pieces per carton
- 1 square per carton

4 BEAUTIFUL COLORS



Colors are mechanically reproduced. For color accuracy, please see actual product sample.

Beaded Porch Panel

- **.039" panel thickness** with a low gloss smooth finish
- Available in solid and hidden vent styles
- Hidden vent ventilation specifications:
 - Net-free ventilation area per square foot
 - 1.6 sq. in.
- 3/8" panel projection
- Solid panels can be used on porch ceilings and as vertical accent pieces
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection



Solid panels can be used in ceiling applications on porches as shown to beautifully finish the exterior of a home.

Low Gloss Smooth Finish

| .039" |

D5 Premium


VINYL SOFFIT

- **.048" panel thickness** with a natural cedar grain pattern
- Available solid, full vent lanced or with the Hidden Ridge® ventilation system
- Net-free ventilation area per square foot:
 - Hidden Ridge – 1.9 sq. in.
 - Full vent lanced – 8.3 sq. in.
- 3/4" panel projection
- Solid panels can be used in sidewall applications as vertical siding
- Limited lifetime transferable warranty with ColorHold Lifetime Fade Protection

*The test pressures listed on Norandex Vinyl Siding are derived from testing per ASTM D-5206 with nails 12" on center. Please check with your local building inspector for wind load requirements in your area and for the type of structure on which the siding is being installed.



D5 Premium Solid - White

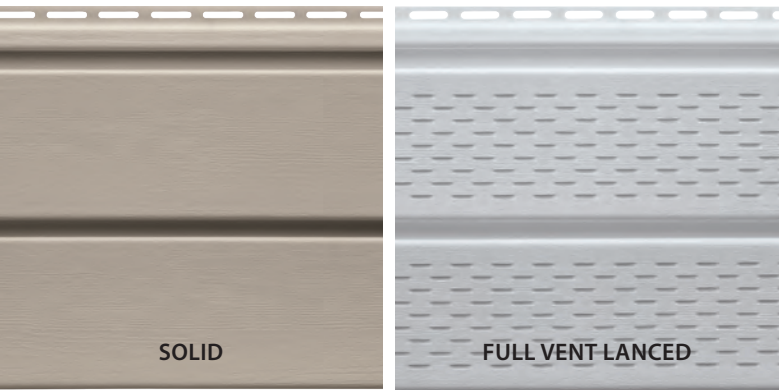

Solid, Full Vent Lanced & Hidden Ridge

2-5" exposure per panel
12' long
15 pieces per carton
1.5 squares per carton

20 BEAUTIFUL COLORS



*Not available in Full Vent Lanced profile.
Colors are mechanically reproduced. For color accuracy, please see actual product sample.



T3.3 Hidden Vent Solid - White



T3.3 Solid Soffit

3 - 3-1/3" exposure per panel
12' long
20 pieces per carton
1.92 squares per carton

T3.3 Hidden Vent Soffit

3 - 3-1/3" exposure per panel
12' long
20 pieces per carton
1.92 squares per carton

5 BEAUTIFUL COLORS



Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

T3.3 Hidden Vent

VINYL SOFFIT


- **.040" panel thickness** with a natural matte pattern
- Available solid and hidden vent
- Hidden vent ventilation specifications:
 - Net-free ventilation area per square foot – 9.6 sq. in.
- 5/8" panel projection

T3.3 Soffit cannot be used in vertical applications.




T3.3 3-1/3" soffit offers the Hidden Ridge Venting System which features venting slots hidden deep in the U-grooves of the soffit panels. This provides efficient airflow for proper ventilation, while maintaining the clean look of solid soffit, and helps reduce heating and cooling costs by maintaining a more energy-efficient attic temperature.

ACCENTING THE SOFFIT AREAS OF A HOME IS A GREAT WAY TO FINISH OFF THE EXTERIOR.

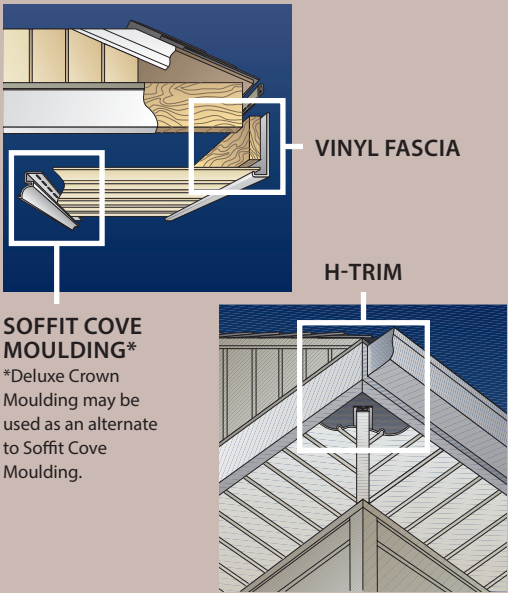


.048"

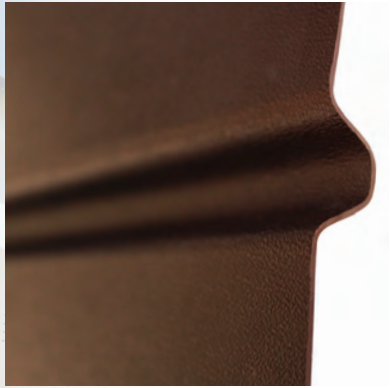

DOUBLE 5" VINYL SOFFIT

- **.040" panel thickness** with a natural matte pattern
- .475" panel projection
- Available solid or full vent perforated
- Full vent perforated net-free ventilation area per square foot – 4.9 square inches

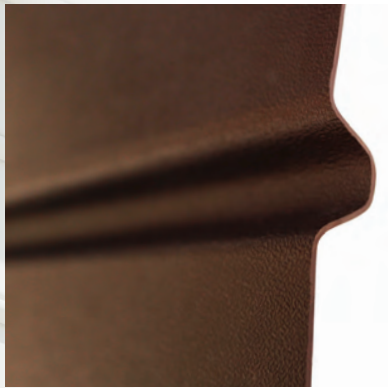

TRIPLE 4" VINYL SOFFIT

- **.040" panel thickness** with a natural matte pattern
- .484" panel projection
- Available solid, full vent perforated or center vent perforated
- Net-free ventilation area per square foot:
 - Full vent: 5.8 square inches
 - Center vent: 1.9 square inches

COLOR AVAILABILITY

	DS SOLID	DS FULL VENT	T4 SOLID	T4 FULL VENT	T4 CENTER VENT
STANDARD COLORS					
White					
Linen					
Beige					
Cream					
Yellow					
Tan					
Champagne					
Wheat					
Sandstone					
Cactus					
Silver					
PREMIUM COLORS					
Victorian Stone					
Cobblestone					
Sierra					
Tumbleweed					
Mocha					
Khaki					
Fern					
Olive					
Dove Gray					
Smoke					
Granite					
Harbor Fog					
Wedgewood					
Geneva Blue					
DESIGNER COLORS					
Russet					
Maverick Brown					
Royal Brown					
Musket Brown					
Rustic Cedar					
Firebrick					
Acadia Green					
Myrtle					
Seaport					
Jamestown Blue					
Steel Blue					
Deep Water					
Graphite					
Carbon Brown					
Black					

*Indicates extended leadtime.
Colors are mechanically reproduced.
For color accuracy, please see actual product sample.

All profiles are intended for soffit use only.



Remodeler Triple 4" Full Vent - White

AVAILABLE IN 5 PROFILES:

- Double 5" Solid
- Double 5" Full Vent
- Triple 4" Solid
- Triple 4" Full Vent
- Triple 4" Center Vent

.040"

Natural Matte Pattern



DOUBLE 5" SOLID

DOUBLE 5" FULL VENT

TRIPLE 4" SOLID

TRIPLE 4" FULL VENT

TRIPLE 4" CENTER VENT

ALL NORANDEX
VINYL SOFFIT:

- Have matching and contrasting siding and accessories
- Never need to be scraped, sanded or painted, leaving you a maintenance-free freshly painted appearance
- Carry a limited lifetime transferable warranty with lifetime fade protection. Visit www.norandex.com to view warranty details

DOUBLE 5" VINYL SOFFIT

- **.036" panel thickness** with a natural brushed finish
- .396" panel projection
- Available solid or full vent perforated
- Full vent perforated net-free ventilation area per square foot – 4.9 square inches

TRIPLE 4" VINYL SOFFIT

- **.036" panel thickness** with a natural brushed finish
- .396" panel projection
- Available solid, full vent perforated or center vent perforated
- Net-free ventilation area per square foot:
 - Full vent: 5.8 square inches
 - Center vent: 1.9 square inches

COLOR AVAILABILITY

	DS SOLID	D5 FULL VENT	T4 SOLID	T4 FULL VENT	T4 CENTER VENT
STANDARD COLORS					
White					
Champagne					
Sandstone					
Silver					
PREMIUM COLORS					
Sierra					
Granite					

Colors are mechanically reproduced.
For color accuracy, please see actual product sample.



Builder Double 5" Solid - White

AVAILABLE IN 5 PROFILES:

- Double 5" Solid
- Double 5" Full Vent
- Triple 4" Solid
- Triple 4" Full Vent
- Triple 4" Center Vent

.036"

Natural Brushed Finish



DOUBLE 5" SOLID

DOUBLE 5" FULL VENT

TRIPLE 4" SOLID

TRIPLE 4" FULL VENT

TRIPLE 4" CENTER VENT


All profiles are intended for soffit use only.

Builder D5 Solid - White


Siding & Soffit Accessories





Deluxe Crown Moulding
12' 6" long
14 pieces per carton
175 linear feet per carton

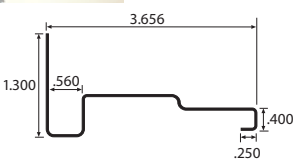


3/4" & 1-1/4" Inside Corner Post
10' long
10 pieces per carton
100 linear feet per carton

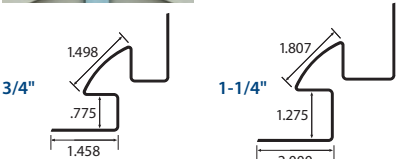



5" Double Channel Lineal
18' long
10 pieces per carton
180 linear feet per carton





Utility Trim
12' 6" long
40 pieces per carton
500 linear feet per carton




Dual Utility Trim
12' 6" long
12 pieces per carton
150 linear feet per carton



45° Bay Outside Corner Post
10' long
3/4" receiving pocket
10 pieces per carton
100 linear feet per carton




3/4" Window & Door Casing
12' 6" long
20 pieces per carton
250 linear feet per carton




1/2" & 3/4" F Channel
12' 6" long
24 pieces per carton
300 linear feet per carton





Drip Cap
12' long
40 pieces per carton
480 linear feet per carton



1/2" & 3/4" H-Trim
12' 6" long
10 pieces per carton
125 linear feet per carton



Soffit Cove Moulding
12' 6" long
20 pieces per carton
250 linear feet per carton



Starter Strip
12' 6" long
50 pieces per carton
625 linear feet per carton




Starter Strip (for Polar Wall Plus)


12' 6" long
24 pieces per carton
300 linear feet per carton



3-1/2" Universal Outside Corner Post
10' long
3/4" receiving pocket
10 pieces per carton
100 linear feet per carton



3-1/2" Universal Outside Corner Post
12' long
3/4" receiving pocket
10 pieces per carton
120 linear feet per carton




3-1/2" Outside Corner Post with Foam
12' long
1-1/4" receiving pocket
10 pieces per carton
120 linear feet per carton

With foam for added rigidity & energy efficiency




3/8" J Channel
12' 6" long
48 pieces per carton
600 linear feet per carton






1/2", 5/8" & 3/4" J Channel

12' 6" long
40 pieces per carton
500 linear feet per carton




1-1/4" J Channel

12' 6" long
24 pieces per carton
300 linear feet per carton



3/4" Flexible J Channel
12' 6" long
20 pieces per carton
250 linear feet per carton




Wide Corner/Window and Door Surround Systems *See pages 32-33 for color availability*




Surround Starter
12' 6" long
24 pieces per carton
300 linear feet per carton




5-1/2" Fluted Outside Corner Post with Foam
20' long
3/4" receiving pocket
6 pieces per carton
120 linear feet per carton

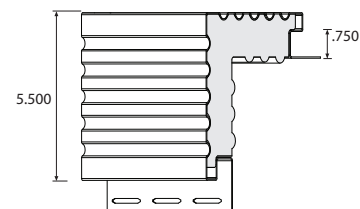


6" Traditional Outside Corner Post with Foam
20' long
3/4" receiving pocket
6 pieces per carton
120 linear feet per carton

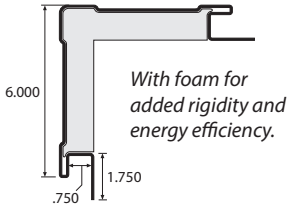


5-1/2" Outside Corner Post with Foam
20' long
1-1/4" receiving pocket
6 pieces per carton
120 linear feet per carton

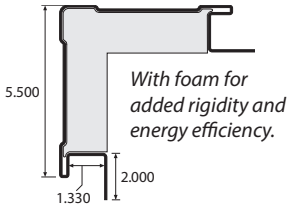

Beaded Corner Insert
20' long
10 pieces per carton
200 linear feet per carton



Flat Lineal Surround
20' long
10 pieces per carton
200 linear feet per carton

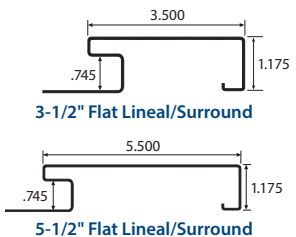

Vinyl Siding & Soffit Color Availability

[illegible]

Vinyl Accessories Color Availability

[illegible]



NailRIGHT™

SIDING INSTALLATION SYSTEM


The “X” appears every 8" on the nailing hem as a guide to help determine location of hidden wall studs.

Your professional installation crew takes every possible precaution to make sure your new siding looks and performs its best.

They use the Norandex proprietary NailRIGHT™ Siding Installation System to help them locate and precisely nail into the framing studs. This is a very important detail because misapplied nails can cause siding to buckle, blow off in windy conditions, or be hazardous if they strike wiring or plumbing located between the studs.

NailRIGHT helps ensure an accurate and safe installation. It securely connects the siding to the wall for optimum performance. This means the beautiful siding you select will not only stand out, but will stay up, even in extreme weather conditions.

AVOID:

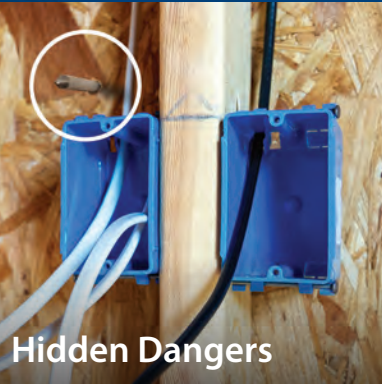

Nails that miss their mark can be potentially hazardous to items, like wiring and plumbing, located in the cavities between studs.



NailRIGHT helps guide the installer to the studs for an installation that’s strong and secure, resisting blow offs.



NailRIGHT assures the proper amount of nails are used, saving your home from unnecessary hammer hits.

Products will resist major color changes in a variety of climates, based on two-year outdoor weathering studies. Where not defined in ASTM D-3679, ASTM D-4477, ASTM D-7254, and D-7793, our products also meet the stringent quality control standards of Norandex.

Product Test Data

- Impact Resistance Mean Failure Energy >60 in. lb.
- Surface Distortion None at 120°F
- Length Within - 1/4" of specification
- Warp/Camber <1/8"
- Coefficient of Linear Expansion (in/in/°F) <4.5 x 10⁻⁵

Fire Resistance

All vinyl siding, soffit and accessories listed in this catalog have a Class A flame spread classification per 2012 IBC.

- ASTM E-84:
- Flame Spread Index ≤25
- Smoke Developed Index >450

For more information, obtain a brochure on the fire properties of siding by contacting the Vinyl Siding Institute at www.vinylsiding.org.

Relevant Codes and Regulations Compliance[†]

- ASTM D-3679, ASTM D-7254, ASTM D-4477, ASTM D-7793
- Florida Building Code Approval FL-12500, FL-12505
- Intertek Code Compliance Research Report #CCRR-0184
- PEPA/Intertek PCL-0801, PCL-0802, PCL-0804, PER-0803

[†]Not all products listed on this page comply with these codes, please see individual Certificates of Conformance for actual product specifications.



Complement Your New Siding With Other Quality Exterior Products



The quality of your home matters to us, which is why we provide a range of high-quality products beyond just siding to enhance and safeguard your home. Whether you need entry doors, energy-efficient windows, soffit, trim or metals, you can be assured that you have chosen reliable, top-performing products to complete your home.



VINYL SIDING, SOFFIT & ACCESSORIES

1-800-528-0942

www.norandex.com