



BUTYL Stretch Flex

To guarantee air and wind-tightness for the skin of a construction it must have the appropriate foils or panel materials providing a permanent seal at overlaps, gaps, joints and penetration points. BUTYL Dehn-flex - Stretch Flex is used particularly as a seal at penetrations points for wind seals, vapour barriers, roof underlays and OSB. Due to its great flexibility the tape can easily be positioned around the openings that require sealing and neatly pressed down. Its extremely good adhesive properties permit work on a variety of substrates mostly without a primer.

FIELD OF APPLICATION

- For trouble-free seals at penetration points such:
rafters, outlet vents, electrical ducts

ADVANTAGES

- high elasticity
- a tape for all penetrations

AVAILABLE IN THE FOLLOWING DIMENSIONS

Roll width	50 mm	80 mm	100 mm
Roll length	10 m	10 m	10 m
Carton contents/rolls	6	4	4

PRODUCT DATA

Composition	Highly flexible butyl rubber tape, adhesive on one side		
Thickness	2 mm		
Working temperature	+ 5 °C - + 40 °C		
Temperature resistance	- 40 °C - + 100 °C		
Expandability	300 %		
Storability	2 years; cool and dry		





PROCESSING GUIDELINES

BUTYL Stretch Flex

The materials used must be free from dust and grease and substrates must be dry and supporting. The greater the pressure applied, the better the performance of the adhesive tape. BUTYL Stretch Flex has the function of sealant and not of a strong connector. Optimum adhesion to the substrate is achieved in combination with BUBI LF Bonding Primer or UNI Primer.

Butyl and bitumen tapes have a high inherent weight.

The tape must be mechanically secured in case of installation in projecting areas e.g. ceilings, cantilevers and soffit areas, where gravity acts directly on the tape.

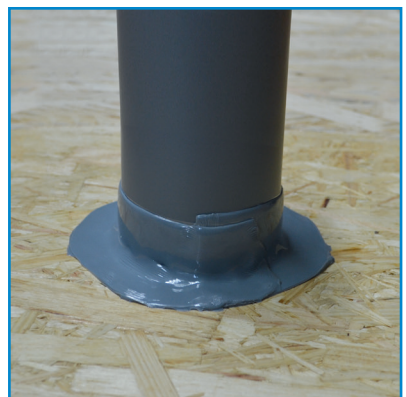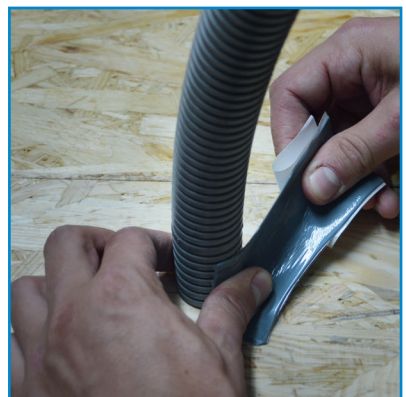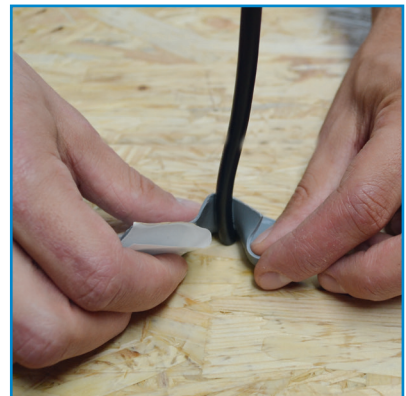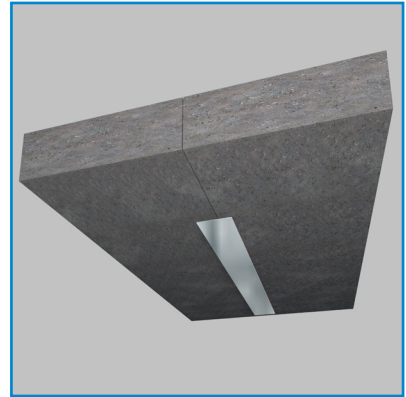

ISOCELL GmbH
Gewerbstraße 9
5202 NEUMARKT AM WALLERSEE | Österreich
Tel.: +43 6216 4108 | Fax: +43 6216 7979
office@isocell.at

ISOCELL SCHWEIZ AG
Herbergstrasse 29
9524 ZUZWIL | Suisse /Schweiz
Tel.: +41 71 544 47 20
office@isocell.ch

ISOCELL FRANCE
170 Rue Jean Monnet | ZAC de Prat Pip Sud
29490 GUIPAVAS | France
Tél.: +33 2 98 42 11 00 | Fax: +33 2 98 42 11 99
contact@isocell-france.fr

ISOCELL BUREEL BELGIË
Außenborner Weg 1 | Schoppen
4770 AMEL | Belgique
Tel.: +32 80 39 90 58 | Fax: +32 80 39 97 68
office@isocell.be

ISOCELL Sverige AB
Gamla Stallet | Stora Väsbys
194 37 UPPLANDS VÄSBY | Sverige
Tel.: +46 10 130 25 01
office@isocell.se

ISOCELL
www.isocell.com