



JL-INT-4FT-M40 | JL-INT-8FT-M72

LED T8 INTEGRATED TUBE LIGHT (SEAMLESS)

DESCRIPTION

T8 INTEGRATED TUBE | 4ft/8ft | Wattage Selectable | CCT Selectable | Seamless | Linkable & Plug and Play



CONSTRUCTION

PC + Aluminum | T8 Integrated LED Tubes Seamless

ELECTRICAL

Runs on 120-277V line voltage

LINKABLE

The ability to link multiple tube lights together allows you to customize the lighting arrangement to suit your space perfectly, providing uniform lighting across larger areas.

EASY INSTALLATION

The T8 LED Integrated Tube light doesn't need a ballast fixture, making setup easy. Just connect the provided connector and secure the fixture with the included clips and screws. This simple installation saves on maintenance and costs

LONGEVITY

LED lighting is known for its extended lifespan, reducing the need for frequent replacements and minimizing maintenance efforts.

APPLICATIONS

From residential spaces to commercial establishments, these tube lights find utility in a wide range of settings, including homes, offices, retail stores, garage, workshops, basement and more.

LISTING

ETL, DLC, FCC

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours.

FEATURES

Bulb Type	T8 LED
Size	4FT 8FT
Wattage	4FT: 22W/30W/40W(Selectable) 8FT: 45W/60W/72W(Selectable)
CCT	3500K/4000K/5000K/ 5700K/6500K (Selectable)
Efficiency	125lm/W
Input Voltage	120-277V AC
Frequency Range	50/60Hz
Linkable	Yes
Cover	Frosted / Clear
CRI	>80
PF	>0.95
THD	<=20%
Beam Angle	120°
IP Rating	IP 40
Lifetime	50,000 hours



JL-INT-4FT-M40 | JL-INT-8FT-M72

LED T8 INTEGRATED TUBE LIGHT (SEAMLESS)


ORDERING INFORMATION

Model	Size	Wattage	Voltage	Lumens	Efficacy	CCT	Certifications
JL-INT-4FT-M40W-XXK	4FT	22W, 30W, 40W (Selectable)	120-277V	2750lm, 3750lm, 5000lm	125 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	ETL/DLC
JL-INT-8FT-M72W-XXK	8FT	45W, 60W, 72W (Selectable)	120-277V	5625lm, 7500lm, 9000lm	125 lm/W	3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	ETL/DLC


PHYSICAL SPECIFICATIONS

Unit: mm/inch

4FT

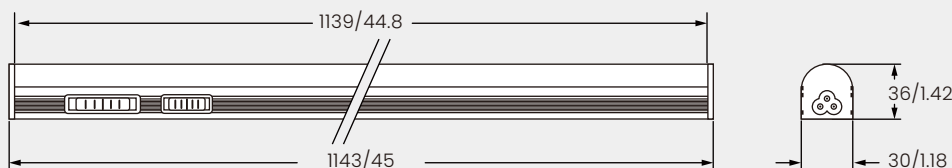


8FT

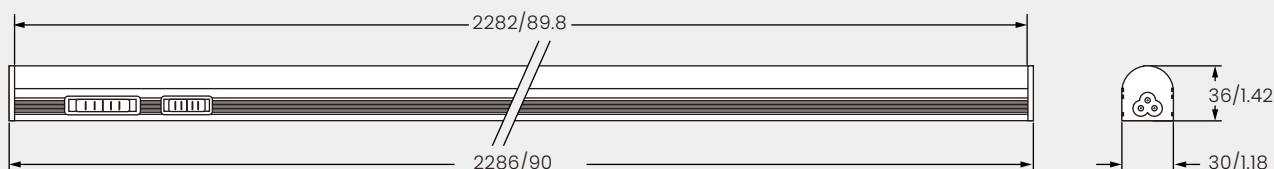

Dimensional tolerances: (+1.5mm, -1.0mm)

WATTAGE & CCT SELECTION

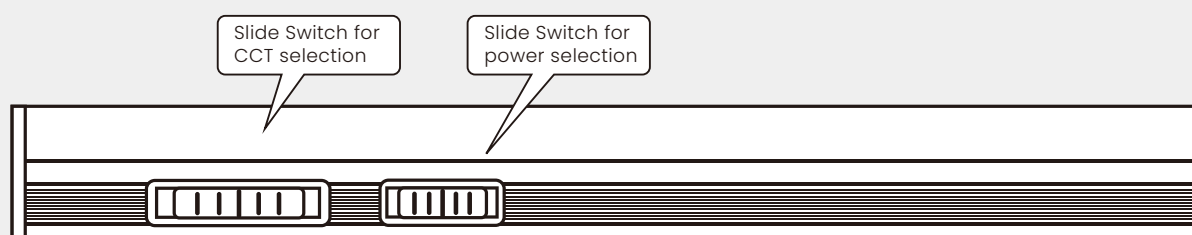

For the product with Slide Switch of wattage or CCT selection, please select the wattage or CCT needed before installation.




JL-INT-4FT-M40 | JL-INT-8FT-M72

LED T8 INTEGRATED TUBE LIGHT (SEAMLESS)


INSTALLATION INSTRUCTIONS

1

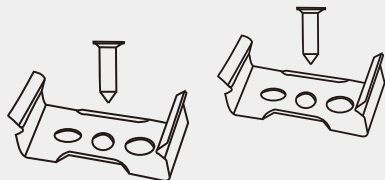


Confirm the buckle's position on the wall.

2



Screw the buckles on the wall.


3

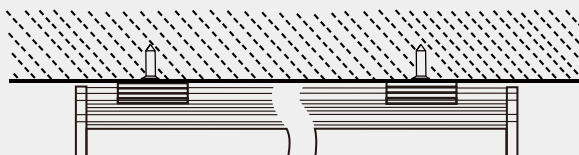


Fix the light into the buckles

CONNECTION INSTALLATION

Method 1: Connector

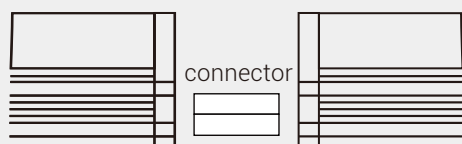


Please find the connector in the accessories bag.

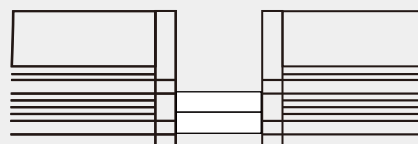

Plug the connector into the tube.

Method 2: Middle Connector

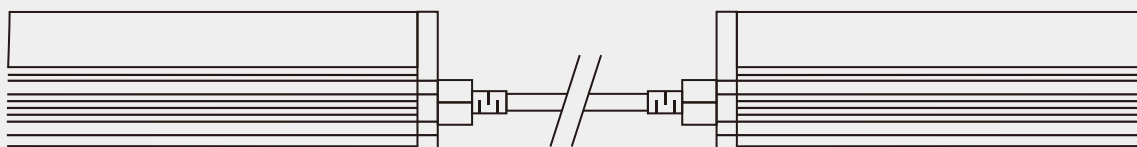

Please find the middle connector, Plug the middle connector into the tube.