

Residential Power Vent Gas Water Heater

The TTW® Models Feature:



Photo is of
RG1PV50S6N

FEATURING:



- **Powerful Blower Motor**—Exclusively featuring the AquaVENT MAX™ from Fasco™ is the quietest blower motor in the industry. This new blower is a lower profile than previous versions and features a more robust electrical connection.
 - 10 Foot (3m) Power Cord—Included (120 VAC).
- **Horizontal and Vertical Venting**—Designed for installations where atmospheric units cannot be used. Exhaust gases are vented under positive pressure directly out of the building through the roof or the wall with PVC, ABS or CPVC (Maximum equivalent vent length on reverse side).
- **High Altitude Ready**—Water Heaters designed and certified for installations up to 10,100 feet (3078m) out of the box. No conversion kit required.
- **Bradford White ICON System®**—Intelligent gas control with spark to pilot ignition system eliminates the constant burning pilot. This results in savings of pilot gas during standby periods (120 VAC).
 - Enhanced Performance**—Proprietary algorithms provide enhanced First Hour Rating and tighter temperature differential.
 - Advanced Temperature Control System**—Microprocessor constantly monitors and controls burner operation to maintain consistent and accurate water temperature levels.
 - Intelligent Diagnostics**—An exclusive green LED light prompts the installer during start-up and provides ten different diagnostic codes to assist in troubleshooting.
 - Pilot On Indication**—Flashing green LED provides positive indication that pilot is on.
 - Separate Immersed Thermowell**—High-strength advanced polymer composite thermowell provides isolation between electric temperature sensor and surrounding water. No need to drain the tank when removing gas valve.
- **Advanced ScreenLok® Technology Flame Arrestor Design**—Flame arrestor is designed to prevent ignition of flammable vapor outside of the water heater (excluding RG1PV55H6N & RG2PV75H6N).
- **Flammable Vapor Sensor**—Electronic sensor prevents burner operation if flammable vapors are detected. The sensor will also prevent operation if there is ongoing flammable vapors burning inside the combustion chamber (excluding RG1PV55H6N & RG2PV75H6N).
- **Maintenance-Free**—No regular cleaning of air inlet openings or flame arrestor is required under normal conditions (excluding RG1PV55H6N & RG2PV75H6N).
- **Sight Window**—Offers a view into the combustion chamber to observe the operation of the pilot and burner.
- **Vitrage® Lining with Microban®**—An exclusively engineered enamel formula that provides superior tank protection from the corrosive effects of water; and with Microban® antimicrobial product protection to help prevent the growth of bacteria, mold and mildew on the surface of the tank lining.
- **Factory-Installed Hydrojet® Total Performance System**—Sediment reducing device that also increases first hour rating of hot water while minimizing temperature build-up in tank.
- **Insulation System**—Non-CFC foam covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Water Connections**—3/4" (19mm) NPT factory-installed true dielectric fittings extend water heater life and simplify water line connections.
- **3/4" (19mm) NPT Side Connections**—(RG2PV50H6N, RG1PV55H6N, and RG2PV75H6N only).
- **Factory-Installed Heat Traps**—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation.
- **Protective Anode Rod**—(RG1PV55H6N has 2).
- **T&P Relief Valve**—Installed.
- **Thermostatic Mixing Valve (ASSE Approved)**—Included (RG1PV55H6N only).
- **Low Restrictive Brass Drain Valve**—Durable tamper proof design.
- **NOx Emissions**—Less than 40 ng/J.



6 or 10-Year Limited Tank Warranties / 6 or 10-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

Microban® antimicrobial product protection helps prevent the growth of bacteria, mold and mildew that may affect the product. The built-in antimicrobial properties do not protect users or others from disease-causing organisms. Microban® is a registered trademark of Microban Products Company.

Residential Power Vent Gas Water Heater

TTW® Power Vent Models "19 Series"

NATURAL GAS AND LIQUID PROPANE GAS

Model Number	Rated Nominal Volume U.S. Gal. Imp. Gal.	DOE Rated Storage Volume Gal.	BTU/Hr. Input LP BTU/Hr. Input	First Hour Rating Gal.	Uniform Energy Factor	Recovery at 90°F Rise* U.S. GPH Imp. GPH LP U.S. GPH LP Imp. GPH	Model Number	Rated Nominal Volume Liters	DOE Rated Storage Volume Liters	kW Input LP kW Input	First Hour Rating Liters	Uniform Energy Factor	Recovery at 50°C Rise* Liters/Hour LP Liters/Hour
RG1PV40S6N	40 33	38	40,000 38,000	75	0.68	43 36 41 34	RG1PV40S6N	151	144	11.7 11.1	284	0.68	163 155
RG1PV50S6N	50 42	48	40,000 38,000	78	0.69	44 37 42 35	RG1PV50S6N	189	182	11.7 11.1	295	0.69	167 159
RG2PV40S6N	40 33	38	40,000 38,000	75	0.72	44 36 41 35	RG2PV40S6N	151	144	11.7 11.1	284	0.72	165 157
RG2PV50S6N	50 42	48	40,000 38,000	78	0.72	44 37 44 37	RG2PV50S6N	189	182	11.7 11.1	295	0.72	167 167
RG2PV40T6N	40 33	38	40,000 40,000	78	0.72	43 35 40 34	RG2PV40T6N	151	144	11.7 11.7	295	0.72	161 153
RG2PV50T6N	50 42	48	40,000 40,000	75	0.72	44 36 44 36	RG2PV50T6N	189	182	11.7 11.7	284	0.72	165 165
RG2PV50H6N	48 42	46	65,000 58,000	116	0.68	70 58 62 52	RG2PV50H6N	182	174	19.1 17.0	440	0.68	265 235
RG1PV55H6N	55 46	55	78,000 76,000	116	0.68	84 70 82 68	RG1PV55H6N	208	208	22.9 22.3	440	0.68	318 309
RG2PV75H6N	75 62	72	76,000 75,500	121	0.69	82 68 81 67	RG2PV75H6N	284	235	22.3 22.1	459	0.69	310 307

Model Number	A Floor to Top of Blower in.	B Jacket Dia. in.	C Vent Size in.	D Floor to T&P Conn. in.	E Floor to Gas Conn. in.	F Floor to Top of Heater in.	G Floor to Water Conn. in.	H Depth in.	J C/L of Water Conn. in.	K Floor to Space Heating Inlet in.	L Floor to Space Heating Outlet in.	M Water Conn. NPT in.	R Space Heating Conn. Size in.	S Gas Conn. Size in.	Approx. Shipping Weight lbs.
RG1PV40S6N	55 ⁷ / ₁₆	20	2 or 3	40	11 ¹ / ₂	46 ¹ / ₂	49	25 ¹⁵ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	140
RG1PV50S6N	56 ³ / ₈	22	2 or 3	40 ⁵ / ₈	11 ¹ / ₂	48 ³ / ₁₆	50 ¹ / ₂	27 ³ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	166
RG2PV40S6N	55 ⁷ / ₁₆	22	2 or 3	40 ¹ / ₈	11 ¹ / ₂	47 ³ / ₁₆	49	27 ³ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	142
RG2PV50S6N	56 ⁷ / ₁₆	24	2 or 3	40 ⁵ / ₈	11 ¹ / ₂	48 ³ / ₁₆	50 ¹ / ₂	28 ⁷ / ₈	8	N/A	N/A	3/4	N/A	1/2	168
RG2PV40T6N	65	20	2 or 3	49 ¹¹ / ₁₆	11 ¹ / ₂	56 ³ / ₄	58	26 ¹ / ₈	8	N/A	N/A	3/4	N/A	1/2	146
RG2PV50T6N	65 ¹ / ₁₆	22	2 or 3	50 ⁹ / ₁₆	11 ¹ / ₂	57 ⁹ / ₁₆	58	27 ³ / ₁₆	8	N/A	N/A	3/4	N/A	1/2	173
RG2PV50H6N	64 ⁷ / ₁₆	22	3 or 4	49 ⁷ / ₈	11 ¹ / ₂	56 ³ / ₄	57 ³ / ₄	26 ¹⁵ / ₁₆	11	13 ³ / ₈	49 ⁷ / ₈	3/4	3/4	1/2	187
RG1PV55H6N	62 ¹ / ₂	22	3 or 4	47 ¹⁵ / ₁₆	11 ¹ / ₂	54 ³ / ₄	56	27 ³ / ₁₆	7 ³ / ₄	13 ³ / ₈	47 ¹⁵ / ₁₆	3/4	3/4	1/2	219
RG2PV75H6N	67 ⁷ / ₁₆	26	3 or 4	51 ¹⁵ / ₁₆	13 ¹⁵ / ₁₆	59 ¹¹ / ₁₆	60 ³ / ₄	30 ¹¹ / ₁₆	11	16 ¹¹ / ₁₆	51 ¹⁵ / ₁₆	3/4	3/4	1/2	260

Model Number	A Floor to Top of Blower mm.	B Jacket Dia. mm.	C Vent Size mm.	D Floor to T&P Conn. mm.	E Floor to Gas Conn. mm.	F Floor to Top of Heater mm.	G Floor to Water Conn. mm.	H Depth mm.	J C/L of Water Conn. mm.	K Floor to Space Heating Inlet mm.	L Floor to Space Heating Outlet mm.	M Water Conn. NPT mm.	R Space Heating Conn. Size mm.	S Gas Conn. Size mm.	Approx. Shipping Weight kg.
RG1PV40S6N	1408	508	51 or 76	1016	292	1181	1245	659	203	N/A	N/A	19	N/A	13	64
RG1PV50S6N	1432	559	51 or 76	1032	292	1224	1283	691	203	N/A	N/A	19	N/A	13	75
RG2PV40S6N	1408	559	51 or 76	1019	292	1199	1245	691	203	N/A	N/A	19	N/A	13	64
RG2PV50S6N	1408	610	51 or 76	1032	292	1244	1283	733	203	N/A	N/A	19	N/A	13	76
RG2PV40T6N	1651	508	51 or 76	1262	292	1441	1473	664	203	N/A	N/A	19	N/A	13	66
RG2PV50T6N	1672	559	51 or 76	1284	292	1462	1473	691	203	N/A	N/A	19	N/A	13	78
RG2PV50H6N	1637	559	76 or 102	1267	292	1441	1467	684	279	340	1267	19	19	13	85
RG1PV55H6N	1588	559	76 or 102	1218	292	1391	1422	691	197	340	1218	19	19	13	99
RG2PV75H6N	1713	660	76 or 102	1319	354	1516	1543	779	279	424	1319	19	19	13	118



Propane models feature a Titanium Stainless Steel propane burner. For Propane (LP) models change suffix "N" to "X". For 10 year models, change suffix from "6" to "10" (Not available on RG1PV55H6N). *Based on manufacturer's rated recovery efficiency. 120 VAC Required for Power Venting / 120 VAC, 60Hz., 3.1 Amperes. Uniform Energy Factor and First Hour Rating is based on the latest AHRI directory listings.

RG2PV40S6N RG2PV50S6N RG1PV40S6N				RG1PV50S6N RG2PV40T6N RG2PV50T6N		2" (51mm) Vent Pipe		3" (76mm) Vent Pipe		4" (102mm) Vent Pipe		RG2PV50H6N RG1PV55H6N RG2PV75H6N				3" (76mm) Vent Pipe		4" (102mm) Vent Pipe			
Max. Equivalent Length						†50 ft. †15.2m		†120 ft. †36.6m		†200 ft. †61.0m		Max. Equivalent Length						†75 ft. †23.0m		†180 ft. †55.0m	
Min. Equivalent Length						7 ft. 2.1m		15 ft. 4.6m		15 ft. 4.6m		Min. Equivalent Length						7 ft. 2.1m		15 ft. 4.6m	
Number						1 45 ft. 13.7m		115 ft. 35.0m		195 ft. 59.4m		Number						1 70 ft. 21.3m		175 ft. 53.3m	
of						2 40 ft. 12.2m		110 ft. 33.5m		190 ft. 58.0m		of						2 65 ft. 20.0m		170 ft. 52.0m	
90° Elbows						3 35 ft. 10.7m		105 ft. 32.0m		185 ft. 56.4m		90° Elbows						3 60 ft. 18.3		165 ft. 50.3m	

Subtract 5ft. (1.5m) for each additional 90° elbow
† For high altitude installations, consult the installation instructions.

General: Meets NAECA or EPACT Requirements, as applicable. All gas water heaters are certified at 300 PSI (2068 kPa) test pressure and 150 PSI (1034 kPa) working pressure. All water connections are 3/4" (19mm) NPT, all gas connections are 1/2" (13mm). All models design-certified by CSA International (formerly AGA/CGA) to ANSI standard Z21.10.1.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. Suitable for Water (Potable) Heating and Space Heating. Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into this system. This unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.

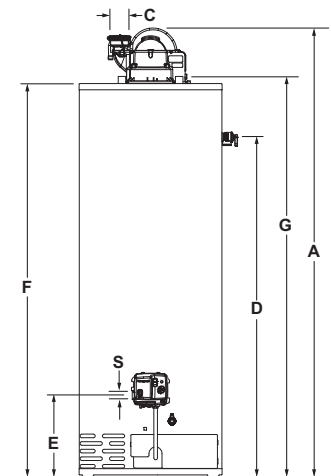

— BRADFORD WHITE IS —

**AMERICAN
STRONG**

Sales: 800-523-2931 ■ Fax 215-641-1612

24/7 Technical Support: 800-334-3393 ■ Email techserv@bradfordwhite.com

Products made by Bradford White are manufactured in the United States using the finest raw materials and components from around the world.

Built to be the Best®