

# H1056

## TELEHANDLER



**HIGH PERFORMANCE:** 10,000 lb. lift capacity, 56' 1" max height, and 42' outreach for demanding tasks.

**ENHANCED MANEUVERABILITY:** Three steering modes, including four-wheel and crab steer, allow operators to easily navigate tight job sites.

**BUILT FOR ROUGH TERRAIN:** With four-wheel drive and industry-standard **Dana® limited slip axles**, the LGMG H1056 excels in uneven and demanding terrains.

**BUILT TOUGH:** Durable steel engine cover comes **STANDARD**.

**QUICK TRANSIT:** Cummins® 74 HP (120 HP optional) engine with a 15.5 mph travel speed to save time on-site.

**OPERATOR-FRIENDLY DESIGN:** The ergonomic cab features intuitive controls, multiple load chart placements for quick reference, and a spacious layout to reduce operator fatigue.



### STANDARD

- 74hp Cummins® engine
- 9 inch display with onboard diagnostics
- Aux hydraulic connectors
- Backup alarm
- Dana® limited slip axles
- Foam filled tires
- Level indicator
- Lifting hook
- ROPS/FOPS open cab
- Telematics ready
- ZF® Powershift transmission (4 fwd/3 rev)

### ATTACHMENTS

- 48" block forks
- 48", 60", 72" fork carriage
- 48", 60", 72" pallet forks
- 60" lumber forks
- Material bucket
- Side tilt carriage
- Swing carriage

### OPTIONS

- 120 HP Cummins® engine
- Block heater
- Boom work light
- Brick guard
- Cab worklights
- Rear view camera
- Road lights
- ROPS/FOPS enclosed cab (with heat and AC)
- Solid tires
- Telematics



LGMG NA provides an industry-leading 5-year/5,000 hour warranty on new boom lifts, scissor lifts, and vertical mast lifts, and a 3-year/3,000 hour warranty on new telehandlers with an option to purchase an extended warranty upon request.


Terms and conditions apply. Subject to LGMG's warranty policies then in effect. Please visit [www.lgmgna.com/warranty](http://www.lgmgna.com/warranty) for details.

# H1056


## TELEHANDLER




	Imperial	Metric
Max. Lifting Height	56'1"	17.1 m
Max. Outreach	42'	12.8 m
Ⓐ Overall Length	21'7"	6.57 m
Ⓑ Overall Width	7'11"	2.41 m
Ⓒ Overall Height	8'10"	2.7 m
Ⓓ Wheelbase	11'6"	3.5 m
Ground Clearance	1'4"	0.4 m
<b>PRODUCTIVITY</b>		
Max. Capacity	10,000 lb	4,535 kg
Gradeability-Unladen	50%	
Min. Turning Radius	14'1"	4.3 m
Chassis Tilt	±10°	
Drive / Steering Modes	4WD with 4 Wheel Steer/2 Wheel Steer/Crab Steer	
Primary Boom Raise/Lower Time	20 s / 15 s	
Boom Extending / Retracting Time	25 s / 20 s	
Max. Travel Speed	15.5 mph	25 km/h
Brakes	Multi-disc SAHR wet brake	
Standard Foam Filled Tires	400/75-28	
<b>POWER</b>		
Power Source	Cummins QSF 3.8L T4f/Stage V	
Rated Power	74 hp	55 kW
Max. Torque	295 lb-ft	400 Nm
Engine Displacement	232 cu.in	3.8 L
Fuel Tank Capacity	38.3 gal	145 L
<b>HYDRAULIC SYSTEM</b>		
Function Pump Displacement	63 cc/r	
Hydraulic Tank Capacity	37 gal	140 L
<b>WEIGHT</b>		
Machine Weight	33,730 lb	15,300 kg

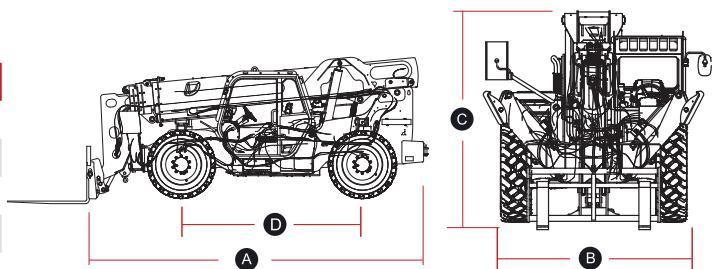

Load Chart - Outriggers Up

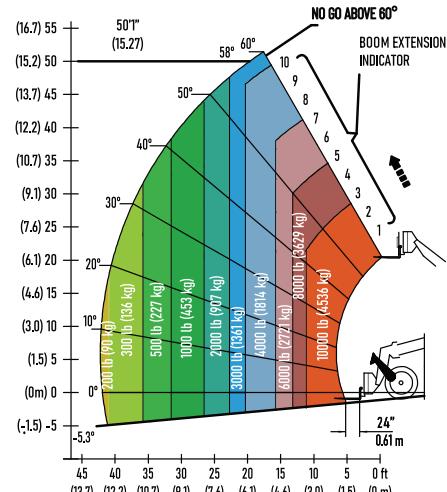

Load Chart - Outriggers Down

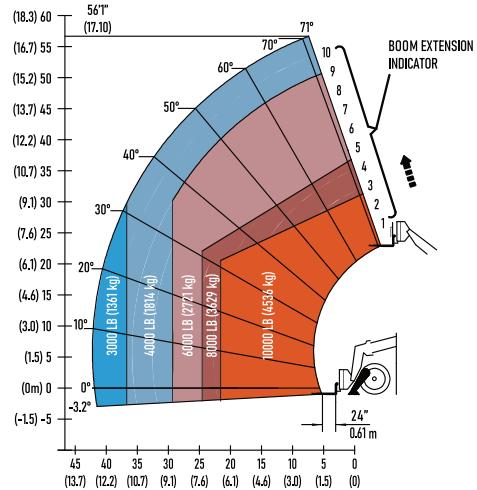

ANSI B56.6, CSA 335-15

Please contact LGMG for more details. LGMG reserves the right to change technical data without prior notice.

All photos and pictures in this brochure are for promotional purposes only.

This brochure comes into effect in December, 2025.

**LGMG North America Inc.**

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
Email: sales@lmgmna.com Tel: +1 833 288 5464

[www.lmgmna.com](http://www.lmgmna.com)

