

M2030SE

VERTICAL MAST LIFT



COMPACT DESIGN: At 55 inches in overall length and 30 inches in overall width, the M2030SE is engineered to fit through tight spaces and operate efficiently in confined environments.

LEAK CONTAINMENT SYSTEM: Comes **STANDARD**.

SERVICE ACCESS: The double doors provide wider access for maintenance.

MORE ACCESS: **STANDARD** extension deck with 352 lb capacity.

PERFECT FIT: for confined spaces such as data centers, warehouses, and hospitals.



POWER

Charging protection system
Maintenance-free AGM batteries

PLATFORM

AC power to platform
Cup holder and tool tray
Emergency stop button
Proportional control
Platform load sense system

CHASSIS

Descent alarm
Emergency descent
Emergency stop button
Flashing beacon
Front wheel brakes
Front wheel steering, front wheel drive
Horn
Hour meter
Leak containment system
Manual brake release
Motion alarm
Pothole protection
Solid non-marking tires
Telematics ready
Tilt alarm

OPTIONS

Platform tool box
Telematics



LGMG NA provides an industry-leading 5-year/5,000 hour warranty on new boom lifts, scissor lifts, and vertical mast lifts, and a 3-year/3,000 hour warranty on new telehandlers with an option to purchase an extended warranty upon request.



Terms and conditions apply. Subject to LGMG's warranty policies then in effect. Please visit www.lgmgna.com/warranty for details.

M2030SE

VERTICAL MAST LIFT



	Imperial	Metric
Work Height Max.	25'8"/21'9" (in/out)	8/6.8 m (in/out)
Platform Height(Raised)	19'8"/15'9" (in/out)	6/4.8 m (in/out)
Platform Size	31" x 30"	0.79 x 0.75 m
A Overall Length	4'7"	1.4 m
B Overall Width	2'6"	0.76 m
C Overall Height (Stowed)	6'6"	1.99 m
D Extension Deck	1'8"	0.5 m
E Wheelbase	3'7"	1.08 m
F Ground Clearance (Stowed)	2"	55 mm
PRODUCTIVITY		
Max. Platform Occupancy	1(in) / 1(out)	
Platform Capacity	352 lb	160 kg
Platform Capacity - Extension	352 lb	160 kg
Drive Mode	Front wheel drive	
Brakes	Front wheel brakes	
Max Allowable Tilt Fore-Aft/Side-to-Side	3° / 1.5°	
Outside Turning Radius	64 in	1.62 m
Inside Turning Radius	15 in	0.39 m
Max. Drive Height	Full Height	
Drive Speed (Stowed)	1.9mph	3 km/h
Drive Speed (Raised)	0.5mph	0.8 km/h
Gradeability	25%	
Solid Non-Marking Tire Size	12"x4"	305x100 mm
Tire Contact Pressure	123 psi	850 kPa
Occupied Floor Pressure	225 psf	10.8 kPa
POWER		
Power Source	24V (2x12V), 100Ah, AGM	
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	1.3 gal	5 L
WEIGHT		
Machine Weight	2,579 lb	1,170 kg

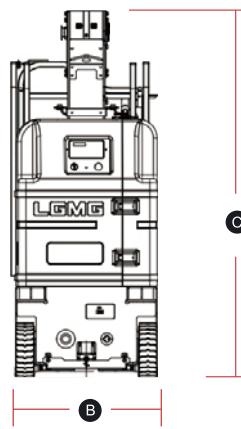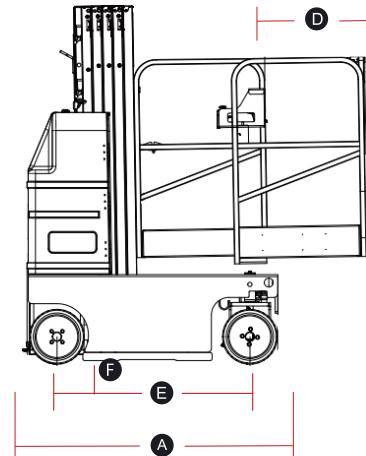

ANSI A92.20, CSA B354.6
Please contact LGMG for more details. LGMG reserves the right to change technical data without prior notice.
All photos and pictures in this brochure are for promotional purposes only.
This brochure comes into effect in December, 2025.

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lgmgna.com Tel: +1 833 288 5464

www.lgmgna.com

