

# M2530SE

## VERTICAL MAST LIFT



**COMPACT DESIGN:** At 57 inches in overall length and 31 inches in overall width, the M2530SE is engineered to fit through tight spaces and operate efficiently in confined environments.

**LEAK CONTAINMENT SYSTEM:** Comes **STANDARD**.

**SERVICE ACCESS:** The double doors provide wider access for maintenance.

**MORE ACCESS:** **STANDARD** extension deck with 352 lb capacity.

**PERFECT FIT:** for confined spaces such as data centers, warehouses, and hospitals.



### POWER

Charging protection system  
Maintenance-free AGM batteries

### PLATFORM

AC power to platform  
Cup holder and tool tray  
Emergency stop button  
Proportional control  
Platform load sense system

### CHASSIS

Descent alarm  
Emergency descent  
Emergency stop button  
Flashing beacon  
Front wheel brakes  
Front wheel steering, front wheel drive  
Horn  
Hour meter  
Leak containment system  
Manual brake release  
Motion alarm  
Pothole protection  
Solid non-marking tires  
Telematics ready  
Tilt alarm

### OPTIONS

Platform tool box  
Telematics



LGMG NA provides an industry-leading 5-year/5,000 hour warranty on new boom lifts, scissor lifts, and vertical mast lifts, and a 3-year/3,000 hour warranty on new telehandlers with an option to purchase an extended warranty upon request.



Terms and conditions apply. Subject to LGMG's warranty policies then in effect. Please visit [www.lgmgna.com/warranty](http://www.lgmgna.com/warranty) for details.

# M2530SE

## VERTICAL MAST LIFT



	Imperial	Metric
Work Height Max.	30'7"/25'8" (in/out)	9.5 / 8 m (in/out)
Platform Height(Raised)	24'7"/19'8" (in/out)	7.5 / 6 m (in/out)
Platform Size	31" x 30"	0.79 x 0.75 m
A Overall Length	4'9"	1.45 m
B Overall Width	2'7"	0.8 m
C Overall Height (Stowed)	6'6"	1.99 m
D Extension Deck	1'8"	0.5 m
E Wheelbase	3'8"	1.13 m
F Ground Clearance (Stowed)	2"	55 mm
<b>PRODUCTIVITY</b>		
Max. Platform Occupancy	1(in) / 1(out)	
Platform Capacity	352 lb	160 kg
Platform Capacity - Extension	352 lb	160 kg
Drive Mode	Front wheel drive	
Brakes	Front wheel brakes	
Max Allowable Tilt Fore-Aft/Side-to-Side	3° / 1.5°	
Outside Turning Radius	65 in	1.67 m
Inside Turning Radius	16 in	0.41 m
Max. Drive Height	Full Height	
Drive Speed (Stowed)	1.9mph	3 km/h
Drive Speed (Raised)	0.5mph	0.8 km/h
Gradeability	25%	
Solid Non-Marking Tire Size	12"x4"	305x100 mm
Tire Contact Pressure	125 psi	860 kPa
Occupied Floor Pressure	274 psf	13.1 kPa
<b>POWER</b>		
Power Source	24V (2x12V), 100Ah, AGM	
<b>HYDRAULIC SYSTEM</b>		
Hydraulic Oil Volume	1.3 gal	5 L
<b>WEIGHT</b>		
Machine Weight	3,329 lb	1,510 kg

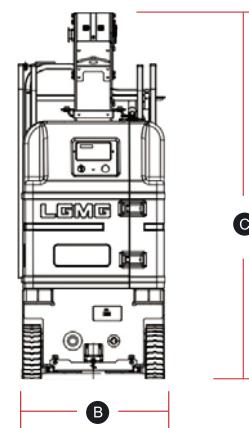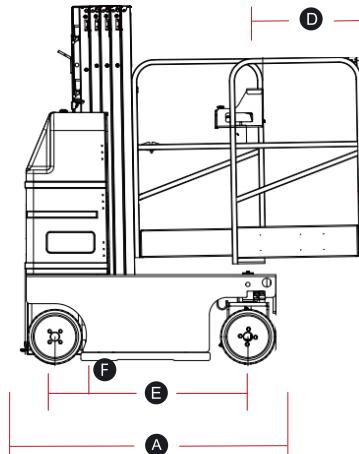

ANSI A92.20, CSA B354.6  
Please contact LGMG for more details. LGMG reserves the right to change technical data without prior notice.  
All photos and pictures in this brochure are for promotional purposes only.  
This brochure comes into effect in December, 2025.

### LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States  
Email: sales@lgmgn.com Tel: +1 833 288 5464

[www.lgmgn.com](http://www.lgmgn.com)

