

SR3369E

RT ELECTRIC SCISSOR LIFT



LARGE WORK PLATFORM with an extension deck and a 4 person indoor/ 2 person outdoor capacity for increased productivity.

NO EMISSIONS AND LOW NOISE from a **48V battery pack** for indoor and urban environments with stricter requirements.

SMOOTH, RESPONSIVE CONTROLS, powered by LGMG's proprietary software, deliver better handling and reduced bounce and lag.

SERVICE AND MAINTENANCE ARE SIMPLER with an onboard self-diagnosis system and easy access to all service items with a pullout tray.

HEAVIER GAUGE METAL AND PROTECTIVE SHEATHING on most exposed hydraulic hoses for a more robust machine comes **STANDARD**.

Standard self-leveling outriggers.



POWER

48V system with 315Ah FLA batteries

PLATFORM

- AC power to platform
- Descent alarm
- Emergency stop button
- Flashing beacons
- Horn
- Motion alarm
- Overload sensing system
- Proportional control
- Swing gate

CHASSIS

- Automatic braking system
- Auto-leveling outriggers
- Emergency descent
- Emergency stop button
- Foldable guardrail
- Hour meter
- Intelligent diagnostic system
- Manual brake release
- Oscillating axle
- Over-tilt protection system
- Pullout component tray
- RT foam-filled non-marking tires
- Safety chock for service
- Standard forklift pockets for transport
- Telematics ready

OPTIONS

- Cold weather package
- RT foam-filled tires
- RT solid non-marking tires
- RT solid tires
- Telematics



LGMG NA provides an industry-leading 5-year/5,000 hour warranty on new boom lifts, scissor lifts, and vertical mast lifts, and a 3-year/3,000 hour warranty on new telehandlers with an option to purchase an extended warranty upon request.

Terms and conditions apply. Subject to LGMG's warranty policies then in effect. Please visit www.lgmgna.com/warranty for details.

SR3369E

RT ELECTRIC SCISSOR LIFT




	Imperial	Metric
Work Height Max.	37'10"	11.7 m
A Platform Height-Raised	31'10"	9.7 m
B Platform Height - Stowed	4'8"	1.41 m
C Platform Length	9'2"	2.79 m
D Platform Width	5'3"	1.6 m
E Overall Length with Outriggers	12'4"	3.76 m
F Overall Width	5'10"	1.79 m
G Overall Height - Rails up	8'4"	2.55 m
Overall Height - Rails down	6'2"	1.89 m
H Extension Deck	5'	1.52 m
I Wheelbase	7'6"	2.29 m
Ground Clearance-Center	9"	0.23 m
PRODUCTIVITY		
Max. Platform Occupancy	4(in) / 2(out)	
Platform Capacity	1,000 lb	454 kg
Platform Capacity - Extension	310 lb	140 kg
Max allowable tilt (fore/aft and side-to-side)	3° / 2°	
Drive speed (stowed)	3.8 mph	6.1 km/h
Drive speed (raised)	0.31 mph	0.5 km/h
Drive Height	Full Height	
Gradeability - Stowed	35%	
Outside Turning Radius	13' 1.5"	4 m
Inside Turning Radius	6' 11"	2.1 m
Raise/Lower Time	39 / 46 s	
Brakes	Four-Wheel Brakes	
Drive Mode	4x2	
Standard Tires	RT foam-filled non-marking 26"x11"	
Tire Contact Pressure	76 psi	526 kPa
Occupied Floor Pressure	183 psf	8.75 kPa
POWER		
Power Source	48V (8 x 6V) 315Ah, FLA	
HYDRAULIC SYSTEM		
Hydraulic Oil Volume	18.5 gal	70 L
WEIGHT		
Machine Weight (with outriggers)	8,690 lb	3,950 kg

ANSI A92.20, CSA B354.6

Please contact LGMG for more details. LGMG reserves the right to change technical data without prior notice.

All photos and pictures in this brochure are for promotional purposes only.

This brochure comes into effect in December, 2025.

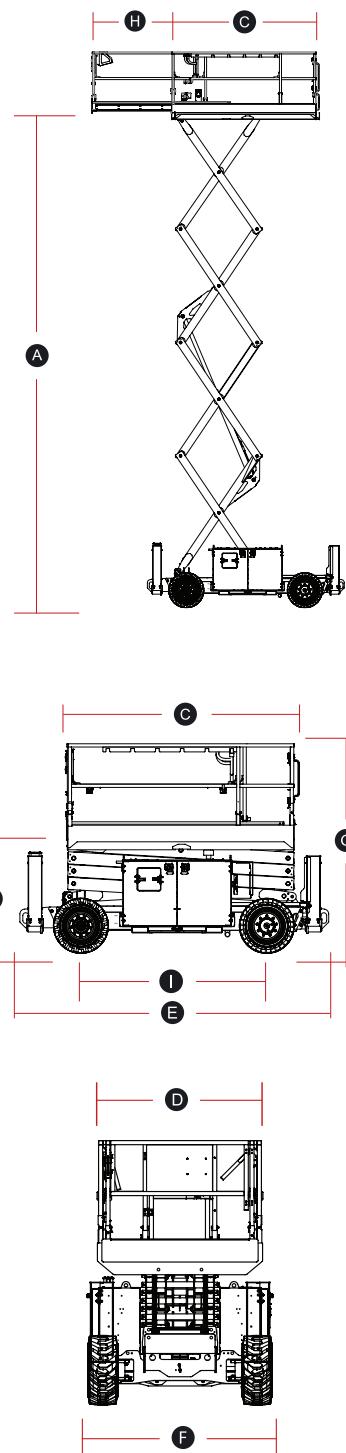

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States
Email: sales@lmgmna.com Tel: +1 833 288 5464

www.lmgmna.com

