

SR4390D

RT SCISSOR LIFT



SMOOTH, RESPONSIVE CONTROLS, powered by LGMG's proprietary software, deliver better handling and reduced bounce and lag.

LARGE WORK PLATFORM with dual extension decks and a 7 person capacity for increased productivity.

GREAT TRACTION and power from a **48hp Kubota® engine**, oscillating axle, and four wheel drive to traverse jobsites with poor underfoot conditions.

SERVICE AND MAINTENANCE ARE SIMPLER with an onboard self-diagnosis system and easy access to all service items with a pullout engine tray.

HEAVIER GAUGE METAL AND PROTECTIVE SHEATHING on most exposed hydraulic hoses for a more robust machine comes **STANDARD**.

Standard self-leveling outriggers.



POWER

Kubota V2403 36kW/48hp

PLATFORM

AC power to platform
Descent alarm
Emergency stop button
Flashing beacons
Horn
Motion alarm
Overload sensing system
Proportional control
Swing gate

CHASSIS

Automatic braking system
Auto-leveling outriggers
Emergency descent
Emergency stop button
Foldable guardrail
Hour meter
Intelligent diagnostic system
Manual brake release
Oscillating axle
Over-tilt protection system
Pullout component tray
RT foam-filled tires
Safety chock for service
Standard forklift pockets for transport
Telematics ready

OPTIONS

Cold weather package
Material carrier
Pipe rack
QuickFit for oil changes
RT foam-filled non-marking tires
RT solid tires
RT solid non-marking tires
Telematics



LGMG NA provides an industry-leading 5-year/5,000 hour warranty on new boom lifts, scissor lifts, and vertical mast lifts, and a 3-year/3,000 hour warranty on new telehandlers with an option to purchase an extended warranty upon request.

Terms and conditions apply. Subject to LGMG's warranty policies then in effect. Please visit www.lgmgna.com/warranty for details.

SR4390D

RT SCISSOR LIFT



	Imperial	Metric
Work Height Max.	48'8"	15 m
A Platform Height-Raised	42'8"	13 m
B Platform Height - Stowed	6'	1.83 m
C Platform Length	13'1"	3.98 m
D Platform Width	6'	1.83 m
E Overall Length with Outriggers	16'1"	4.9 m
F Overall Width	7'7"	2.3 m
G Overall Height - Rails up	9'	2.96 m
Overall Height - Rails down	7'6"	2.28 m
H Extension Deck (front/rear)	4'9"/3'9"	1.45/1.14 m
I Wheelbase	9'4"	2.85 m
Ground Clearance-Center	9"	0.23 m

PRODUCTIVITY

Max. Platform Occupancy	7(in) / 7(out)	
Platform Capacity	1,500 lb	680 kg
Platform Capacity - Extension	510 lb	230 kg
Max allowable tilt (fore/aft and side-to-side)	3° / 2°	
Drive speed (stowed)	3.8 mph	6.1 km/h
Drive speed (raised)	0.68 mph	1.1 km/h
Drive Height	Full Height	
Gradeability - Stowed	40%	
Outside Turning Radius	17' 7"	5.35 m
Inside Turning Radius	9'	2.74 m
Raise/Lower Time	55/ 55 s	
Brakes	Four-Wheel Brakes	
Drive Mode	4x4	
Standard Tires	Solid 33"x11"	
Tire Contact Pressure	129 psi	888 kPa
Occupied Floor Pressure	200 psf	9.55 kPa

POWER




Power Source	Kubota V2403 36kW/48hp	
Fuel Tank Capacity	26.4 gal	100 L

HYDRAULIC SYSTEM

Hydraulic Oil Volume	37 gal	140 L
----------------------	--------	-------

WEIGHT

Machine Weight (with outriggers)	16,230 lb	7,360 kg
----------------------------------	-----------	----------

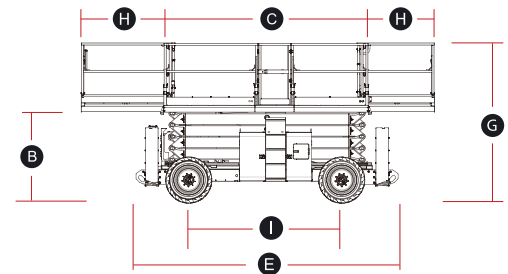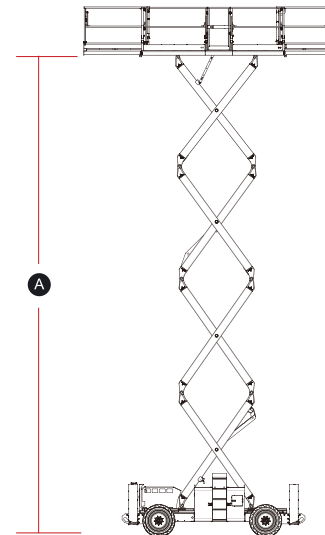

ANSI A92.20, CSA B354.6

Please contact LGMG for more details. LGMG reserves the right to change technical data without prior notice.

All photos and pictures in this brochure are for promotional purposes only.

This brochure comes into effect in December, 2025.

LGMG North America Inc.

Address: 4105 Live Oak Drive, Suite 100, The Colony, Texas 75056 United States

Email: sales@lmgna.com Tel: +1 833 288 5464

www.lmgna.com

