



COMPASAL 

BEYOND EXPECTATION

TO PROVIDE MORE HIGH-QUALITY PRODUCTS AND SERVICES
FOR THE VEHICLE USERS AROUND THE WORLD



PCR

01/02 **ROADWEAR**



03/04 **GRANDECO**



05/08 **SPORTCROSS(PCR/RFT)**



09/10 **BLAZER UHP**



11/12 **SMACHER**

SUV

13/14 **CITIWALKER**



15/16 **VERSANT AT**



17/18 **VERSANT MT**



19/20 **VERSANT MT II**



COMMERCIAL

21/22 **VANMAX**



23/24 **COMMAX I**



25/26 **COMMAX II**



WINTER&AS

27/28 **ICEBLAZER I**



29/30 **ICEBLAZER II**



31/32 **ICE BLAZER STUD**



33/34 **SN-3**



35/36 **CROSSTOP 4S**



TRAILER

37/38 **TRAILER STAR**





Unique pattern design:

- 1. Accurate calculation of the design pattern pieces.
- 2. Widening the tread design, with a central longitudinal groove straight rib pattern.
- 3. The most advanced computing software variable pitch tread optimal rehearsal.
- 4. PCR special tread compound.

Excellent performance:

- 1. Provide optimized tread handling, wet skid resistance.
- 2. Holding strong, directional precision, handling, braking drive good.
- 3. To achieve a quiet and comfortable ride.
- 4. High-speed, slippery, rolling resistance, noise, the best performance combination.



Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
155/65R13	73	T	-	4.50B	300/44	532	157	7.6	420AA	E	C	68	BSW
155/70R13	75	T	-	4.50B	300/44	548	157	7.6	420AA	E	C	68	BSW
155/80R13	79	T	-	4.50B	300/44	578	157	7.6	420AB	E	C	68	BSW
165/65R13	77	T	-	5.00B	300/44	544	170	7.0	420AA	E	C	68	BSW
165/70R13	79	T	-	5.00B	300/44	562	170	6.8	420AA	E	C	68	BSW
175/70R13	82	T	-	5.00B	300/44	576	177	7.0	420AA	E	C	68	BSW
175/60R13	77	H	-	5.00B	300/44	540	177	7.0	420AA	E	C	68	BSW
155/65R14	75	H	-	4 1/2J	300/44	558	157	7.1	420AA	E	C	68	BSW
165/60R14	75	H	-	5J	300/44	554	170	6.8	420AA	E	C	68	BSW
165/65R14	79	H	-	5J	300/44	570	170	6.8	420AA	E	C	68	BSW
165/70R14	81	H	-	5J	300/44	588	170	6.8	420AA	E	C	68	BSW
175/65R14	82	H	-	5J	300/44	584	177	7.0	420AA	E	C	68	BSW
175/70R14	84	H	-	5J	300/44	602	177	7.0	420AA	E	C	68	BSW
185/55R14	80	H	-	6J	300/44	560	194	7.0	420AA	E	C	68	BSW
185/60R14	82	H	-	5 1/2J	300/44	578	189	7.3	420AA	E	C	68	BSW
185/65R14	86	H	-	5 1/2J	300/44	596	189	7.3	420AA	E	C	68	BSW
185/70R14	88	H	-	5 1/2J	300/44	616	189	7.3	420AA	E	C	69	BSW
165/70R14	85 XL	T	-	5J	340/50	588	170	6.8	420AA	E	C	69	BSW
175/65R14	86 XL	T	-	5J	340/50	584	177	7.0	420AA	E	C	69	BSW
175/70R14	88 XL	T	-	5J	340/50	602	177	7.0	420AA	E	C	68	BSW
175/60R15	81	H	-	5J	300/44	591	177	7.0	500AA	E	C	68	BSW
175/65R15	84	H	-	5J	300/44	609	177	7.1	500AA	E	C	68	BSW
185/55R15	82	V	-	6J	300/44	585	194	7.0	500AA	E	C	68	BSW
185/60R15	84	H	-	5 1/2J	300/44	603	189	7.3	500AA	E	C	68	BSW
185/65R15	88	H	-	5 1/2J	300/44	621	189	7.3	500AA	E	C	69	BSW
195/60R15	88	H	-	6J	300/44	615	201	7.3	500AA	E	C	69	BSW
195/65R15	91	V	-	6J	300/44	635	201	7.3	500AA	E	C	69	BSW
205/60R15	91	V	-	6J	300/44	627	209	7.8	500AA	E	C	69	BSW
205/65R15	94	V	-	6J	300/44	647	209	7.6	500AA	E	C	70	BSW
215/65R15	96	H	-	6 1/2J	300/44	661	221	7.8	500AA	E	C	69	BSW
185/60R15	88 XL	H	-	5 1/2J	340/50	603	189	7.3	500AA	E	C	69	BSW
185/65R15	92 XL	T	-	5 1/2J	340/50	621	189	7.3	500AA	E	C	69	BSW
195/60R15	88	V	-	6J	300/44	615	201	7.1	500AA	E	C	69	BSW
195/65R15	95 XL	H	-	6J	340/50	635	201	7.3	500AA	E	C	69	BSW
205/65R15	94	H	-	6J	300/44	647	209	7.8	500AA	E	C	69	BSW
205/55R16	91	V	-	6 1/2J	300/44	632	214	7.6	500AA	E	C	69	BSW
205/60R16	92	V	-	6J	300/44	652	209	7.8	500AA	E	C	69	BSW
205/65R16	95	H	-	6J	300/44	672	209	7.8	500AA	E	C	70	BSW
215/60R16	95	V	-	6 1/2J	300/44	664	221	7.8	500AA	E	C	70	BSW
215/65R16	98	H	-	6 1/2J	300/44	686	221	7.8	500AA	E	C	70	BSW
225/60R16	98	H	-	6 1/2J	300/44	676	228	7.8	500AA	E	C	70	BSW
225/65R16	100	H	-	6 1/2J	300/44	698	228	7.8	500AA	E	C	70	BSW
235/60R16	100	H	-	7J	300/44	688	240	7.8	500AA	E	C	69	BSW
205/60R16	96 XL	H	-	6J	340/50	652	209	7.8	500AA	E	C	70	BSW
215/60R16	99 XL	H	-	6 1/2J	340/50	664	221	7.8	500AA	E	C	70	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. Accurate calculation of the design pattern pieces.
- 2. Widening the tread design, with a central longitudinal groove straight rib pattern.
- 3. The most advanced computing software variable pitch tread optimal rehearsal.
- 4. PCR special tread compound.

Excellent performance:

- 1. Provide optimized tread handling, wet skid resistance.
- 2. Holding strong, directional precision, handling, braking drive good.
- 3. To achieve a quiet and comfortable ride.
- 4. High-speed, slippery, rolling resistance, noise, the best performance combination.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
145/70R12	69	T	-	4.50B	300/44	509	150	7.1	420AA	E	C	68	BSW
155/70R12	73	T	-	4.50B	300/44	523	157	7.1	420AA	E	C	68	BSW
165/70R12	77	T	-	5.00B	300/44	537	167	6.9	420AA	E	C	68	BSW
155/65R13	73	T	-	4.50B	300/44	532	157	7.1	420AA	E	C	68	BSW
155/70R13	75	T	-	4.50B	300/44	548	157	7.5	420AA	E	C	69	BSW
165/65R13	77	T	-	5.00B	300/44	544	170	7.1	420AA	E	C	68	BSW
165/70R13	79	T	-	5.00B	300/44	562	170	6.9	420AA	E	C	68	BSW
175/70R13	82	T	-	5.00B	300/44	576	177	7.1	420AA	E	C	68	BSW
185/70R13	86	T	-	5.50B	300/44	590	189	7.3	420AA	E	C	68	BSW
195/60R14	86	H	-	6J	300/44	590	201	7.5	500AA	E	C	68	BSW
165/70R14	81	H	-	5J	300/44	588	170	6.9	420AA	E	C	68	BSW
175/65R14	82	H	-	5J	300/44	584	177	7.1	420AA	E	C	69	BSW
175/70R14	84	H	-	5J	300/44	602	177	7.1	420AA	E	C	69	BSW
175/60R14	79	H	-	5J	300/44	566	177	7.0	420AA	E	C	69	BSW
185/60R14	82	H	-	5 1/2J	300/44	578	189	7.3	420AA	E	C	69	BSW
185/65R14	86	H	-	5 1/2J	300/44	596	189	7.3	420AA	E	C	69	BSW
185/70R14	88	H	-	5 1/2J	300/44	616	189	7.3	420AA	E	C	69	BSW
195/70R14	91	H	-	6J	300/44	630	201	7.3	500AA	E	C	69	BSW
205/70R14	95	H	-	6J	300/44	644	209	7.8	500AA	E	C	70	BSW
175/65R15	84	H	-	5J	300/44	609	177	7.1	500AA	E	C	70	BSW
185/55R15	82	V	-	6J	300/44	585	194	7.5	500AA	E	C	70	BSW
185/60R15	84	H	-	5 1/2J	300/44	603	189	7.3	500AA	E	C	70	BSW
185/65R15	88	H	-	5 1/2J	300/44	621	189	7.3	500AA	E	C	68	BSW
195/65R15	91	H	-	6J	300/44	635	201	7.3	500AA	E	C	68	BSW
195/60R15	88	H	-	6J	300/44	615	201	7.5	500AA	E	C	68	BSW
195/65R15	91	V	-	6J	300/44	635	201	7.3	500AA	E	C	68	BSW
205/60R15	91	V	-	6J	300/44	627	209	7.8	500AA	E	C	69	BSW
205/65R15	94	H	-	6J	300/44	647	209	7.6	500AA	E	C	69	BSW
205/70R15	96	H	-	6J	300/44	669	209	7.8	500AA	E	C	69	BSW
215/60R15	94	H	-	6 1/2J	300/44	639	221	7.8	500AA	E	C	70	BSW
215/65R15	96	H	-	6 1/2J	300/44	661	221	8.0	500AA	E	C	70	BSW
215/70R15	98	H	-	6 1/2J	300/44	683	221	7.8	500AA	E	C	70	BSW
225/70R15	100	H	-	6 1/2J	300/44	697	228	7.8	500AA	E	C	70	BSW
195/60R16	89	H	-	6J	300/44	640	201	7.3	500AA	E	C	70	BSW
205/55R16	91	V	-	6 1/2J	300/44	632	214	7.5	500AA	E	C	70	BSW
205/60R16	92	V	-	6J	300/44	652	209	7.8	500AA	E	C	70	BSW
215/55R16	97 XL	W	-	7J	340/50	642	226	7.4	300AA	E	C	70	BSW
215/60R16	95	V	-	6 1/2J	300/44	664	221	7.9	500AA	E	C	70	BSW
215/65R16	98	H	-	6 1/2J	300/44	686	221	8.0	500AA	E	C	70	BSW
215/70R16	100	H	-	6 1/2J	300/44	708	221	7.8	500AA	E	C	70	BSW
225/60R16	98	H	-	6 1/2J	300/44	676	228	7.9	500AA	E	C	70	BSW
235/60R16	100	H	-	7J	300/44	688	240	8.0	500AA	E	C	70	BSW
215/55R17	98 XL	W	-	7J	340/50	668	226	7.8	300AA	E	C	70	BSW
215/55R18	99 XL	V	-	7J	340/50	693	226	7.8	300AA	E	C	70	BSW
225/55R19	103 XL	V	-	7J	340/50	731	233	7.8	300AA	E	C	70	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

SPORT CROSS(PCR)

M+S



Unique pattern design:

- 1. Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.
- 2. Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.
- 3. Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.
- 4. Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

UTQG: 300 AA 18" AND ABOVE

UTQG: 420 AA 17"



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
195/55R16	91 XL	V	-	6J	340/50	620	201	7.8	300AA	E	C	70	BSW
235/65R17	108 XL	H	-	7J	340/50	738	240	8.3	420AA	E	C	71	BSW
245/65R17	107	H	-	7J	300/44	750	248	8.3	420AA	E	C	71	BSW
255/65R17	110	H	-	7 1/2J	300/44	764	260	8.3	420AA	E	C	71	BSW
265/65R17	112	H	-	8J	300/44	776	272	8.3	420AA	E	C	71	BSW
235/50ZR17	100 XL	W	-	7 1/2J	340/50	668	245	7.0	300AA	E	C	71	BSW
255/60R17	110 XL	V	-	7 1/2J	340/50	738	260	7.8	300AA	E	C	71	BSW
255/55R18	109 XL	V	-	8J	340/50	737	265	8.3	300AA	E	C	71	BSW
255/60R18	112 XL	V	-	7 1/2J	340/50	763	260	7.8	300AA	E	C	72	BSW
255/50R19	107 XL	V	-	8J	340/50	739	265	7.8	300AA	E	C	73	BSW
255/55R19	111 XL	V	-	8J	340/50	763	265	7.8	300AA	E	C	72	BSW
275/45R20	110 XL	V	-	9J	340/50	756	273	7.8	300AA	E	C	72	BSW
275/55R20	117 XL	V	-	8 1/2J	340/50	810	284	7.8	300AA	E	C	72	BSW
265/50R20	111 XL	V	-	8 1/2J	340/50	774	277	7.8	300AA	E	C	72	BSW
275/40R20	106 XL	V	-	9 1/2J	340/50	728	278	7.8	300AA	E	C	72	BSW
275/60R20	119 XL	V	-	8J	340/50	838	279	7.8	300AA	E	C	72	BSW
285/50R20	116 XL	V	-	9J	340/50	794	297	7.8	300AA	E	C	72	BSW
295/35ZR21	107 XL	W	-	10 1/2J	340/50	739	301	7.8	300AA	E	C	72	BSW
295/40ZR21	111 XL	W	-	10 1/2J	340/50	769	301	7.8	300AA	E	C	72	BSW
265/35R22	102 XL	V	-	9 1/2J	340/50	745	271	7.8	300AA	E	C	72	BSW
285/35R22	106 XL	V	-	10J	340/50	759	290	7.8	300AA	E	C	72	BSW
305/40R22	114 XL	V	-	11J	340/50	803	313	7.8	300AA	E	C	72	BSW
305/45R22	118 XL	V	-	10J	340/50	833	303	7.8	300AA	E	C	72	BSW
295/35R24	110 XL	V	-	10 1/2J	340/50	816	301	7.8	300AA	E	C	72	BSW
305/35R24	112 XL	V	-	11J	340/50	824	313	7.8	300AA	E	C	72	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

HP

UHP

HT

VAN

AT

MT

AS

WINTER

ST

STUDD

SPORT CROSS (RFT)

M+S



Unique pattern design:

- 1. Wide circumferential grooves help efficiently evacuate water from beneath the tread.
- 2. A special tread block sequence helps enhance handling and traction while also reducing road noise.
- 3. Premium sidewall styling offers a contemporary appearance.
- 4. RunOnFlat technology allows for driving up to 80 km/h on a deflating or deflated tire at a top speed of 90 km/h.



Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
* 195/55RF16	91 XL	W	-	6J	340/50	620	201	7.8	300AA	-	-	-	BSW
205/55RF16	94 XL	W	-	6 1/2J	340/50	632	214	7.8	300AA	-	-	-	BSW
205/45RF17	88 XL	W	-	7J	340/50	616	206	7.8	300AA	-	-	-	BSW
* 205/50RF17	93 XL	W	-	6 1/2J	340/50	638	214	7.8	300AA	-	-	-	BSW
225/45RF17	94 XL	W	-	7 1/2J	340/50	634	225	7.8	300AA	-	-	-	BSW
* 225/50RF17	98 XL	W	-	7J	340/50	658	233	7.8	300AA	-	-	-	BSW
225/40RF18	92XL	W	-	8J	340/50	637	230	7.8	300AA	-	-	-	BSW
* 245/40RF18	97XL	W	-	8 1/2J	340/50	653	248	7.8	300AA	-	-	-	BSW
* 255/35RF18	94 XL	W	-	9J	340/50	635	260	7.8	300AA	-	-	-	BSW

* New Developing Sizes



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

HP

RFT

HT

VAN

AT

MT

AS

WINTER

ST

STUDD

BLAZER UHP

M+S

Unique pattern design:

1. A streamlined and continuity of both the asymmetric tread design.
2. The difference between both sides of the shoulders rigid design.
3. Wide running surface.
4. "Rim Protector" special design.

Excellent performance:

1. High-speed straight is more stable, more comfortable ride.
2. Simultaneous driving comfort and cornering performance.
3. The steering is more stable.
4. Superior braking and braking performance.



Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
195/50R15	82	V	-	6J	300/44	577	201	7.0	300AA	E	C	70	BSW
195/55R15	85	V	-	6J	300/44	595	201	7.0	300AA	E	C	70	BSW
195/45R15	82 XL	V	-	6 1/2J	340/50	557	195	7.0	300AA	E	C	70	BSW
185/55R16	87 XL	V	-	6J	340/50	610	194	7.0	300AA	E	C	70	BSW
195/45R16	84 XL	V	-	6 1/2J	340/50	582	195	7.0	300AA	E	C	71	BSW
195/50R16	84	V	-	6J	300/44	602	201	7.0	300AA	E	C	70	BSW
195/50R16	88 XL	V	-	6J	340/50	602	201	7.0	300AA	E	C	70	BSW
195/55R16	91 XL	V	-	6J	340/50	620	201	7.0	300AA	E	C	70	BSW
205/45ZR16	87 XL	W	-	7J	340/50	590	206	7.0	300AA	E	C	70	BSW
205/50ZR16	91 XL	W	-	6 1/2J	340/50	612	214	7.0	300AA	E	C	70	BSW
205/55ZR16	94 XL	W	-	6 1/2J	340/50	632	214	7.0	300AA	E	C	70	BSW
215/55ZR16	97 XL	W	-	7J	340/50	642	226	7.0	300AA	E	C	70	BSW
225/50ZR16	92	W	-	7J	300/44	632	233	7.0	300AA	E	C	70	BSW
225/55ZR16	99 XL	W	-	7J	340/50	654	233	7.0	300AA	E	C	71	BSW
205/40ZR17	84 XL	W	-	7 1/2J	340/50	596	212	7.0	300AA	E	C	71	BSW
205/45ZR17	88 XL	W	-	7J	340/50	616	206	7.0	300AA	E	C	70	BSW
205/50ZR17	93 XL	W	-	6 1/2J	340/50	638	214	7.0	300AA	E	C	71	BSW
215/40ZR17	87 XL	W	-	7 1/2J	340/50	604	218	7.0	300AA	E	C	71	BSW
215/45ZR17	91 XL	W	-	7J	340/50	626	213	7.0	300AA	E	C	71	BSW
215/50R17	95 XL	W	-	7J	340/50	648	226	7.0	300AA	E	C	71	BSW
215/55ZR17	98 XL	W	-	7J	340/50	668	226	7.0	300AA	E	C	72	BSW
225/45ZR17	94 XL	W	-	7 1/2J	340/50	634	225	7.0	300AA	E	C	71	BSW
225/50ZR17	98 XL	W	-	7J	340/50	658	233	7.0	300AA	E	C	71	BSW
225/55ZR17	101 XL	W	-	7J	340/50	680	233	7.0	300AA	E	C	71	BSW
225/60R17	99	V	-	6 1/2J	300/44	702	228	7.8	300AA	E	C	72	BSW
235/45ZR17	97 XL	W	-	8J	340/50	644	236	7.0	300AA	E	C	71	BSW
235/55ZR17	103 XL	W	-	7 1/2J	340/50	690	245	7.0	300AA	E	C	72	BSW

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
235/65R17	82	H	-	7J	340/50	738	240	7.8	420AA	E	C	71	BSW
235/65R17	85	H	-	7J	340/50	738	240	7.8	420AA	E	C	72	BSW
235/50ZR17	82 XL	W	-	7 1/2J	340/50	668	245	7.0	300AA	E	C	72	BSW
245/45ZR17	84	W	-	8J	340/50	652	243	7.0	300AA	E	C	72	BSW
245/65R17	91 XL	H	-	7J	300/44	750	248	7.8	420AA	E	C	72	BSW
255/60R17	87 XL	V	-	7 1/2J	340/50	738	260	7.8	300AA	E	C	71	BSW
255/65R17	91 XL	H	-	7 1/2J	300/44	764	260	7.8	420AA	E	C	71	BSW
265/65R17	94 XL	H	-	8J	300/44	776	272	7.8	420AA	E	C	71	BSW
215/45ZR18	97 XL	W	-	7J	340/50	651	213	7.0	300AA	E	C	72	BSW
215/55ZR18	87 XL	W	-	7 1/2J	340/50	607	218	7.0	300AA	E	C	72	BSW
215/40ZR18	84 XL	W	-	7 1/2J	340/50	629	218	7.0	300AA	E	C	72	BSW
225/40ZR18	92	W	-	8J	340/50	637	230	7.0	300AA	E	C	71	BSW
225/45ZR18	99 XL	W	-	7 1/2J	340/50	659	225	7.0	300AA	E	C	71	BSW
235/40ZR18	88 XL	W	-	8 1/2J	340/50	645	241	7.0	300AA	E	C	71	BSW
235/45ZR18	88 XL	W	-	8J	340/50	669	236	7.0	300AA	E	C	71	BSW
235/50ZR18	93 XL	W	-	7 1/2J	340/50	693	245	7.0	300AA	E	C	71	BSW
235/60R18	91 XL	V	-	7J	340/50	739	240	7.8	300AA	E	C	72	BSW
245/45ZR18	95 XL	W	-	8J	340/50	677	243	7.0	300AA	E	C	72	BSW
245/40ZR18	94 XL	W	-	8 1/2J	340/50	653	248	7.0	300AA	E	C	72	BSW
245/50ZR18	98 XL	W	-	7 1/2J	340/50	703	253	7.0	300AA	E	C	72	BSW
255/35ZR18	101 XL	W	-	9J	340/50	635	260	7.0	300AA	E	C	72	BSW
255/40ZR18	97 XL	W	-	9J	340/50	661	260	7.0	300AA	E	C	71	BSW
255/55R18	108 XL	V	-	8J	340/50	737	265	7.8	300AA	E	C	72	BSW
255/60R18	108 XL	V	-	7 1/2J	340/50	763	260	7.8	300AA	E	C	71	BSW
255/45ZR18	110 XL	W	-	8 1/2J	340/50	687	255	7.0	300AA	E	C	71	BSW
225/35ZR19	84 XL	W	-	8J	340/50	641	230	7.0	300AA	E	C	72	BSW
225/55R19	87 XL	V	-	7J	340/50	731	233	7.0	300AA	E	C	72	BSW
235/35ZR19	98 XL	W	-	8 1/2J	340/50	647	241	7.0	300AA	E	C	71	BSW
235/55R19	99	V	-	7 1/2J	340/50	741	245	7.8	300AA	E	C	72	BSW
245/35ZR19	100 XL	W	-	8 1/2J	340/50	655	248	7.0	300AA	E	C	71	BSW
245/55R19	103 XL	V	-	7 1/2J	340/50	753	253	7.8	300AA	E	C	72	BSW
245/40ZR19	99 XL	W	-	8 1/2J	340/50	679	248	7.0	300AA	E	C	72	BSW
245/45ZR19	107	W	-	8J	340/50	703	243	7.0	300AA	E	C	72	BSW
255/50R19	110	V	-	8J	340/50	739	265	7.8	300AA	E	C	72	BSW
* 255/50ZR19	112	Y	-	8J	340/50	739	265	7.8	300AA	E	C	72	BSW
255/55R19	92 XL	V	-	8J	340/50	763	265	7.8	300AA	E	C	72	BSW
255/35ZR19	95 XL	W	-	9J	340/50	661	260	7.0	300AA	E	C	72	BSW
285/45R19	95 XL	V	-	9 1/2J	340/50	739	285	7.8	300AA	E	C	72	BSW
* 285/45ZR19	98 XL	Y	-	9 1/2J	340/50	739	285	7.8	300AA	E	C	72	BSW
225/35ZR20	101 XL	W	-	8J	340/50	666	230	7.0	300AA	E	C	72	BSW
245/35ZR20	100 XL	W	-	8 1/2J	340/50	680	248	7.0	300AA	E	C	72	BSW
245/30ZR20	107 XL	W	-	8 1/2J	340/50	656	248	7.0	300AA	E	C	72	BSW
245/45ZR20	109 XL	W	-	8J	340/50	728	243	7.0	300AA	E	C	72	BSW
255/35ZR20	84 XL	W	-	9J	340/50	686	260	7.0	300AA	E	C	72	BSW
255/45ZR20	89 XL	W	-	8 1/2J	340/50	738	255	7.0	300AA	E	C	72	BSW
265/50R20	97 XL	V	-	8 1/2J	340/50	774	277	7.8	300AA	E	C	72	BSW
275/40R20	104 XL	V	-	9 1/2J	340/50	728	278	7.8	300AA	E	C	72	BSW
* 275/40ZR20	94 XL	Y	-	9 1/2J	340/50	728	278	7.8	300AA	E	C	72	BSW
275/45R20	99 XL	V	-	9J	340/50	756	273	7.8	300AA	E	C	72	BSW
* 275/45ZR20	112 XL	Y	-	9J	340/50	756	273	7.8	300AA	E	C	72	BSW
275/30ZR20	91 XL	W	-	9 1/2J	340/50	674	278	7.8	300AA	E	C	72	BSW
275/35ZR20	93 XL	W	-	9 1/2J	340/50	700	278	7.8	300AA	E	C	72	BSW
275/55R20	107 XL	V	-	8 1/2J	340/50	810	284	7.8	300AA	E	C	72	BSW
275/60R20	111 XL	V	-	8J	340/50	838	279	7.8	300AA	E	C	72	BSW
285/50R20	105 XL	V	-	9J	340/50	794	297	7.8	300AA	E	C	72	BSW
305/35R20	107 XL	V	-	11J	340/50	722	313	7.8	300AA	E	C	72	BSW
* 305/35R20	111 XL	Y	-	11J	340/50	722	313	7.8	300AA	E	C	72	BSW
315/35R20	93 XL	V	-	11J	340/50	728	320	7.8	300AA	E	C	72	BSW
* 315/35R20	95 XL	Y	-	11J	340/50	728	320	7.8	300AA	E	C	72	BSW
295/35ZR21	106 XL	W	-	10 1/2J	340/50	739	301	7.8	300AA	E	C	72	BSW
* 295/35ZR21	110 XL	Y	-	10 1/2J	340/50	739	301	7.8	300AA	E	C	72	BSW
295/40ZR21	97 XL	W	-	10 1/2J	340/50	769	301	7.8	300AA	E	C	72	BSW
* 295/40ZR21	103 XL	Y	-	10 1/2J	340/50	769	301	7.8	300AA	E	C	72	BSW
245/30ZR22	97 XL	W	-	8 1/2J	340/50	707	248	7.0	300AA	E	C	72	BSW
255/30ZR22	105 XL	W	-	9J	340/50	713	260	7.0	300AA	E	C	72	BSW
265/35R22	97 XL	V	-	9 1/2J	340/50	745	271	7.8	300AA	E	C	72	BSW
285/35R22	102 XL	V	-	10J	340/50	759	290	7.8	300AA	E	C	72	BSW
305/40R22	111 XL	V	-	11J	340/50	803	313	7.8	300AA	E	C	72	BSW
305/45R22	117 XL	V	-	10J	340/50	833	303	7.8	300AA	E	C	72	BSW
295/35R24	119 XL	V	-	10 1/2J	340/50	816	301	7.8	300AA	E	C	72	BSW
305/35R24	116 XL	V	-	11J	340/50	824	313	7.8	300AA	E	C	72	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:


- 1. A streamlined and continuity of both the asymmetric tread design.
- 2. The difference between both sides of the shoulders rigid design.
- 3. Wide running surface.
- 4. "Rim Protector" special design.

Excellent performance:

- 1. High-speed straight is more stable, more comfortable ride.
- 2. Simultaneous driving comfort and cornering performance.
- 3. The steering is more stable.
- 4. Superior braking and braking performance.



Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
195/50R15	82	V	-	6J	300/44	577	201	7.0	300AA	E	C	70	BSW
195/55R15	85	V	-	6J	300/44	595	201	7.0	300AA	E	C	70	BSW
195/45R16	84 XL	V	-	6 1/2J	340/50	582	195	7.0	300AA	E	C	70	BSW
195/50R16	88 XL	V	-	6J	340/50	602	201	7.0	300AA	E	C	70	BSW
195/55R16	91 XL	V	-	6J	340/50	620	201	7.0	300AA	E	C	70	BSW
205/45ZR16	87 XL	W	-	7J	340/50	590	206	7.0	300AA	E	C	70	BSW
205/50ZR16	91 XL	W	-	6 1/2J	340/50	612	214	7.0	300AA	E	C	70	BSW
205/55ZR16	94 XL	W	-	6 1/2J	340/50	632	214	7.0	300AA	E	C	70	BSW
215/55ZR16	97 XL	W	-	7J	340/50	642	226	7.0	300AA	E	C	71	BSW
225/55ZR16	99 XL	W	-	7J	340/50	654	233	7.0	300AA	E	C	71	BSW
185/55R16	87 XL	V	-	6J	340/50	610	194	7.0	300AA	E	C	70	BSW
225/50ZR16	96 XL	W	-	7J	340/50	632	233	7.0	300AA	E	C	70	BSW
205/40ZR17	84 XL	W	-	7 1/2J	340/50	596	212	7.0	300AA	E	C	70	BSW
205/45ZR17	88 XL	W	-	7J	340/50	616	206	7.0	300AA	E	C	70	BSW
205/50ZR17	93 XL	W	-	6 1/2J	340/50	638	214	7.0	300AA	E	C	71	BSW
205/55ZR17	95 XL	W	-	6 1/2J	340/50	658	214	7.0	300AA	E	C	71	BSW
215/40ZR17	87 XL	W	-	7 1/2J	340/50	604	218	7.0	300AA	E	C	71	BSW
215/45ZR17	91 XL	W	-	7J	340/50	626	213	7.0	300AA	E	C	71	BSW
215/50ZR17	95 XL	W	-	7J	340/50	648	226	7.0	300AA	E	C	71	BSW
215/55ZR17	98 XL	W	-	7 1/2J	340/50	668	226	7.0	300AA	E	C	71	BSW
225/45ZR17	94 XL	W	-	7 1/2J	340/50	634	225	7.0	300AA	E	C	71	BSW
225/50ZR17	98 XL	W	-	7J	340/50	658	233	7.0	300AA	E	C	71	BSW
225/55ZR17	101 XL	W	-	7J	340/50	680	233	7.0	300AA	E	C	71	BSW
235/45ZR17	97 XL	W	-	8J	340/50	644	236	7.0	300AA	E	C	71	BSW
235/50ZR17	100 XL	W	-	7 1/2J	340/50	690	245	7.0	300AA	E	C	72	BSW
235/55ZR17	103 XL	W	-	7 1/2J	340/50	690	245	7.0	300AA	E	C	72	BSW
245/40ZR17	95 XL	W	-	8 1/2J	340/50	628	248	7.0	300AA	E	C	71	BSW
245/45ZR17	99 XL	W	-	8J	340/50	652	243	7.0	300AA	E	C	72	BSW
235/65R17	108 XL	V	-	7J	340/50	738	240	7.8	420AA	E	C	71	BSW
255/60R17	110 XL	V	-	7 1/2J	340/50	738	260	7.8	300AA	E	C	71	BSW
215/35ZR18	84 XL	W	-	7 1/2J	340/50	607	218	7.0	300AA	E	C	71	BSW
225/40ZR18	92 XL	W	-	8J	340/50	637	230	7.0	300AA	E	C	71	BSW
225/45ZR18	95 XL	W	-	7 1/2J	340/50	659	225	7.0	300AA	E	C	71	BSW
235/40ZR18	95 XL	W	-	8 1/2J	340/50	645	240	7.0	300AA	E	C	71	BSW
235/45ZR18	98 XL	W	-	8J	340/50	669	236	7.0	300AA	E	C	72	BSW
235/50ZR18	101 XL	W	-	7 1/2J	340/50	693	245	7.0	300AA	E	C	72	BSW
245/40ZR18	97 XL	W	-	8 1/2J	340/50	653	248	7.0	300AA	E	C	72	BSW
245/45ZR18	100 XL	W	-	8J	340/50	677	243	7.0	300AA	E	C	72	BSW
255/35ZR18	94 XL	W	-	9J	340/50	635	260	7.0	300AA	E	C	71	BSW
255/40ZR18	99 XL	W	-	9J	340/50	661	260	7.0	300AA	E	C	71	BSW
215/55R18	99 XL	V	-	7J	340/50	693	226	7.8	300AA	E	C	71	BSW
225/55R18	102 XL	V	-	7J	340/50	705	233	7.0	300AA	E	C	71	BSW
225/60R18	104 XL	V	-	6 1/2J	340/50	727	228	7.8	300AA	E	C	72	BSW
235/55R18	104 XL	V	-	7 1/2J	340/50	715	245	7.8	300AA	E	C	72	BSW
235/60R18	107 XL	V	-	7J	340/50	739	240	7.8	300AA	E	C	71	BSW
255/55R18	109 XL	V	-	8J	340/50	737	265	7.8	300AA	E	C	71	BSW
215/45ZR18	93 XL	W	-	7J	340/50	651	213	7.0	300AA	E	C	72	BSW
255/45ZR18	103 XL	W	-	8 1/2J	340/50	687	255	7.0	300AA	E	C	72	BSW
265/35ZR18	97 XL	W	-	9 1/2J	340/50	643	271	7.8	300AA	E	C	72	BSW
225/35ZR19	88 XL	W	-	8J	340/50	641	230	7.0	300AA	E	C	71	BSW
235/35ZR19	91 XL	W	-	8 1/2J	340/50	647	241	7.0	300AA	E	C	71	BSW
245/35ZR19	93 XL	W	-	8 1/2J	340/50	655	248	7.0	300AA	E	C	72	BSW
245/40ZR19	98 XL	W	-	8 1/2J	340/50	679	248	7.0	300AA	E	C	72	BSW
245/45ZR19	102 XL	W	-	8J	340/50	703	243	7.0	300AA	E	C	72	BSW
255/35ZR19	96 XL	W	-	9J	340/50	661	260	7.0	300AA	E	C	71	BSW
225/55R19	103 XL	V	-	7J	340/50	731	233	7.0	300AA	E	C	72	BSW
235/55R19	105 XL	V	-	7 1/2J	340/50	741	245	7.2	300AA	E	C	72	BSW
255/50R19	107 XL	V	-	8J	340/50	739	265	7.8	300AA	E	C	72	BSW
255/55R19	111 XL	V	-	8J	340/50	763	265	7.8	300AA	E	C	71	BSW
275/35ZR19	100 XL	W	-	9 1/2J	340/50	675	278	7.8	300AA	E	C	72	BSW
225/35ZR20	90 XL	W	-	8J	340/50	666	230	7.0	300AA	E	C	72	BSW
245/35ZR20	95 XL	W	-	8 1/2J	340/50	680	248	7.0	300AA	E	C	72	BSW
275/40ZR20	106 XL	W	-	9 1/2J	340/50	728	278	7.8	300AA	E	C	72	BSW
275/45ZR20	110 XL	W	-	9 1/2J	340/50	756	273	7.8	300AA	E	C	72	BSW
225/35ZR20	93 XL	W	-	8J	340/50	666	230	7.0	300AA	E	C	72	BSW

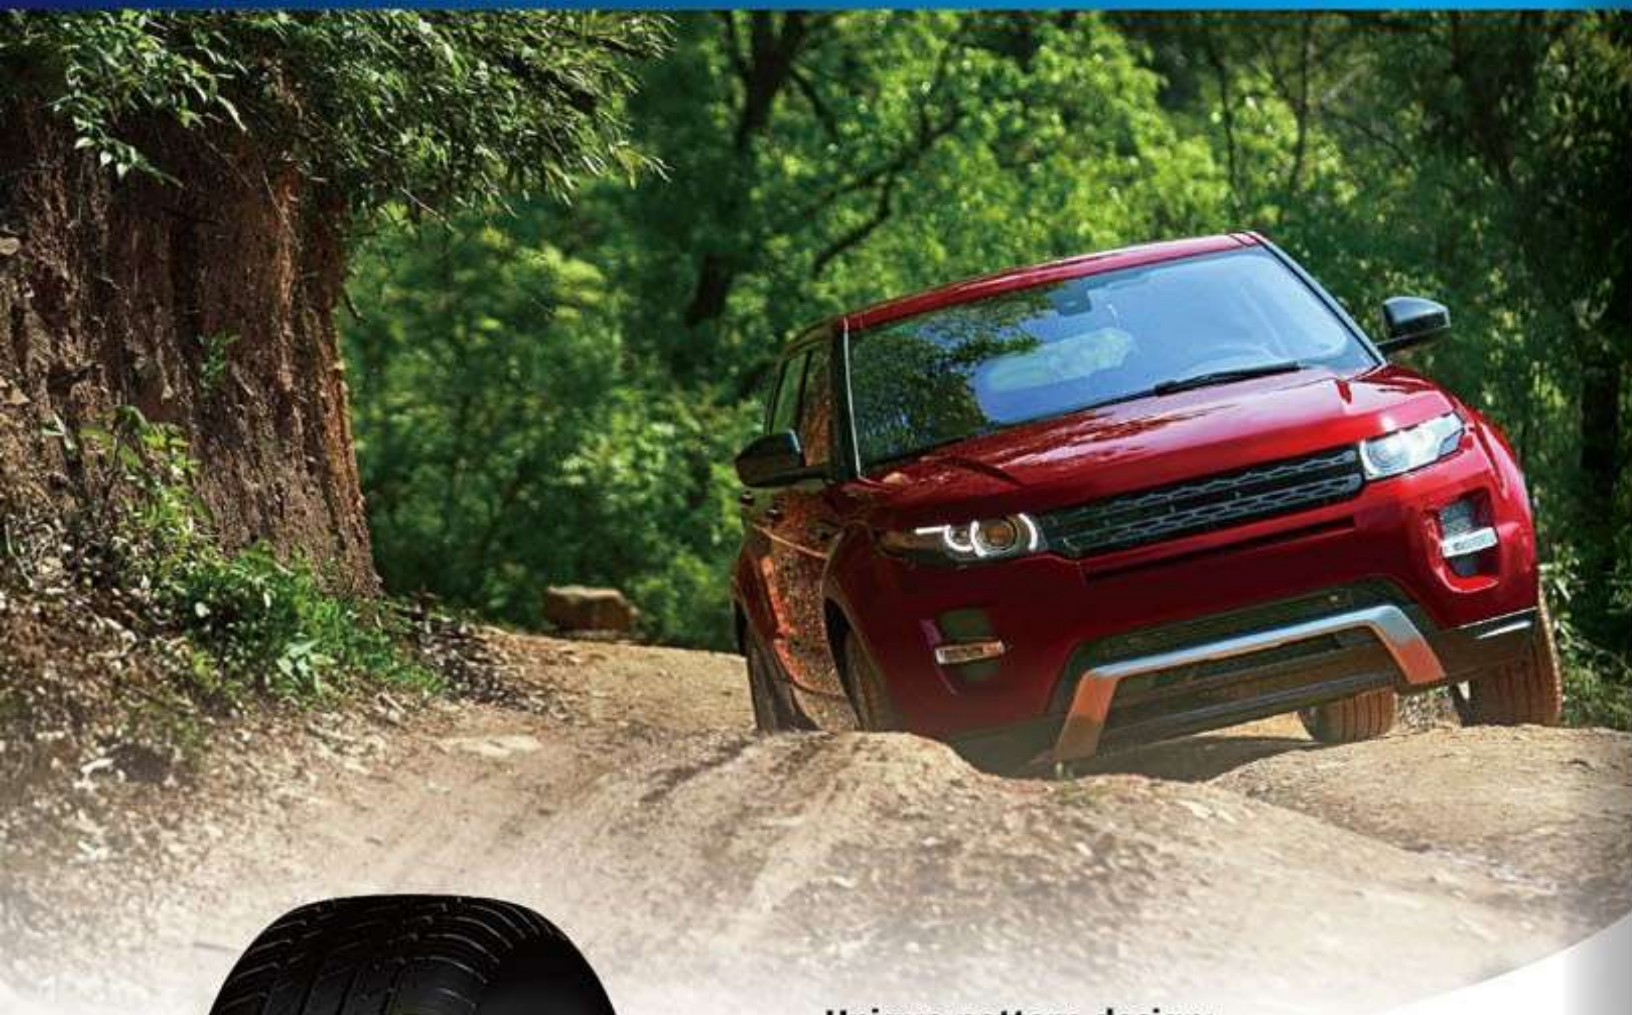

Unique pattern design:

- 1. Four straight longitudinal groove.
- 2. Streamlined staggered transverse groove, with scattered fine pattern sipes.
- 3. Super struction design.
- 4. The special formula.

Excellent performance:

- 1. To provide the necessary high-speed performance, and ensure excellent drainage properties.
- 2. Provide excellent grip performance, but also suitable for snow with.
- 3. Manipulate both reliable and durable.
- 4. To provide excellent wear resistance and high-speed performance.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
215/70R16	100	H	-	6 1/2J	300/44	708	221	8.2	420AA	E	C	72	BSW
225/70R16	103	H	-	6 1/2J	300/44	722	228	8.2	420AA	E	C	71	BSW
235/70R16	106	H	-	7J	300/44	736	240	8.2	420AA	E	C	71	BSW
245/70R16	107	H	-	7J	300/44	750	248	8.2	420AA	E	C	71	BSW
255/65R16	109	H	-	7 1/2J	300/44	738	260	8.2	420AA	E	C	71	BSW
255/70R16	111	H	-	7 1/2J	300/44	764	260	8.2	420AA	E	C	71	BSW
265/70R16	112	H	-	8J	300/44	778	272	8.2	420AA	E	C	71	BSW
275/70R16	114	H	-	8J	300/44	792	279	8.2	420AA	E	C	71	BSW
215/60R17	96	H	-	6 1/2J	300/44	690	221	8.2	420AA	E	C	71	BSW
215/65R17	99	H	-	6 1/2J	300/44	712	221	8.2	420AA	E	C	71	BSW
225/60R17	99	H	-	6 1/2J	300/44	702	228	8.2	420AA	E	C	71	BSW
225/65R17	102	H	-	6 1/2J	300/44	724	228	8.2	420AA	E	C	71	BSW
235/60R17	102	H	-	7J	300/44	714	240	8.2	420AA	E	C	71	BSW
235/65R17	104	H	-	7J	300/44	738	240	8.2	420AA	E	C	71	BSW
245/65R17	107	H	-	7J	300/44	750	248	8.2	420AA	E	C	71	BSW
255/65R17	110	H	-	7 1/2J	300/44	764	260	8.2	420AA	E	C	71	BSW
265/65R17	112	H	-	8J	300/44	776	272	8.2	420AA	E	C	71	BSW
265/70R17	115	H	-	8J	300/44	804	272	8.2	420AA	E	C	71	BSW
275/65R17	115	H	-	8J	300/44	790	279	8.2	420AA	E	C	72	BSW
285/65R17	116	H	-	8 1/2J	300/44	802	292	8.2	420AA	E	C	72	BSW
215/55R18	96	H	-	8 1/2J	300/44	693	224	8.2	420AA	E	C	72	BSW
225/55R18	98	H	-	7J	300/44	705	233	8.2	420AA	E	C	71	BSW
225/60R18	104 XL	H	-	6 1/2J	340/50	727	228	8.2	420AA	E	C	71	BSW
235/55R18	104 XL	H	-	7 1/2J	340/50	715	245	8.2	420AA	E	C	71	BSW
235/65R18	110 XL	H	-	7J	340/50	763	240	8.2	420AA	E	C	72	BSW
245/60R18	105	H	-	7J	300/44	751	248	8.2	420AA	E	C	72	BSW
255/60R18	112 XL	H	-	7 1/2J	340/50	763	260	7.8	420AA	E	C	72	BSW
255/70R18	113	H	-	7 1/2J	300/44	815	260	8.2	420AA	E	C	71	BSW
265/60R18	114 XL	H	-	8J	340/50	775	272	8.2	420AA	E	C	71	BSW
265/70R18	116	H	-	8J	300/44	829	272	8.2	420AA	E	C	71	BSW
275/65R18	116	H	-	8J	300/44	815	279	8.2	420AA	E	C	72	BSW
285/60R18	120 XL	H	-	8 1/2J	340/50	799	292	8.2	420AA	E	C	72	BSW
255/50R20	109 XL	V	-	8J	340/50	764	265	7.8	420AA	E	C	72	BSW
265/50R20	111 XL	V	-	8 1/2J	340/50	774	277	7.8	420AA	E	C	72	BSW
275/55R20	117 XL	V	-	8 1/2J	340/50	810	284	7.8	420AA	E	C	72	BSW
285/50R20	116 XL	V	-	9J	340/50	794	297	7.8	420AA	E	C	72	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. Four main zigzag grooves and rough lateral blocks provide excellent traction on all kind of road conditions.
- 2. The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.
- 3. The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.
- 4. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage




M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
215R15C	112/110	S	8PR	6J	450/65	725	218	8.7	-	-	-	-	BSW
245/75R15C	109/107	S	6PR	7J	375/55	749	248	11.2	-	-	-	-	BSW
255/70R15C	112/110	S	6PR	7 1/2J	375/55	739	260	8.2	-	-	-	-	BSW
185/75R16C	104/102	S	8PR	5J	450/65	684	184	8.1	-	-	-	-	BSW
205R16C	110/108	S	8PR	6J	450/65	736	208	8.2	-	-	-	-	BSW
LT235/75R15	104/101	S	6PR	6 1/2J	350/50	733	235	11.2	-	-	-	-	OWL
LT215/85R16	115/112	S	10PR	6J	550/80	772	216	10.9	-	-	-	-	OWL
LT225/75R16	115/112	S	10PR	6J	550/80	744	223	10.9	-	-	-	-	OWL
LT235/85R16	120/116	S	10PR	6 1/2J	550/80	806	235	11.7	-	-	-	-	BSW
LT245/75R16	120/116	S	10PR	7J	550/80	774	248	11.3	-	-	-	-	OWL
LT265/75R16	123/120	S	10PR	7 1/2J	550/80	804	267	11.7	-	-	-	-	OWL
LT285/75R16	122/119	S	8PR	8J	450/65	834	286	11.6	-	-	-	-	OWL
LT245/75R17	121/118	S	10PR	7J	550/80	800	248	11.2	-	-	-	-	BSW
LT265/70R17	121/118	S	10PR	8J	550/80	804	272	11.7	-	-	-	-	OWL
31 x 10.50R15LT	109	S	6PR	8 1/2J	350/51	775	268	11.7	-	-	-	-	OWL
P215/75R15	100	T	-	6J	300/44	703	216	8.2	400AB	-	-	-	OWL
P235/75R15	109 XL	S	-	6 1/2J	340/50	733	235	8.7	400AB	-	-	-	OWL
P215/70R16	99	T	-	6 1/2J	300/44	708	221	8.2	400AB	-	-	-	BSW
P215/70R16	100	T	-	6 1/2J	300/44	708	221	8.2	400AB	-	-	-	BSW
P225/70R16	101	T	-	6 1/2J	300/44	722	228	8.2	400AB	-	-	-	BSW
P225/70R16	103	T	-	6 1/2J	300/44	722	228	8.2	400AB	-	-	-	OWL
P235/70R16	104	T	-	7J	300/44	736	240	8.8	400AB	-	-	-	OWL
P235/70R16	106	T	-	7J	300/44	736	240	8.8	400AB	-	-	-	OWL
P245/70R16	106	T	-	7J	300/44	750	248	8.8	400AB	-	-	-	OWL
P245/70R16	111	S	-	7J	340/50	750	248	8.8	400AB	-	-	-	BSW
P245/70R16	107	T	-	7J	300/44	750	248	8.8	400AB	-	-	-	OWL
P255/70R16	109	T	-	7 1/2J	300/44	764	260	9.2	400AB	-	-	-	OWL
P255/70R16	111	T	-	7 1/2J	300/44	764	260	9.2	400AB	-	-	-	OWL
P265/70R16	111	T	-	8J	300/44	778	272	9.2	400AB	-	-	-	OWL
P265/70R16	112	T	-	8J	300/44	778	272	9.2	400AB	-	-	-	OWL
P275/70R16	114	T	-	8J	300/44	792	279	9.2	400AB	-	-	-	BSW
P235/65R17	104	T	-	7J	300/44	738	240	8.8	400AB	-	-	-	BSW
P245/65R17	107	T	-	7J	300/44	750	248	8.8	400AB	-	-	-	BSW
P255/65R17	110	T	-	7 1/2J	300/44	764	260	8.7	400AB	-	-	-	BSW
P265/65R17	110	T	-	8J	300/44	776	272	8.7	400AB	-	-	-	OWL
P265/70R17	113	T	-	8J	300/44	804	272	9.2	400AB	-	-	-	OWL
P265/65R17	112	T	-	8J	300/44	776	272	8.7	400AB	-	-	-	OWL
P265/70R17	115	T	-	8J	300/44	804	272	9.0	400AB	-	-	-	OWL
P275/65R17	115	T	-	8J	300/44	790	279	9.2	400AB	-	-	-	BSW
P275/55R20	117 XL	T	-	8 1/2J	340/50	810	284	8.7	500AB	-	-	-	BSW
P275/60R20	119 XL	T	-	8J	340/50	838	279	8.7	500AB	-	-	-	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

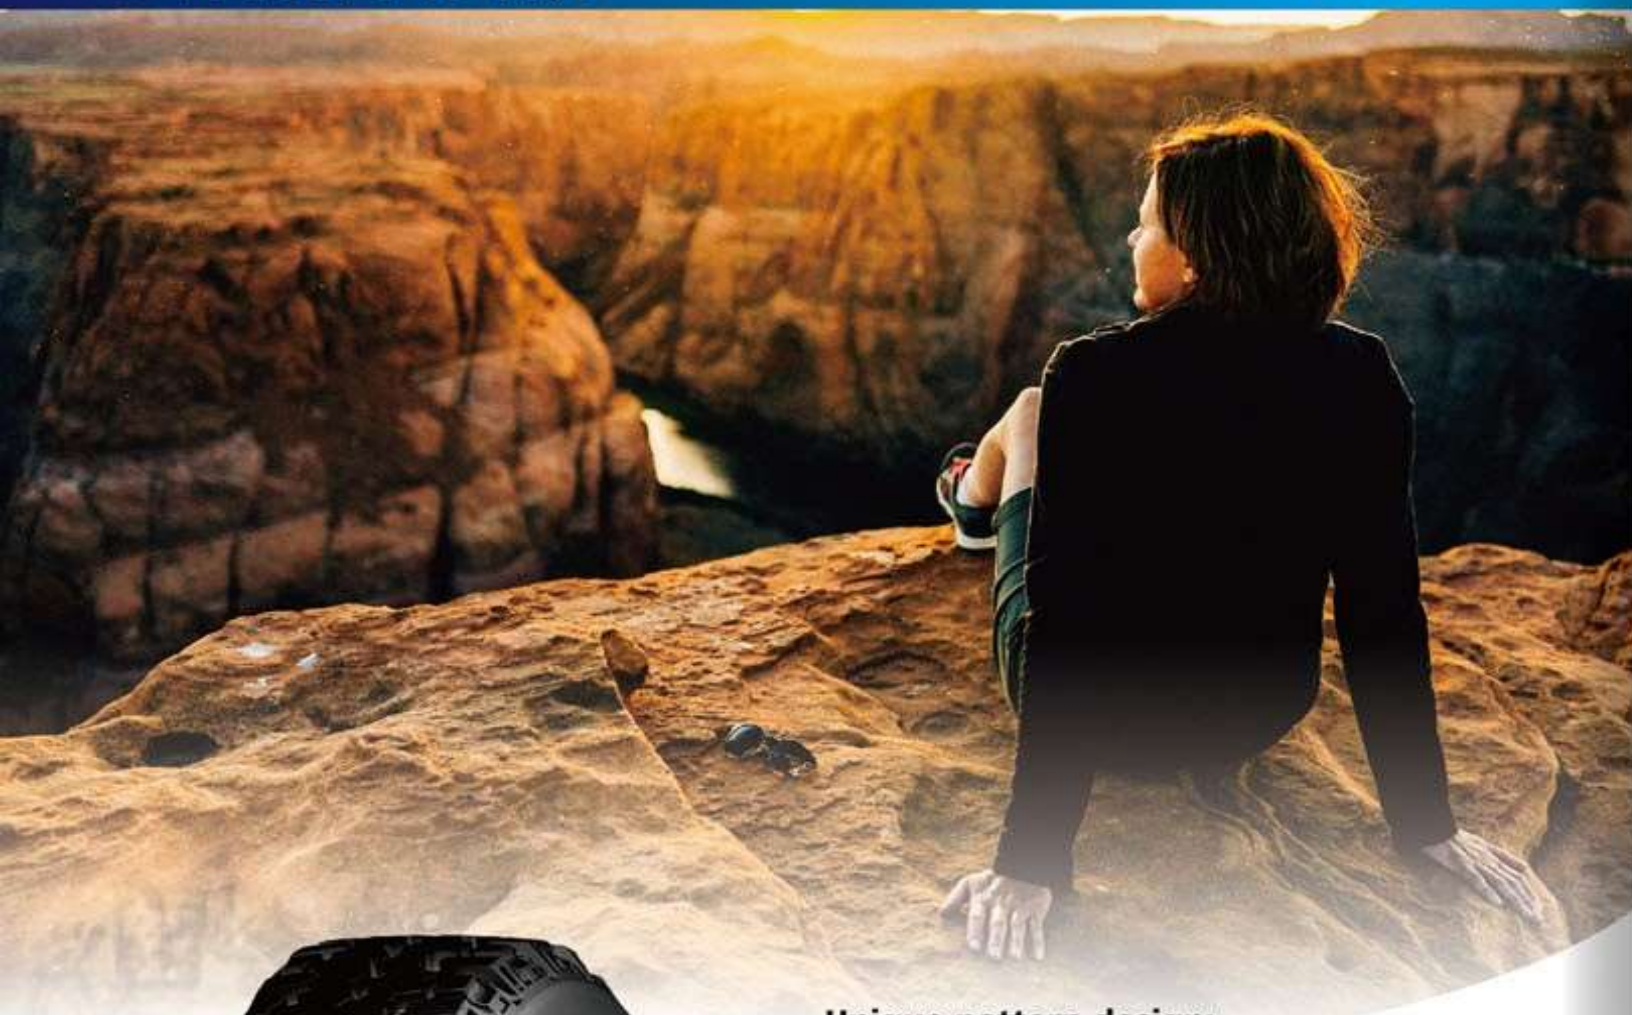

Unique pattern design:

- 1. Three main zigzag grooves and aggressive pattern design provide outstanding traction on all of road conditons.
- 2. High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.
- 3. The blockt road design with multiple-sipes provide outstanding off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and conering performance.
- 4. Jointless Nylon band and strong structure design provide the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
31×10.50R15LT(POR)	109	Q	6PR	8 1/2J	350/51	775	268	13.2	-	-	-	-	BSW
33×12.50R15LT(POR)	108	Q	6PR	10J	250/35	826	318	13.2	-	-	-	-	BSW
35×12.50R15LT(POR)	113	Q	6PR	10J	250/35	877	318	13.2	-	-	-	-	BSW
33×12.50R17LT(POR)	120	Q	10PR	10J	450/65	832	318	13.2	-	-	-	-	BSW
35×12.50R17LT(POR)	121	Q	10PR	10J	450/65	877	318	13.2	-	-	-	-	BSW
33×12.50R18LT(POR)	118	Q	10PR	10J	450/65	832	318	13.2	-	-	-	-	BSW
LT235/85R16(POR)	120/116	Q	10PR	6 1/2J	550/80	806	235	13.2	-	-	-	-	BSW
LT245/75R16(POR)	120/116	Q	10PR	7J	550/80	774	248	13.2	-	-	-	-	BSW
LT265/70R17(POR)	121/118	Q	10PR	8J	550/80	804	272	13.2	-	-	-	-	BSW
LT285/70R17(POR)	121/118	Q	10PR	8 1/2J	550/80	832	292	13.2	-	-	-	-	BSW
LT265/75R16	123/120	Q	10PR	7 1/2J	550/80	804	267	13.2	-	-	-	-	BSW
LT285/75R16	126/123	Q	10PR	8J	550/80	834	286	13.2	-	-	-	-	BSW
305/70R16LT	124/121	Q	10PR	9J	450/65	840	311	13.2	-	-	-	-	BSW
315/75R16LT	127/124	Q	10PR	8 1/2J	450/65	884	313	13.2	-	-	-	-	BSW
37×12.50R17LT	124	Q	8PR	10J	350/50	934	318	13.2	-	-	-	-	BSW
35×12.50R18LT	123	Q	10PR	10J	450/65	883	318	13.2	-	-	-	-	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. Off-Road Maximum Traction Tyre, designed for extreme 4X4 application, confidence in performance on muddy, snowy and rocky terrain as well as sealed road performance, with extra ground clearance, higher load-carrying capacity, and greater ability to go off-road. 4X4 enthusiasts know it for its long wear, low noise and aggressive tread pattern.
- 2. Strategically placed ribs within the lateral grooves of the tread design help to discharge stones and resist stone drilling.
- 3. Specially developed tread compound helps resist the cutting, tearing and chunking commonly developed in extended off-road applications.
- 4. Strategically placed in the lower side wall area, a raised rim protector helps protect the wheel and tyre from hazards in off-road driving conditions.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
33×12.50R20LT	114	Q	10PR	10J	450/65	826	318	14.2	-	-	-	-	BSW
35×12.50R20LT	121	Q	10PR	10J	450/65	877	318	14.2	-	-	-	-	BSW
35×12.50R22LT	117	Q	10PR	10J	450/65	877	318	14.2	-	-	-	-	BSW
37×12.50R22LT	123	Q	10PR	10J	450/65	928	318	14.2	-	-	-	-	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

HP

UHP

HT

VAN

AT


MT

AS

WINTER

ST

STUDED

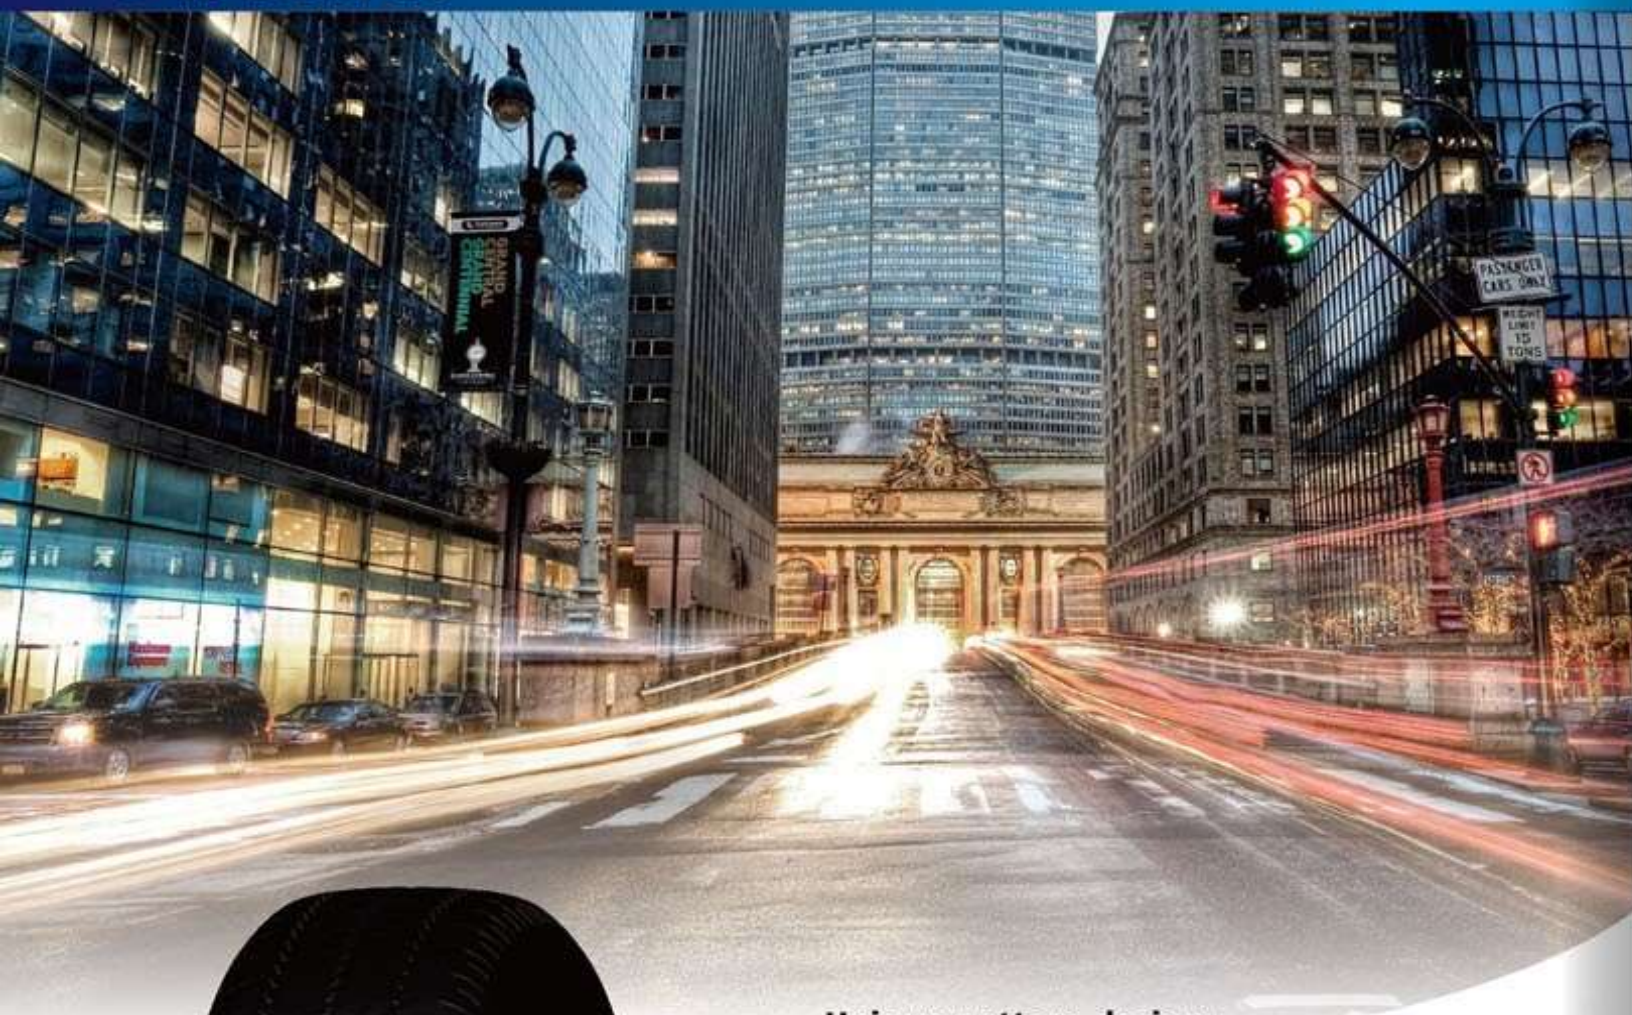

Unique pattern design:

- 1. The new butterfly pattern.
- 2. Tortuous longitudinal main grooves with cross coherent transverse grooves and sipes supplemented.
- 3. Outline the latest design technology.
- 4. Special wear resistant tread compound.

Excellent performance:

- 1. The more beautiful.
- 2. To provide a firm grip wet and dry roads.
- 3. The tire speed, durability, superior load performance.
- 4. Have a good performance at low temperature environment.




Ride Comfort Quiet Fuel Efficiency Long Mileage M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
155R12C	88/86	R	8PR	4.50B	450/65	550	157	7.8	-	E	C	71	BSW
145R12C	86/84	Q	8PR	4.00B	450/65	542	147	7.8	-	E	C	71	BSW
155R13C	90/88	R	8PR	4.50B	450/65	578	157	7.8	-	E	C	70	BSW
165/70R14C	89/87	R	6PR	5J	375/55	588	170	7.8	-	E	C	70	BSW
175/65R14C	90/88	T	6PR	5J	375/55	584	177	8.2	-	E	C	71	BSW
185R14C	102/100	R	8PR	5 1/2J	450/65	650	188	8.2	-	E	C	71	BSW
195R14C	106/104	R	8PR	5 1/2J	450/65	666	198	8.2	-	E	C	71	BSW
195/70R15C	104/102	R	8PR	6J	450/65	655	201	8.5	-	E	C	74	BSW
195R15C	106/104	R	8PR	5 1/2J	450/65	693	196	8.2	-	E	C	71	BSW
205/70R15C	106/104	R	8PR	6J	450/65	669	209	8.5	-	E	C	71	BSW
215/65R15C	104/102	T	6PR	6 1/2J	375/55	661	221	8.5	-	E	C	71	BSW
215/70R15C	109/107	R	8PR	6 1/2J	450/65	683	221	8.5	-	E	C	72	BSW
225/70R15C	112/110	R	8PR	6 1/2J	450/65	697	228	8.7	-	E	C	71	BSW
175/75R16C	101/99	R	8PR	5J	475/69	668	177	7.8	-	E	C	71	BSW
185/75R16C	104/102	R	8PR	5J	475/69	684	184	8.2	-	E	C	71	BSW
195/65R16C	104/102	T	8PR	6J	475/69	660	201	8.5	-	E	C	71	BSW
195/75R16C	107/105	R	8PR	5 1/2J	475/69	698	196	8.2	-	E	C	71	BSW
205/65R16C	107/105	T	8PR	6J	475/69	672	209	8.5	-	E	C	71	BSW
205/75R16C	110/108	R	8PR	5 1/2J	475/69	714	203	8.5	-	E	C	72	BSW
215/65R16C	109/107	T	8PR	6 1/2J	475/69	686	221	8.5	-	E	C	72	BSW
215/75R16C	113/111	R	8PR	6J	475/69	728	216	8.5	-	E	C	72	BSW
225/65R16C	112/110	T	8PR	6 1/2J	475/69	698	228	8.7	-	E	C	72	BSW
235/65R16C	115/113	T	8PR	7J	475/69	712	240	10.0	-	E	C	72	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

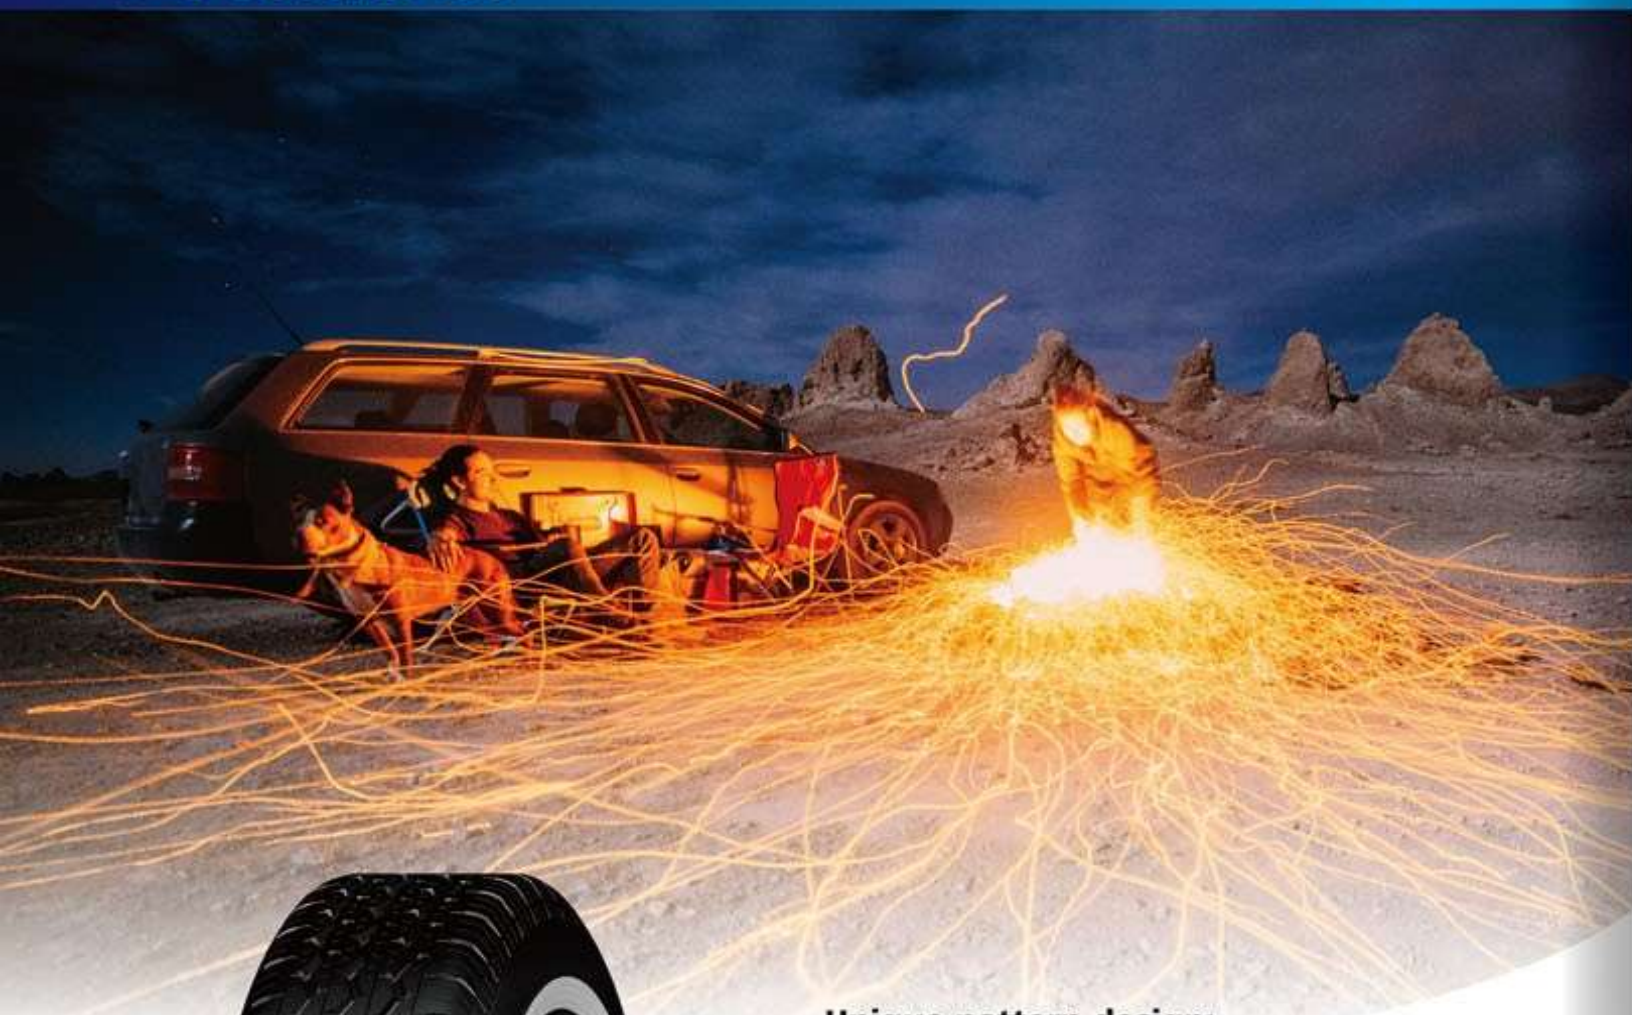

Unique pattern design:

- 1. Reinforced structure and special abrasion resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.
- 2. Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.
- 3. Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.
- 4. White sidewall rib shows extraordinary appearance.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
155R13C	85/83	R	6PR	4.50B	350/50	578	157	7.8	-	-	-	-	BSW
155R13C	90/88	R	8PR	4.50B	450/65	578	157	7.8	-	-	-	-	BSW
185R14C	102/100	R	8PR	5 1/2J	450/65	650	188	8.2	-	-	-	-	WR
195R14C	106/104	R	8PR	5 1/2J	450/65	666	198	8.2	-	-	-	-	WR
185R15C	103/102	R	8PR	5 1/2J	450/65	674	188	8.2	-	-	-	-	WR
195R15C	106/104	R	8PR	5 1/2J	450/65	693	196	8.2	-	-	-	-	WR
205/75R14C	109/107	R	8PR	5 1/2J	475/69	664	203	8.7	-	-	-	-	BSW
205/75R15C	109/107	R	8PR	5 1/2J	475/69	689	203	8.7	-	-	-	-	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

HP

UHP

HT

VAN

AT

MT

AS

WINTER

ST

STUDED



Unique pattern design:

- 1. Four main grooves provide good driving stability and wet performance.
- 2. Reasonable pattern area, perfect collocation of every grooves.
- 3. Special tread compound, ensure tire performance stability in all kinds of weather conditions.
- 4. White sidewall rib shows extraordinary appearance.



Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
P195/75R14	92	S	-	5 1/2J	300/44	648	196	7.8	420AB	-	-	-	WR
P205/75R14	95	S	-	5 1/2J	300/44	664	203	7.8	420AB	-	-	-	WR
P205/70R15	95	S	-	6J	300/44	669	209	7.8	420AB	-	-	-	WR
P205/75R15	97	T	-	5 1/2J	300/44	689	203	7.9	420AB	-	-	-	WR
P215/75R15	100	T	-	6J	300/44	703	216	8.2	420AB	-	-	-	WR
P225/70R15	100	T	-	6 1/2J	300/44	692	228	7.9	420AB	-	-	-	WR
P225/75R15	102	T	-	6J	300/44	719	223	7.9	420AB	-	-	-	WR
P235/75R15	105	S	-	6 1/2J	300/44	733	235	8.2	420AB	-	-	-	WR



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.

HP

UHP

HT

VAN

AT

MT

AS

WINTER

ST

STUDED



Unique pattern design:

- 1. Central straight & Z wide Zig-Zag circumferential grooves, with the design of convexes in the bottom, improve the traction, shorten braking distance and increase the stability on the snow road.
- 2. Wide rolling tread, by using computer-optimized design, makes sure enough contact area for more grip. The wide open shoulder grooves prevent aquaplaning with enhanced wet grip and provide excellent water & snow evacuation.
- 3. Bionic tread pattern design makes whole tread blocks' stiffness more with the optimized deployment of "Z" shape sipes, provide great grip on snow & ice condition.
- 4. Special tread compound remains flexible at lower temperatures to make sure the grip on winter road condition, while reduce the rolling resistance.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
175/70R13	82	T	-	5.00B	300/44	576	177	8.3	-	E	C	69	BSW
175/65R14	82	T	-	5J	300/44	584	177	8.3	-	E	C	69	BSW
175/70R14	88 XL	T	-	5J	340/50	602	177	8.3	-	E	C	69	BSW
185/65R14	86	T	-	5 1/2J	300/44	596	189	8.3	-	E	C	69	BSW
185/70R14	92 XL	T	-	5 1/2J	340/50	616	189	8.3	-	E	C	69	BSW
195/70R14	95 XL	T	-	6J	340/50	630	201	8.3	-	E	C	69	BSW
155/65R14	75	T	-	4 1/2J	300/44	558	157	7.8	-	E	C	69	BSW
165/60R14	75	T	-	5J	300/44	554	170	7.8	-	E	C	69	BSW
165/65R14	79	T	-	5J	300/44	570	170	7.8	-	E	C	69	BSW
165/70R14	85 XL	T	-	5J	340/50	588	170	7.8	-	E	C	69	BSW
185/60R14	82	T	-	5 1/2J	300/44	578	189	8.3	-	E	C	70	BSW
185/60R15	88 XL	H	-	5 1/2J	340/50	603	189	8.3	-	E	C	70	BSW
185/65R15	88	H	-	5 1/2J	300/44	621	189	8.3	-	E	C	70	BSW
195/60R15	88	H	-	6J	300/44	615	201	8.3	-	E	C	69	BSW
205/65R15	94	H	-	6J	300/44	647	209	8.3	-	E	C	69	BSW
215/70R15	98	T	-	6 1/2J	300/44	683	221	8.3	-	E	C	70	BSW
175/65R15	84	T	-	5J	300/44	609	177	8.2	-	E	C	70	BSW
185/55R15	82	H	-	6J	300/44	585	194	8.2	-	E	C	71	BSW
195/65R15	95 XL	T	-	6J	340/50	635	201	8.3	-	E	C	70	BSW
205/55R16	91	H	-	6 1/2J	300/44	632	214	8.3	-	E	C	70	BSW
205/60R16	96 XL	H	-	6J	340/50	652	209	8.3	-	E	C	70	BSW
215/60R16	99 XL	H	-	6 1/2J	340/50	664	221	8.3	-	E	C	70	BSW
215/65R16	98	H	-	6 1/2J	300/44	686	221	8.3	-	E	C	71	BSW
225/60R16	98	H	-	6 1/2J	300/44	676	228	8.3	-	E	C	71	BSW
235/70R16	106	T	-	7J	300/44	736	240	8.3	-	E	C	71	BSW
205/55R16	94 XL	H	-	6 1/2J	340/50	632	214	8.3	-	E	C	70	BSW
215/70R16	100	T	-	6 1/2J	300/44	708	221	8.2	-	E	C	71	BSW
225/65R16	100	H	-	6 1/2J	300/44	698	228	8.2	-	E	C	71	BSW
225/70R16	107 XL	T	-	6 1/2J	340/50	722	228	8.2	-	E	C	71	BSW
235/65R16	103	H	-	7J	300/44	712	240	8.2	-	E	C	71	BSW
245/70R16	111 XL	T	-	7J	340/50	750	248	8.2	-	E	C	71	BSW
265/70R16	112	T	-	8J	300/44	778	272	8.2	-	E	C	71	BSW
225/65R17	102	T	-	6 1/2J	300/44	724	228	8.3	-	E	C	71	BSW
235/65R17	108 XL	T	-	7J	340/50	738	240	8.3	-	E	C	71	BSW
245/65R17	111 XL	T	-	7J	340/50	750	248	8.3	-	E	C	71	BSW
265/70R17	115	T	-	8J	300/44	804	272	8.3	-	E	C	70	BSW
215/60R17	96	H	-	6 1/2J	300/44	690	221	8.2	-	E	C	70	BSW
215/65R17	99	H	-	6 1/2J	300/44	712	221	8.2	-	E	C	71	BSW
225/60R17	99	H	-	6 1/2J	300/44	702	228	8.2	-	E	C	71	BSW
265/65R17	112	T	-	8J	300/44	776	272	8.2	-	E	C	71	BSW
225/55R17	101 XL	H	-	7J	340/50	680	223	8.2	-	E	C	71	BSW
275/55R20	117 XL	H	-	8 1/2J	340/50	810	284	8.5	-	E	C	71	BSW
275/60R20	119 XL	H	-	8J	340/50	838	279	8.5	-	E	C	70	BSW
195/70R15C	104/102	R	-	6J	450/65	655	201	9.2	-	E	C	72	BSW
215/65R15C	104/102	R	-	6 1/2J	375/55	661	221	9.2	-	E	C	72	BSW
215/70R15C	109/107	R	-	6 1/2J	450/65	683	221	9.2	-	E	C	70	BSW
225/70R15C	112/110	R	-	6 1/2J	450/65	697	228	9.2	-	E	C	70	BSW
185/75R16C	104/102	R	-	5J	475/69	684	184	8.7	-	E	C	70	BSW
195/65R16C	104/102	R	-	6J	475/69	660	201	9.2	-	E	C	70	BSW
195/75R16C	107/105	R	-	5 1/2J	475/69	698	196	8.7	-	E	C	70	BSW
205/65R16C	107/105	R	-	6J	475/69	672	209	9.2	-	E	C	70	BSW
215/65R16C	109/107	R	-	6 1/2J	475/69	686	221	9.2	-	E	C	72	BSW
215/75R16C	113/111	R	-	6J	475/69	728	216	9.2	-	E	C	70	BSW
225/65R16C	112/110	R	-	6 1/2J	475/69	698	228	9.2	-	E	C	72	BSW
235/65R16C	115/113	R	-	7J	475/69	712	240	9.7	-	E	C	71	BSW
LT225/75R16	115/112	S	-	6J	550/80	744	223	10.2	-	E	C	71	BSW
LT245/75R16	120/116	S	-	7J	550/80	774	248	10.2	-	E	C	72	BSW
LT245/70R17	119/116	S	-	7J	550/80	776	248	10.7	-	E	C	72	BSW
LT265/70R17	121/118	S	-	8J	550/80	804	272	10.7	-	E	C	72	BSW
LT275/65R18	123/120	S	-	8J	550/80	815	279	10.7	-	E	C	72	BSW
LT275/70R18	125/122	S	-	8J	550/80	843	279	10.7	-	E	C	72	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance. The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.
- 2. Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.
- 3. Continuous outside tread blocks enhance excellent performance and precise control when cornering at highspeed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.
- 4. Special tread compound remain flexible at lower temperatures to make sure the grip on winter road conditions and reduce the rolling resistance.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
165/70R13	79	T	-	5.00B	300/44	562	170	7.8	-	E	C	68	BSW
185/60R14	82	T	-	5.1/2J	300/44	578	189	8.3	-	E	C	68	BSW
195/50R15	82	H	-	6J	300/44	577	201	8.3	-	E	C	69	BSW
195/55R15	85	H	-	6J	300/44	595	201	8.3	-	E	C	69	BSW
195/60R15	88	H	-	6J	300/44	615	201	8.3	-	E	C	69	BSW
195/65R15	91	T	-	6J	300/44	635	201	8.3	-	E	C	69	BSW
195/65R15	91	H	-	6J	300/44	635	201	8.3	-	E	C	69	BSW
195/65R15	95 XL	T	-	6J	340/50	635	201	8.3	-	E	C	69	BSW
195/55R16	91 XL	H	-	6J	340/50	620	201	8.3	-	E	C	69	BSW
205/55R16	91	H	-	6 1/2J	300/44	632	214	8.3	-	E	C	69	BSW
205/55R16	94 XL	H	-	6 1/2J	340/50	632	214	8.3	-	E	C	69	BSW
215/55R16	97 XL	H	-	7J	340/50	642	226	8.3	-	E	C	70	BSW
225/55R16	99 XL	H	-	7J	340/50	654	233	8.3	-	E	C	70	BSW
205/50R17	93 XL	H	-	6 1/2J	340/50	638	214	8.2	-	E	C	70	BSW
215/50R17	95 XL	H	-	7J	340/50	648	226	8.2	-	E	C	70	BSW
215/55R17	98 XL	H	-	7J	340/50	668	226	8.2	-	E	C	70	BSW
225/45R17	94 XL	H	-	7 1/2J	340/50	634	225	8.3	-	E	C	70	BSW
225/50R17	98 XL	H	-	7J	340/50	658	233	8.2	-	E	C	70	BSW
235/45R17	97 XL	H	-	8J	340/50	644	236	8.3	-	E	C	70	BSW
235/55R17	103 XL	H	-	7 1/2J	340/50	690	245	8.2	-	E	C	70	BSW
225/40R18	92 XL	H	-	8J	340/50	637	230	8.2	-	E	C	70	BSW
225/45R18	95 XL	H	-	7 1/2J	340/50	659	225	8.2	-	E	C	70	BSW
235/45R18	98 XL	H	-	8J	340/50	669	236	8.2	-	E	C	71	BSW
235/55R18	104 XL	H	-	7 1/2J	340/50	715	245	8.2	-	E	C	71	BSW
235/60R18	107 XL	H	-	7J	340/50	739	240	8.2	-	E	C	71	BSW
245/45R18	100 XL	H	-	8J	340/50	677	243	8.2	-	E	C	71	BSW
245/60R18	105	H	-	7J	300/44	751	248	8.2	-	E	C	71	BSW
255/55R18	109 XL	H	-	8J	340/50	737	265	8.2	-	E	C	71	BSW
235/55R19	105 XL	H	-	7 1/2J	340/50	741	245	8.2	-	E	C	72	BSW
245/45R19	102 XL	H	-	8J	340/50	703	243	8.2	-	E	C	72	BSW
255/50R19	107 XL	H	-	8J	340/50	739	265	8.2	-	E	C	72	BSW
255/55R19	111 XL	H	-	8J	340/50	763	265	8.2	-	E	C	72	BSW
275/40R20	106 XL	H	-	9 1/2J	340/50	728	278	8.2	-	E	C	72	BSW
275/45R20	110 XL	H	-	9J	340/50	756	273	8.2	-	E	C	72	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. Ideal for conditions in the region which does not require extreme snow tyres and more performance is required.
- 2. This unique tread design also features a proven modular tread block geometry which offer a level of grip and performance which is unique in its class.
- 3. A Directional tyre that offers fantastic water dispersion and exceptional grip thanks to its unique features which includes an excessive number of sipes allowing the tread to conform to the road surface, and its extra wide channels that excavates fluids in preposition to the pressure and weight of the vehicle and road requirements.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
185/60R15	88 XL	T	-	5 1/2J	340/50	603	189	8.8	-	E	C	69	BSW
195/65R15	95 XL	T	-	6J	340/50	635	201	8.8	-	E	C	69	BSW
205/60R16	96 XL	T	-	6J	340/50	652	209	8.7	-	E	C	70	BSW
215/60R16	99 XL	T	-	6 1/2J	340/50	664	221	8.8	-	E	C	70	BSW
215/65R16	102 XL	T	-	6 1/2J	340/50	686	221	8.8	-	E	C	70	BSW
215/70R16	100	T	-	6 1/2J	300/44	708	221	8.8	-	E	C	70	BSW
225/60R16	102 XL	T	-	6 1/2J	340/55	676	228	8.8	-	E	C	70	BSW
225/65R16	104 XL	T	-	6 1/2J	340/55	698	228	8.8	-	E	C	70	BSW
235/70R16	106	T	-	7J	300/44	736	240	8.7	-	E	C	70	BSW
215/55R17	98 XL	H	-	7J	340/50	668	226	8.7	-	E	C	71	BSW
215/60R17	100 XL	H	-	6 1/2J	340/50	690	221	8.7	-	E	C	71	BSW
225/50R17	98 XL	H	-	7J	340/50	658	233	8.7	-	E	C	71	BSW
225/55R17	101 XL	H	-	7J	340/50	680	233	8.7	-	E	C	71	BSW
225/60R17	103 XL	H	-	6 1/2J	340/50	702	228	8.7	-	E	C	71	BSW
225/65R17	106 XL	T	-	6 1/2J	340/50	724	228	8.7	-	E	C	71	BSW
235/65R17	108 XL	T	-	7J	340/50	738	240	8.7	-	E	C	71	BSW
245/65R17	111 XL	T	-	7J	340/50	750	248	8.7	-	E	C	72	BSW
LT225/75R16	115/112	S	10PR	6J	475/69	744	223	10.2	-	E	C	72	BSW
LT245/75R16	120/116	S	10PR	7J	550/80	774	248	10.2	-	E	C	72	BSW
LT245/70R17	119/116	S	10PR	7J	550/80	776	248	10.2	-	E	C	72	BSW
LT265/70R17	121/118	S	10PR	8J	550/80	804	272	10.2	-	E	C	72	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. Accurate calculation of the design pattern pieces.
- 2. Widening the tread design, with a central longitudinal groove straight rib pattern.
- 3. The most advanced computing software variable pitch tread optimal rehearsal.
- 4. PCR special tread compound.

Excellent performance:

1. Provide optimized tread handling, wet skid resistance.
2. Holding strong, directional precision, handling, braking drive good.
3. To achieve a quiet and comfortable ride.
4. High-speed, slippery, rolling resistance, noise, the best performance combination.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
175R14C	99/98	R		5J	450/65	634	178	8.2	-	E	C	69	BSW
185R14C	102/100	R		5 1/2J	450/65	650	188	8.2	-	E	C	69	BSW
145/70R12	69	T		4.50B	300/44	509	150	7.8	-	E	C	69	BSW
195/60R14	86	H		6J	300/44	590	201	8.3	-	E	C	69	BSW
215/75R15	100	T		6J	300/44	703	216	8.3	-	E	C	69	BSW
195/60R16	89	H		6J	300/44	640	201	8.3	-	E	C	70	BSW
205/55R16	91	H		6 1/2J	300/44	632	214	8.3	-	E	C	70	BSW
225/55R17	101 XL	H		7J	340/50	680	223	8.3	-	E	C	71	BSW
225/65R17	102	T		6 1/2J	300/44	724	228	8.3	-	E	C	71	BSW
215/55R18	95	H		7J	300/44	693	226	8.2	-	E	C	72	BSW
225/60R18	100	H		6 1/2J	300/44	727	228	8.2	-	E	C	72	BSW
265/60R18	110	T		8J	300/44	775	272	8.2	-	E	C	72	BSW
285/60R18	116	T		8 1/2J	300/44	799	292	8.2	-	E	C	72	BSW
235/55R19	105 XL	H		7 1/2J	340/50	741	245	8.2	-	E	C	72	BSW
245/55R19	107 XL	H		7 1/2J	340/50	753	253	8.2	-	E	C	72	BSW
245/45R20	103 XL	H		8J	340/50	728	243	8.2	-	E	C	73	BSW
245/50R20	102	H		7 1/2J	300/44	754	253	8.2	-	E	C	73	BSW
255/55R20	110 XL	H		8J	340/50	788	265	8.2	-	E	C	73	BSW
285/50R20	116 XL	H		9J	340/50	794	297	8.5	-	E	C	73	BSW
275/45R21	110 XL	H		9J	340/50	781	273	8.5	-	E	C	73	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. The compound mixture ensures longevity without compromising on safety and performance.
- 2. This unique design offers stability in cornering, it has superior performance due to its superior design, where the Royal A/S provided performance as an all-rounder tyre, the Royal A/S provides superior performance in cornering on slippery conditions.
- 3. This design has a superior pitch frequency, which offers a considerable reduction in noise, offering a very comfortable and quiet ride.
- 4. Superior high tensile steel belts for durability, nylon blend cap to maximize the contact area with the road surface, all of these combined exceeds the goal of having a tyre which not only meets the needs of an exceptional all seasons tyre, but also provides exceptional performance.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
155/65R13	73	T	-	4.50B	300/44	532	157	7.6	420AA	E	B	68	BSW
155/70R13	75	T	-	4.50B	300/44	548	157	7.6	420AA	E	B	68	BSW
155/80R13	79	T	-	4.50B	300/44	578	157	7.6	420AA	E	B	68	BSW
165/70R13	79	T	-	5.00B	300/44	562	170	7.6	420AA	E	B	68	BSW
155/65R14	75	H	-	4 1/2J	300/44	558	157	7.6	420AA	E	B	68	BSW
165/60R14	75	H	-	5J	300/44	554	170	7.6	420AA	E	B	68	BSW
165/65R14	79	H	-	5J	300/44	570	170	7.6	420AA	E	B	68	BSW
165/70R14	81	H	-	5J	300/44	588	170	7.6	420AA	E	B	68	BSW
175/65R14	86 XL	T	-	5J	340/50	584	177	7.6	420AA	E	B	68	BSW
175/70R14	88 XL	T	-	5J	340/50	602	177	7.6	420AA	E	B	68	BSW
185/60R14	82	H	-	5 1/2J	300/44	578	189	7.8	420AA	E	B	68	BSW
185/65R14	86	H	-	5 1/2J	300/44	596	189	7.8	420AA	E	B	68	BSW
175/55R15	77	H	-	5 1/2J	300/44	573	182	7.8	420AA	E	B	68	BSW
175/60R15	81	H	-	5J	300/44	591	177	7.6	420AA	E	B	68	BSW
175/65R15	84	H	-	5J	300/44	609	177	7.8	420AA	E	B	68	BSW
185/55R15	82	V	-	6J	300/44	585	194	7.9	420AA	E	B	68	BSW
185/60R15	88 XL	H	-	5 1/2J	340/50	603	189	7.8	420AA	E	B	69	BSW
185/65R15	92 XL	T	-	5 1/2J	340/50	621	189	7.8	420AA	E	B	69	BSW
195/50R15	82	V	-	6J	300/44	577	201	7.8	420AA	E	B	69	BSW
195/55R15	85	V	-	6J	300/44	595	201	7.8	420AA	E	B	69	BSW
195/60R15	88	H	-	6J	300/44	615	201	7.8	420AA	E	B	69	BSW
195/65R15	91	H	-	6J	300/44	635	201	7.8	420AA	E	B	69	BSW
195/55R16	91 XL	V	-	6J	340/50	620	201	7.8	420AA	E	B	70	BSW
205/55R16	94 XL	V	-	6 1/2J	340/50	632	214	7.8	420AA	E	B	70	BSW
205/60R16	96 XL	H	-	6J	340/50	652	209	7.8	420AA	E	B	70	BSW
215/55R16	97 XL	V	-	7J	340/50	642	226	7.8	420AA	E	B	70	BSW
215/60R16	99 XL	H	-	6 1/2J	340/50	664	221	7.8	420AA	E	B	70	BSW
215/65R16	102 XL	H	-	6 1/2J	340/50	686	221	7.8	420AA	E	B	70	BSW
225/45R17	94 XL	W	-	7 1/2J	340/50	634	225	7.8	420AA	E	B	71	BSW
225/50R17	98 XL	W	-	7J	340/50	658	233	7.8	420AA	E	B	71	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.



Unique pattern design:

- 1. Two longitudinal and two wavy wide drainage ditch, effectively enhance the water evacuation performance, ensure the excellent handling performance in adverse weather condition.
- 2. Two asymmetric pattern design, with solid blocks, effectively enhance the grasping and safty on winter road condition.
- 3. Substantial knife-shped grooves with wavy steel sheet, keep optimized handling in contaction, sharp edage provide outstanding traction on wet and slippery surface and winter road condition.
- 4. New tread pattern design, lower-heat tread formulation, softer shore hardness tread than the last generation tire.



Ride Comfort



Quiet



Fuel Efficiency



Long Mileage



M+S

Size	Loading Index	S&R	PR	Standard Rim	MAX Pressure Kpa/Psi	Overall Diameter (mm)	SW (mm)	Tread Depth (±0.3mm)	UTQG	RR	WG	SL	SIDEWALL
ST175/80R13	91/87	L	6PR	5J	350/50	610	177	7.2	-	-	-	-	BSW
ST175/80R13	97/93	L	8PR	5J	450/65	610	177	7.2	-	-	-	-	BSW
ST205/75R14	100/96	L	6PR	5.5J	350/50	664	203	7.5	-	-	-	-	BSW
ST205/75R14	105/101	L	8PR	5.5J	450/65	664	203	7.6	-	-	-	-	BSW
ST215/75R14	102/98	L	6PR	6J	350/50	678	216	8.0	-	-	-	-	BSW
ST215/75R14	108/103	L	8PR	6J	450/65	678	216	8.0	-	-	-	-	BSW
ST205/75R15	101/97	L	6PR	5.5J	350/50	689	203	7.6	-	-	-	-	BSW
ST205/75R15	107/102	L	8PR	5.5J	450/65	689	203	7.6	-	-	-	-	BSW
ST225/75R15	113/108	L	8PR	6J	450/65	719	223	8.0	-	-	-	-	BSW
ST225/75R15	117/112	L	10PR	6J	550/80	719	223	8.0	-	-	-	-	BSW
ST235/80R16	119/114	L	8PR	6.5J	450/65	782	235	8.0	-	-	-	-	BSW
ST235/80R16	123/119	L	10PR	6.5J	550/80	782	235	8.0	-	-	-	-	BSW
ST235/80R16	124/120	L	10PR	6.5J	550/80	782	235	8.0	-	-	-	-	BSW



* New Developing Sizes / The Labeling Information Is Subject To Change Without Notice.