


# PEPIN PRECAST



WWW.PEPINPRECAST.COM

207-324-6125

1250 Gallon Tank  
 Weight (H-10): 11,500  
 (H-20): 13,775

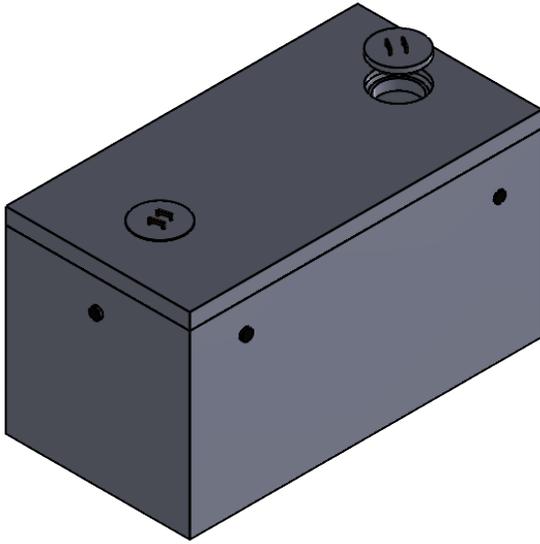

Rubber Boots on all inlets & outlets

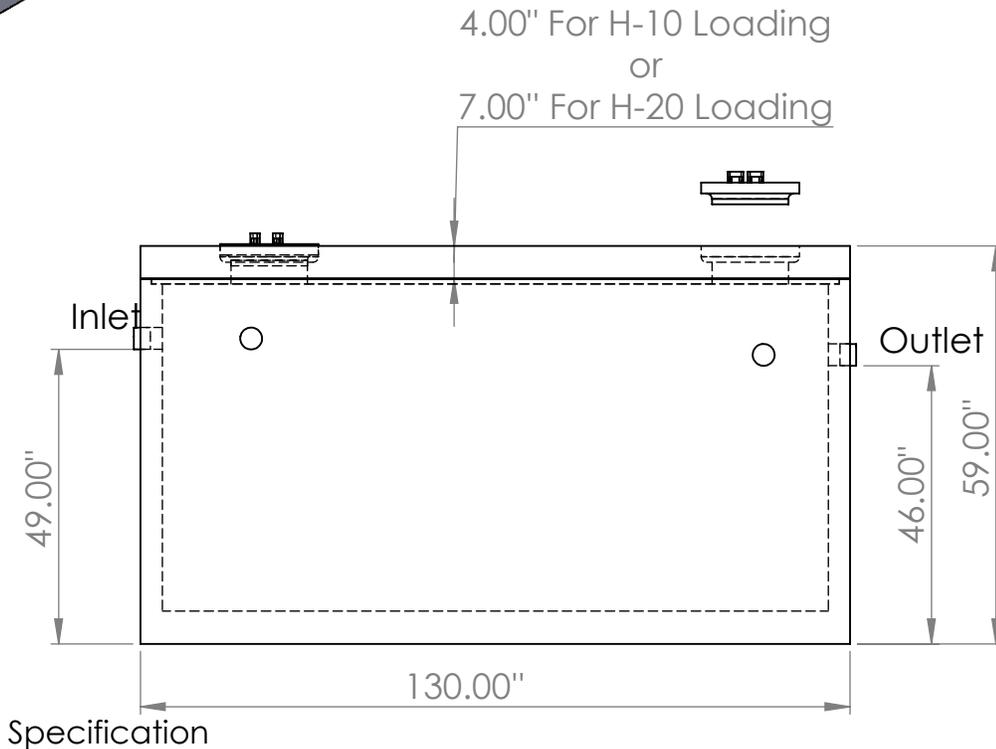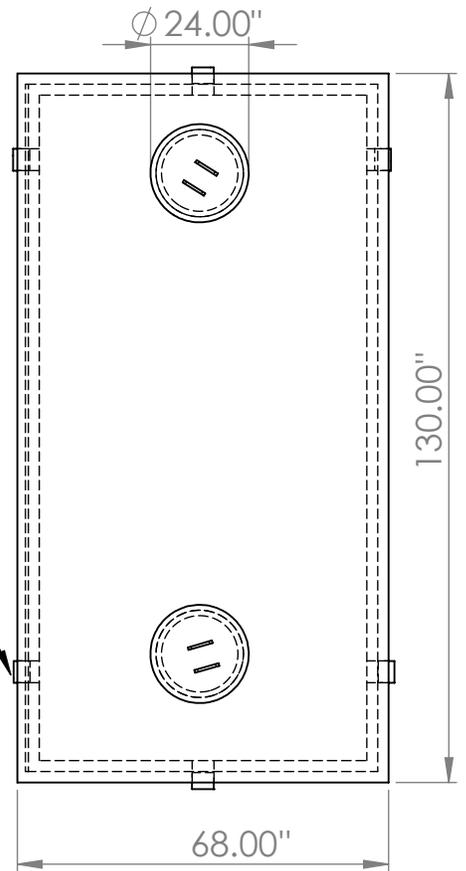

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE III PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT