

PEPIN PRECAST



WWW.PEPINPRECAST.COM

207-324-6125


1250 2 Piece Tank

"1250 Regular"

8100 LBS

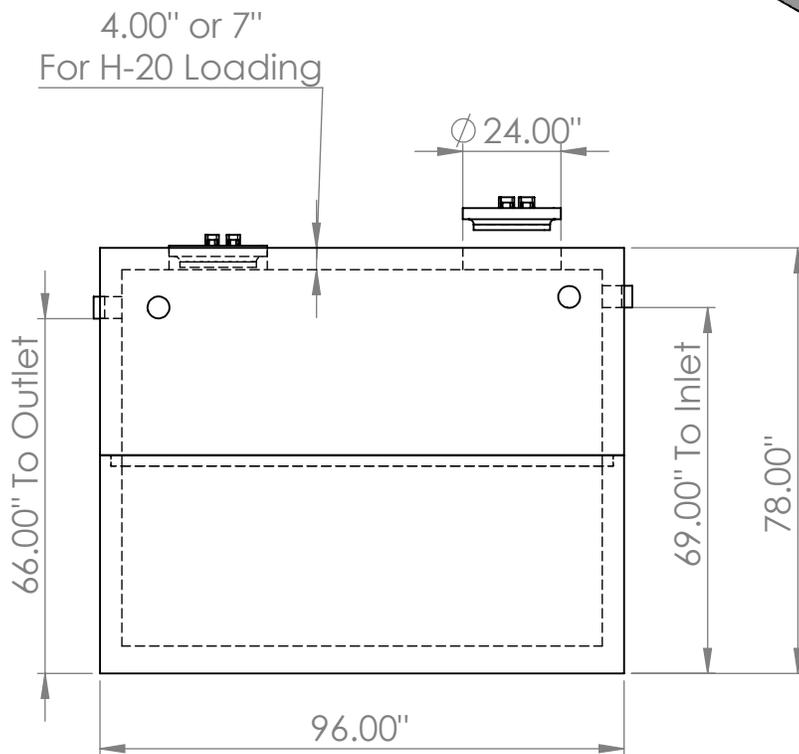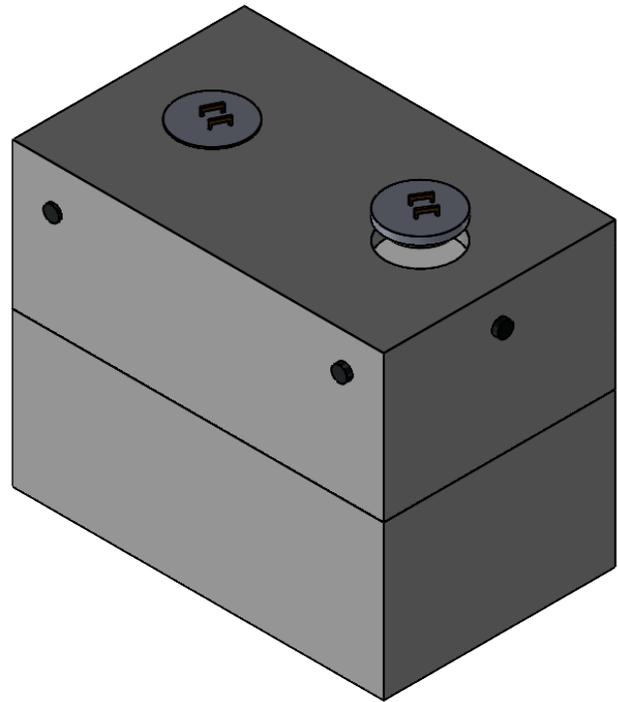

Rubber Boots
On All Inlets/Outlets

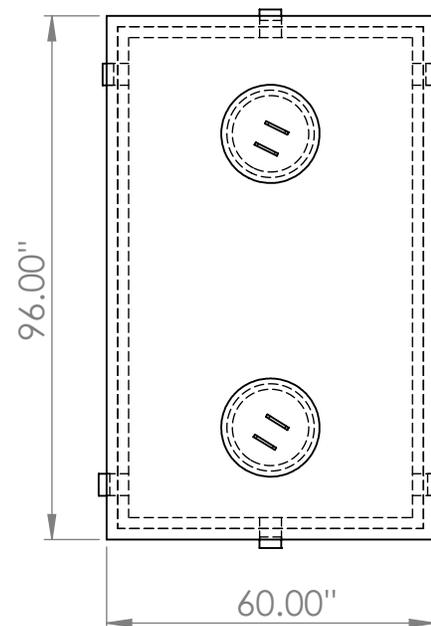

Specification

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE III PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT