

PEPIN PRECAST



59 Shaw Road, Sanford ME 04073

207-324-6125


WWW.PEPINPRECAST.COM

2 Compartment 1,250 Gallon Tank

11,800 lbs

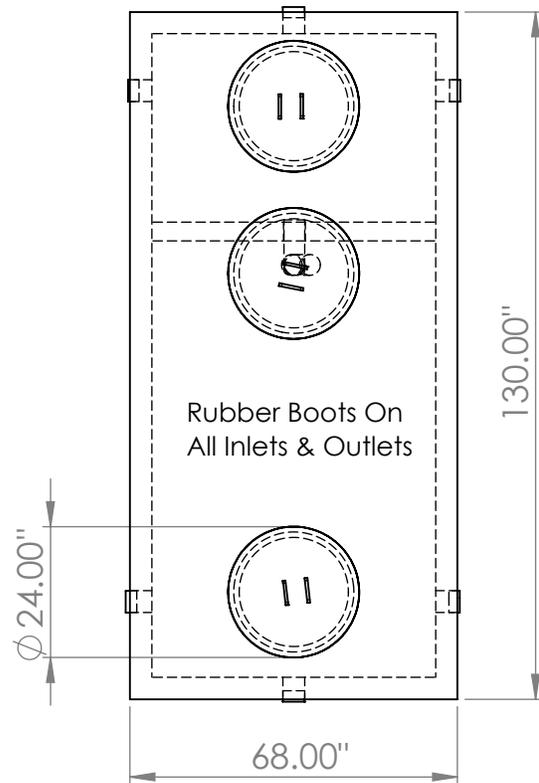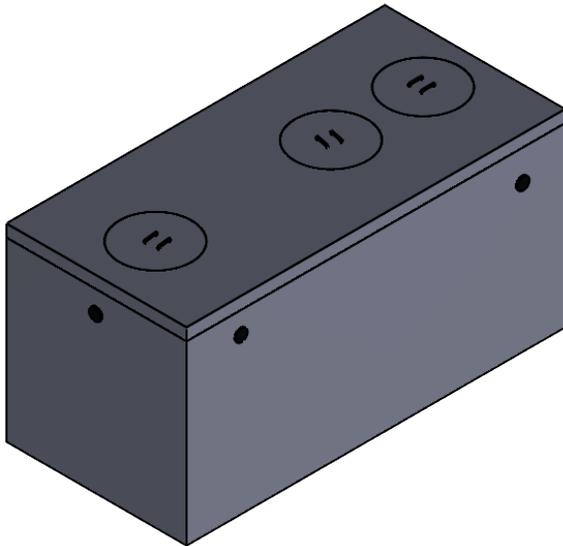

All Pepin Precast Tanks Available with Polyloc Risers Cast in!

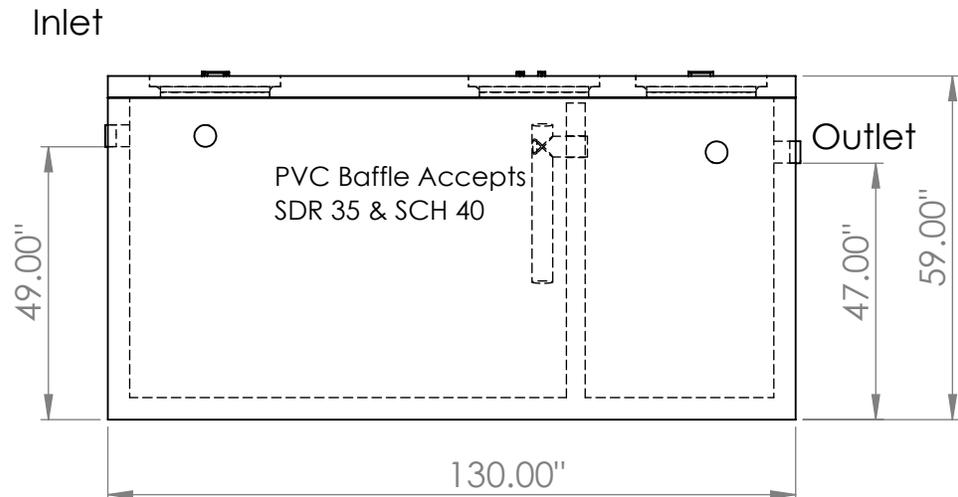

Specification

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE III PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT