
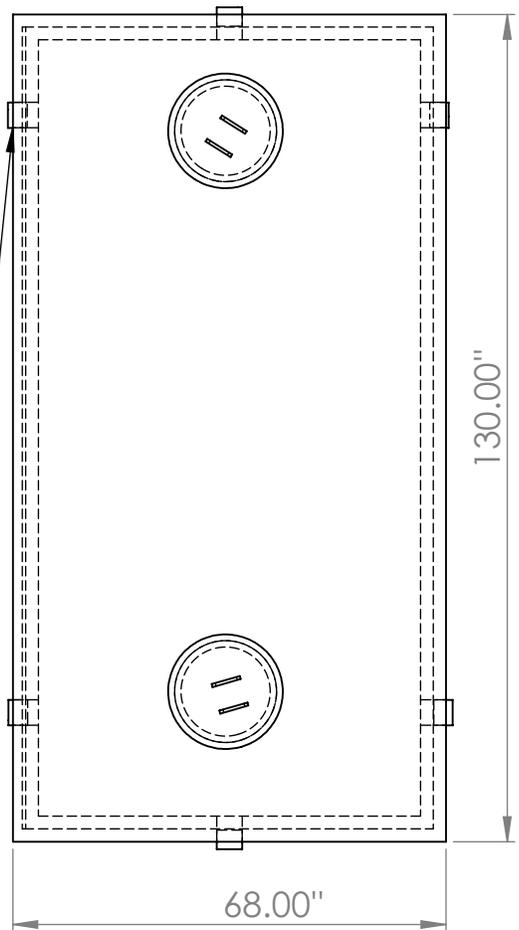


PEPIN PRECAST


WWW.PEPINPRECAST.COM
207-324-6125

1500 Gallon 1 Compartment
Weight: 13,000 LBS
HD: 17,000 LBS

Rubber Boots on all
inlets & outlets

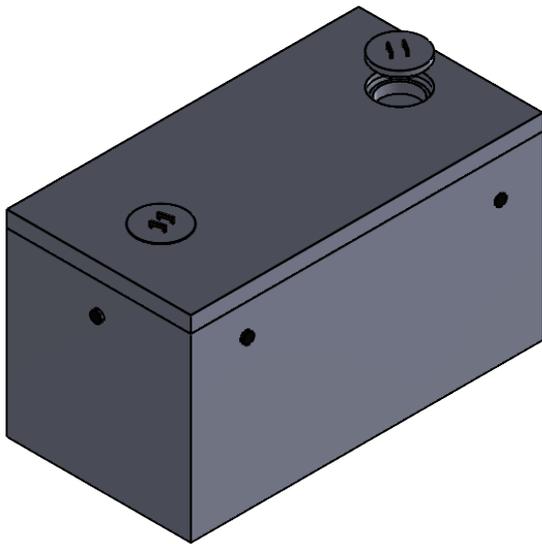

4.00" For H-10 Loading
or
7.00" For H-20 Loading

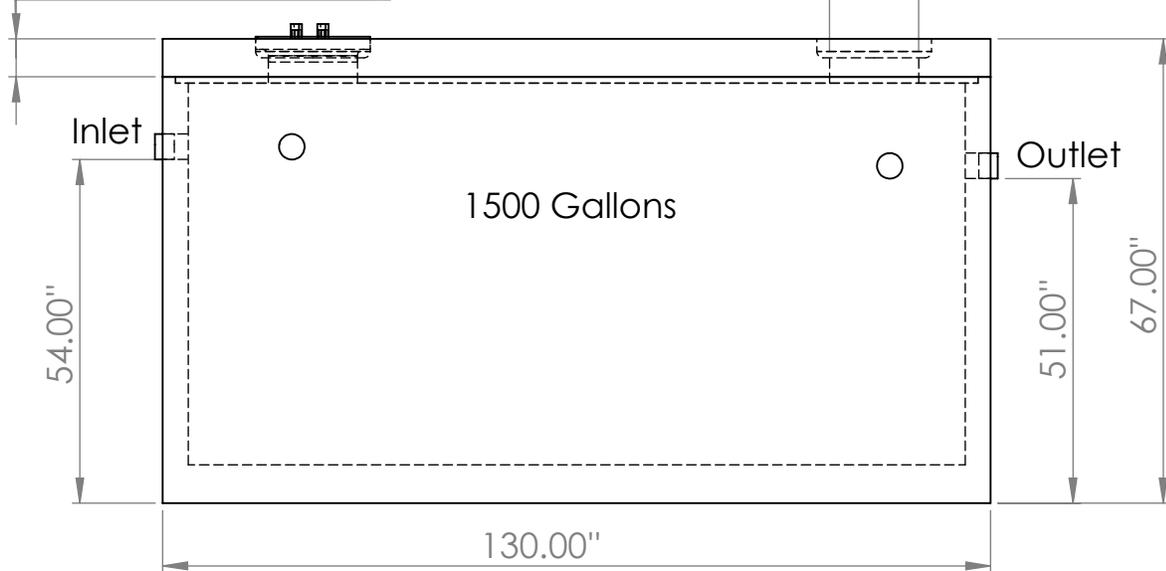

Specification

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE III PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT