

# PEPIN PRECAST



59 Shaw Road, Sanford ME 04073

207-324-6125

WWW.PEPINPRECAST.COM


1600 Gallon 2 Compartment Tank

Weight: 15,200 lbs

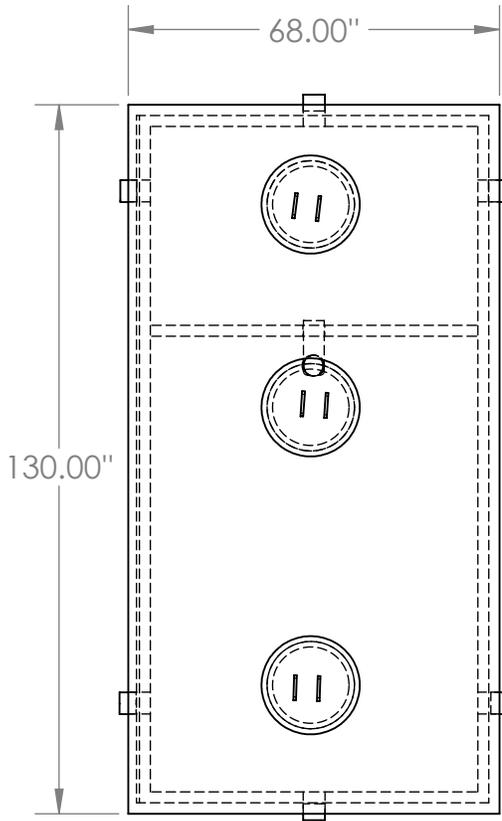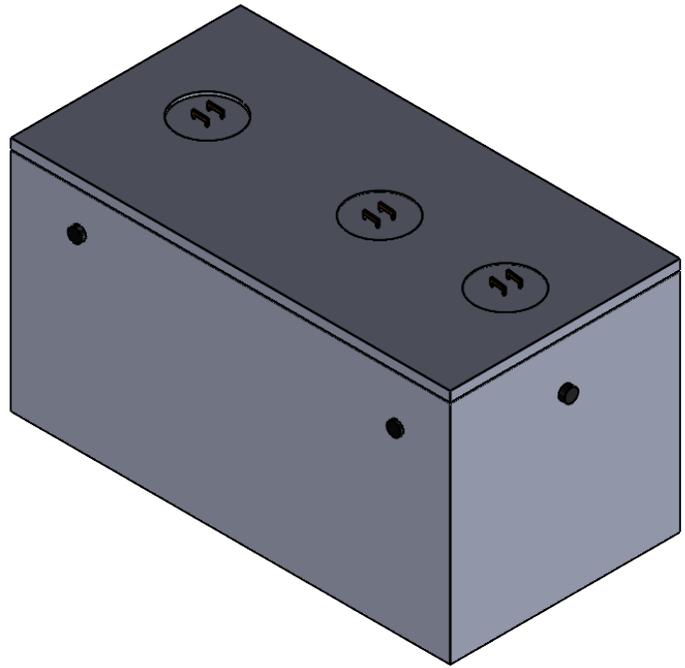

All Holes sealed with rubber boots

7" For H-20 Loading

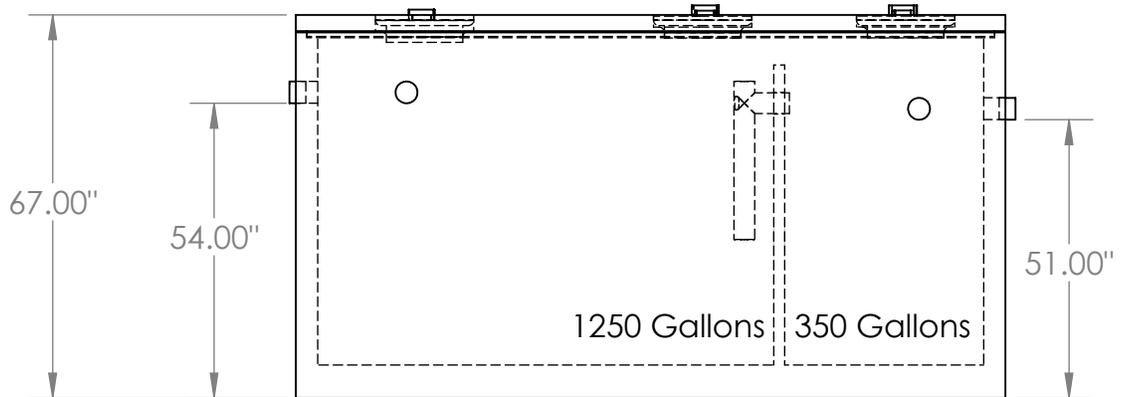

## Specification

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE II PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT