


PEPIN PRECAST

WWW.PEPINPRECAST.COM


207-324-6125

2,000 Gallon 1 Compartment


19,800 LBS

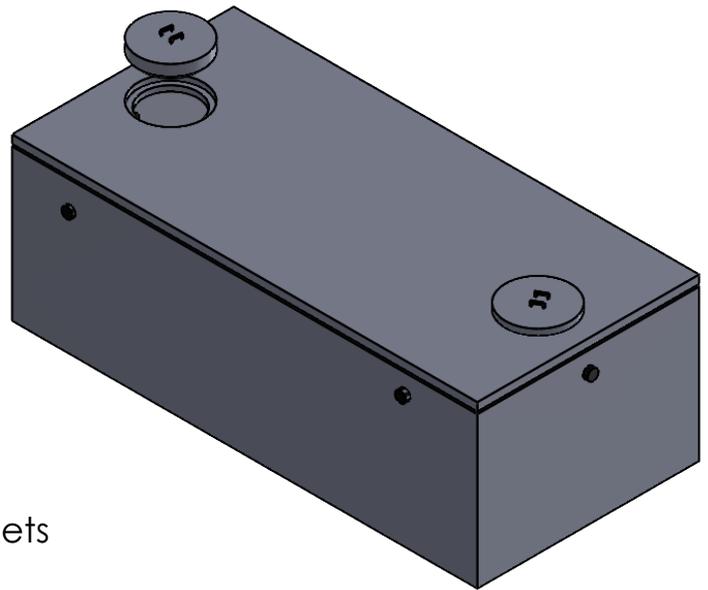

Rubbe Boots
on all Inlets & Outlets

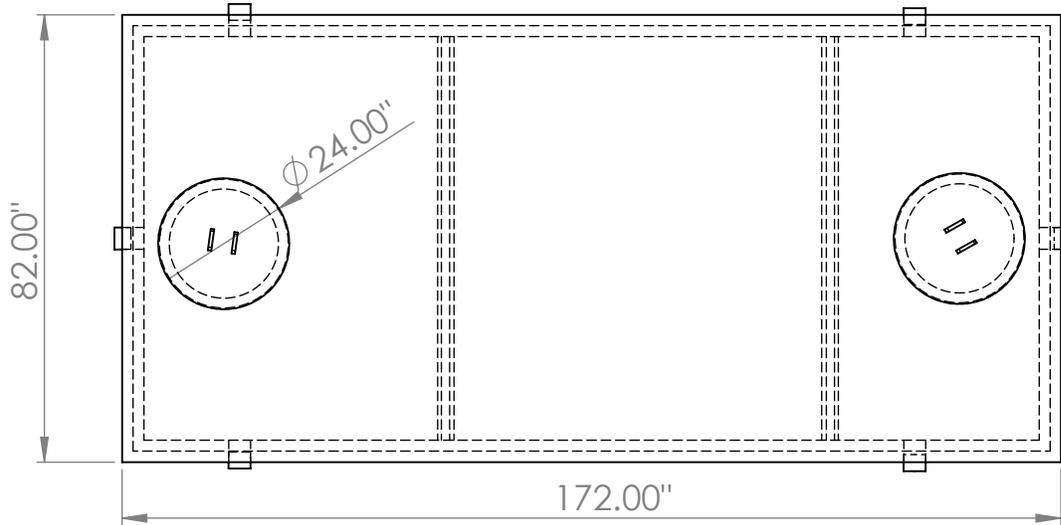

Available in H-10 or H-20 Loading

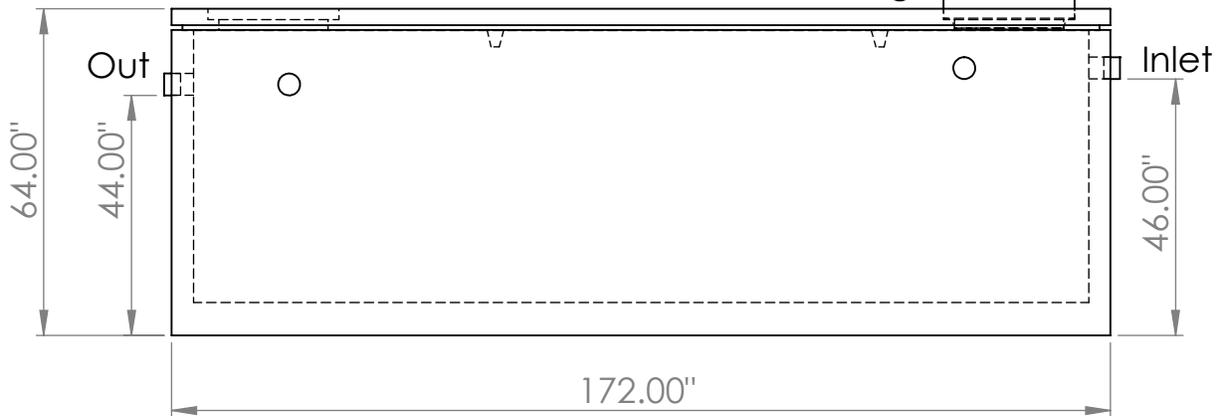

Specification

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE II PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT