

PEPIN PRECAST



59 Shaw Road, Sanford Maine

207-324-6125


WWW.PEPINPRECAST.COM

2000 Gallon 2 Compartment

Weight: 19,500 LBS

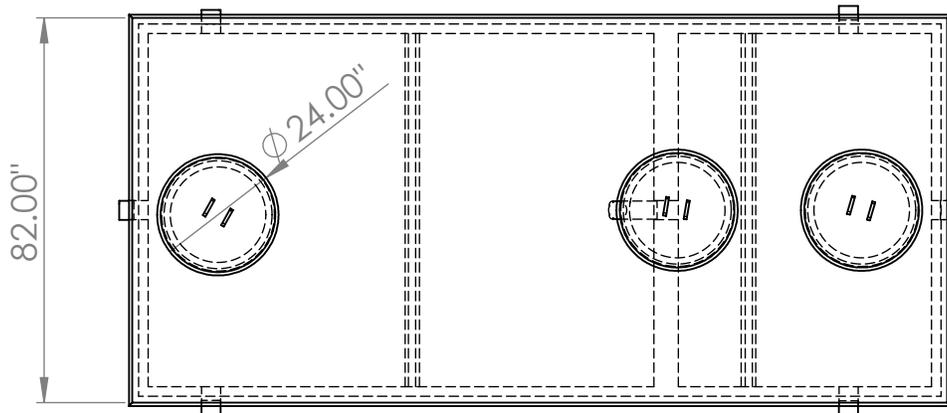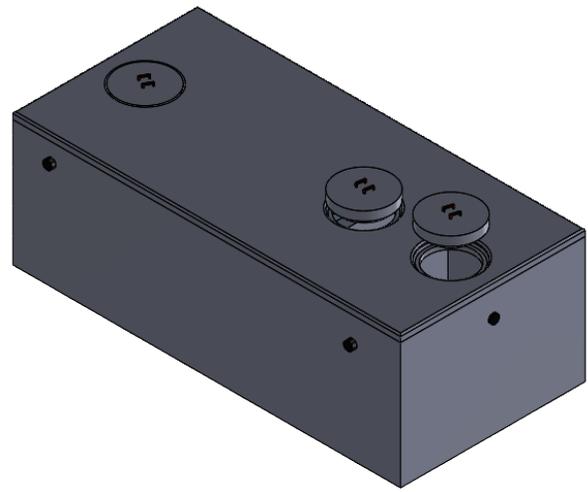

Available in H10
Or H-20 Loading

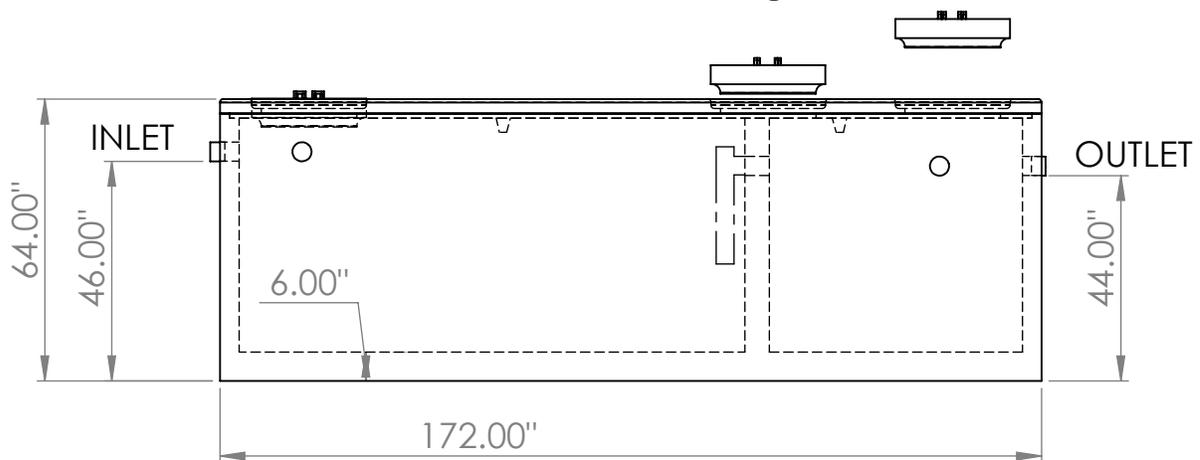

Specification

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE II PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT