
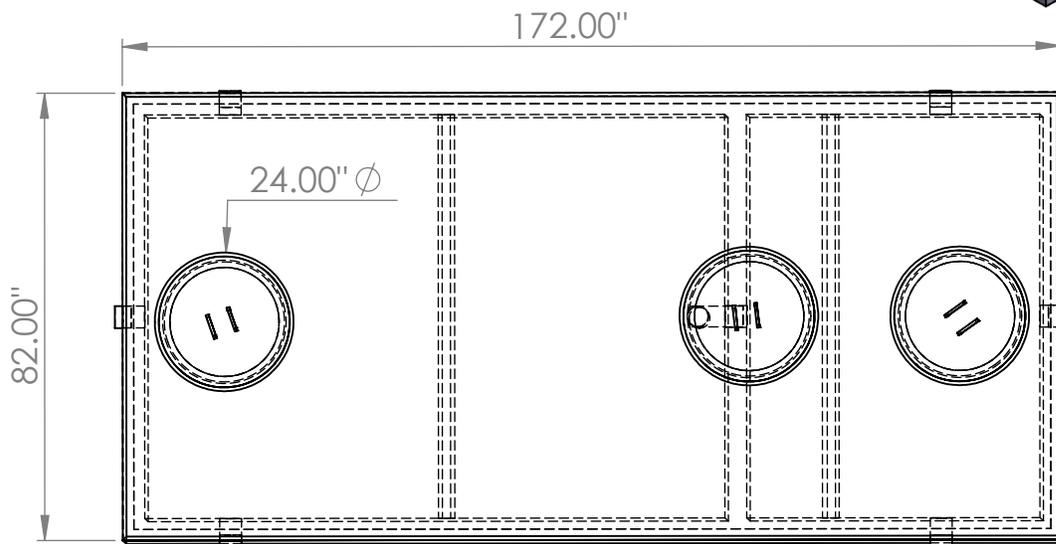


PEPIN PRECAST

59 Shaw Road, Sanford Maine
207-324-6125


WWW.PEPINPRECAST.COM

2,500 Gallon Two compartment
Weight: 23000 lbs

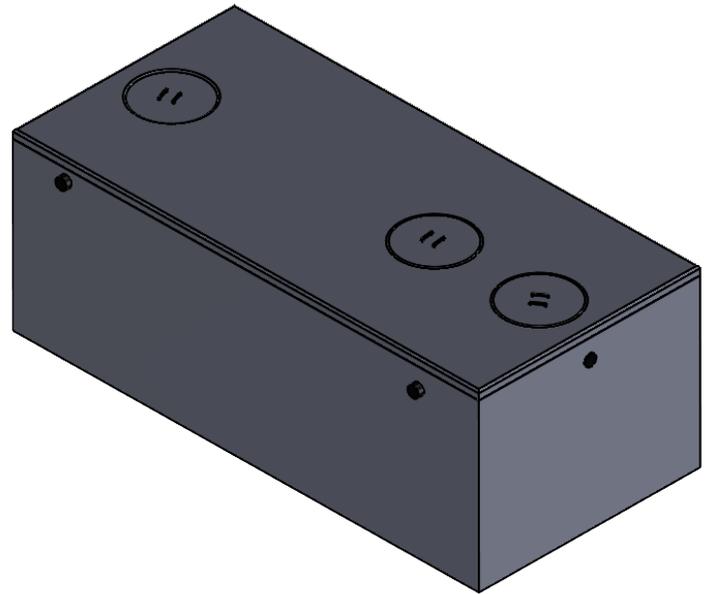

Rubber Boots on
All Inlets & Outlets

Available in H-10 Or H-20 Loading

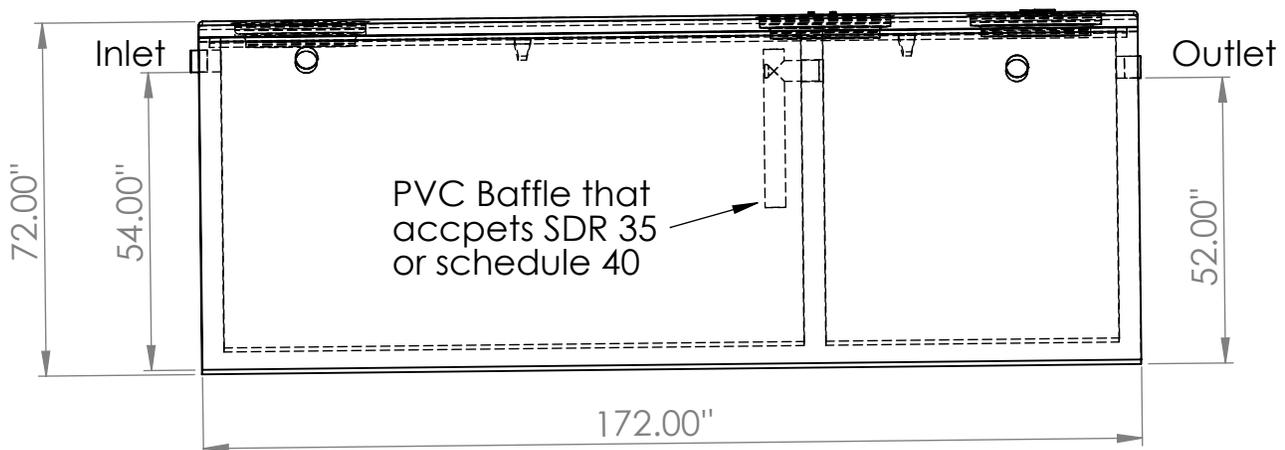

Specification

1. CONCRETE 5,000 PSI AFTER 28 DAYS
2. CEMENT PORTLAND TYPE II PER ASTM C150-81
3. STEEL REINFORCEMENT PER ASTM A-615. GRADE 60
4. DESIGN LOADING PER AASHTO HS-20
5. JOINTS SEALED WITH CONSEAL CS-102 BUTYL SEALANT