

9400 Series Surface Mounted Electric Strike

*Works with rim exit devices
up to 1/2" throw latchbolt*



The slim-line, surface mounted solution.

The HES 9400 series is a slim-line, outdoor rated surface mounted electric strike designed to accommodate rim exit devices with a 1/2" Pullman latch. All components are completely encased within its 5/8" thick stainless steel housing. No cutting on the frame is required for installation. Simply place the electric strike on the surface of the frame, align it with the exit latchbolt, and install.

The HES 9400 ships with a 1/8" spacer plate to accommodate varying door gaps. The HES 9400 exceeds Grade 1 standards for strength and performance. It is field selectable for fail secure/fail safe operation, and for 12 or 24VDC. The HES 9400 features a smooth cover to conceal the mounting screws and provide a sleek surface for superior looks.

Features

- Installs in metal and wood frames (wood screws not included)
- One 1/8" spacer plate included
- Decorative cover for sleek new look
- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance 1,000,000 cycles
- Field selectable fail secure/fail safe
- Horizontal adjustability
- Non-handed
- Internally mounted solenoid
- Accommodates up to 1/2" Pullman latch
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of SMART Pac® III extends the warranty to 10 years)

Options

- LBM Latchbolt monitor
- LBSM Latchbolt strike monitor

Accessories

- **9000-1xx** Spacer Plate
- **SMB** Surface Mounting Box
- **9000-ASB 1/2"** Aluminum Spacer Bracket
- **2005M3** SMART Pac® III
- **2001M** Plug-in Bridge Rectifier
- **2004M** ElectroLynx® adapter
- **2006M** Plug-in Buzzer
- **9000-MTK** Metal Template Kit



Grade 1

SecuriCare
WarrantyRim Exit
DevicesField Selectable
(Fail secure
/Fail safe)Dual Voltage
12/24Outdoor
RatedBurglary
Rated

9400 Series Surface Mounted Electric Strike

Certifications

- ANSI/BHMA A156.31, Grade 1
- RoHS Compliant
- UL 294 Listed
- UL 305 Listed
- UL 1034 Burglary-Resistant Listed and Suitable for Outdoor Use

Specifications


Frame Application

- Metal
- Wood

Electrical

- Dual voltage 12 or 24 VDC
- 500 mA at 12 VDC continuous duty
- 250 mA at 24 VDC continuous duty

Dimensions

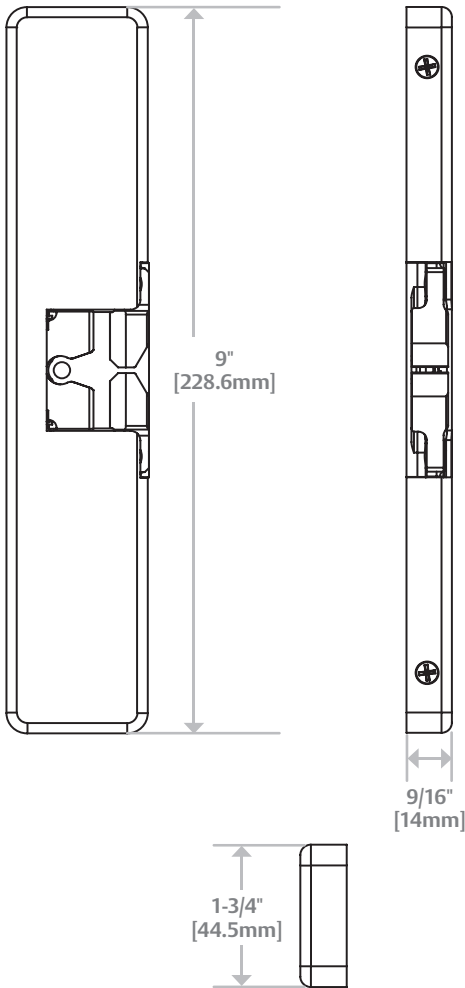

How to Order

SERIES		FINISH	OPTION (S)
9400		– 630	– LBM
9400	Surface-Mounted Electric Strike for 1/2" Pullman Rim Exit Devices; no faceplates required	605 Bright Brass	LBM Latchbolt Monitor
		606 Satin Brass	LBSM Latchbolt Strike Monitor
		612 Satin Bronze	
		613 Bronze Toned	
		613E Dark Oxidized Satin Bronze Powder	
		629 Bright Stainless Steel	
		630 Satin Stainless Steel	
		BSP Black Suede Powder	

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.