


GLYNN-JOHNSON®

Overhead
door holders
and stops



90 Series surface overhead door holders/stops

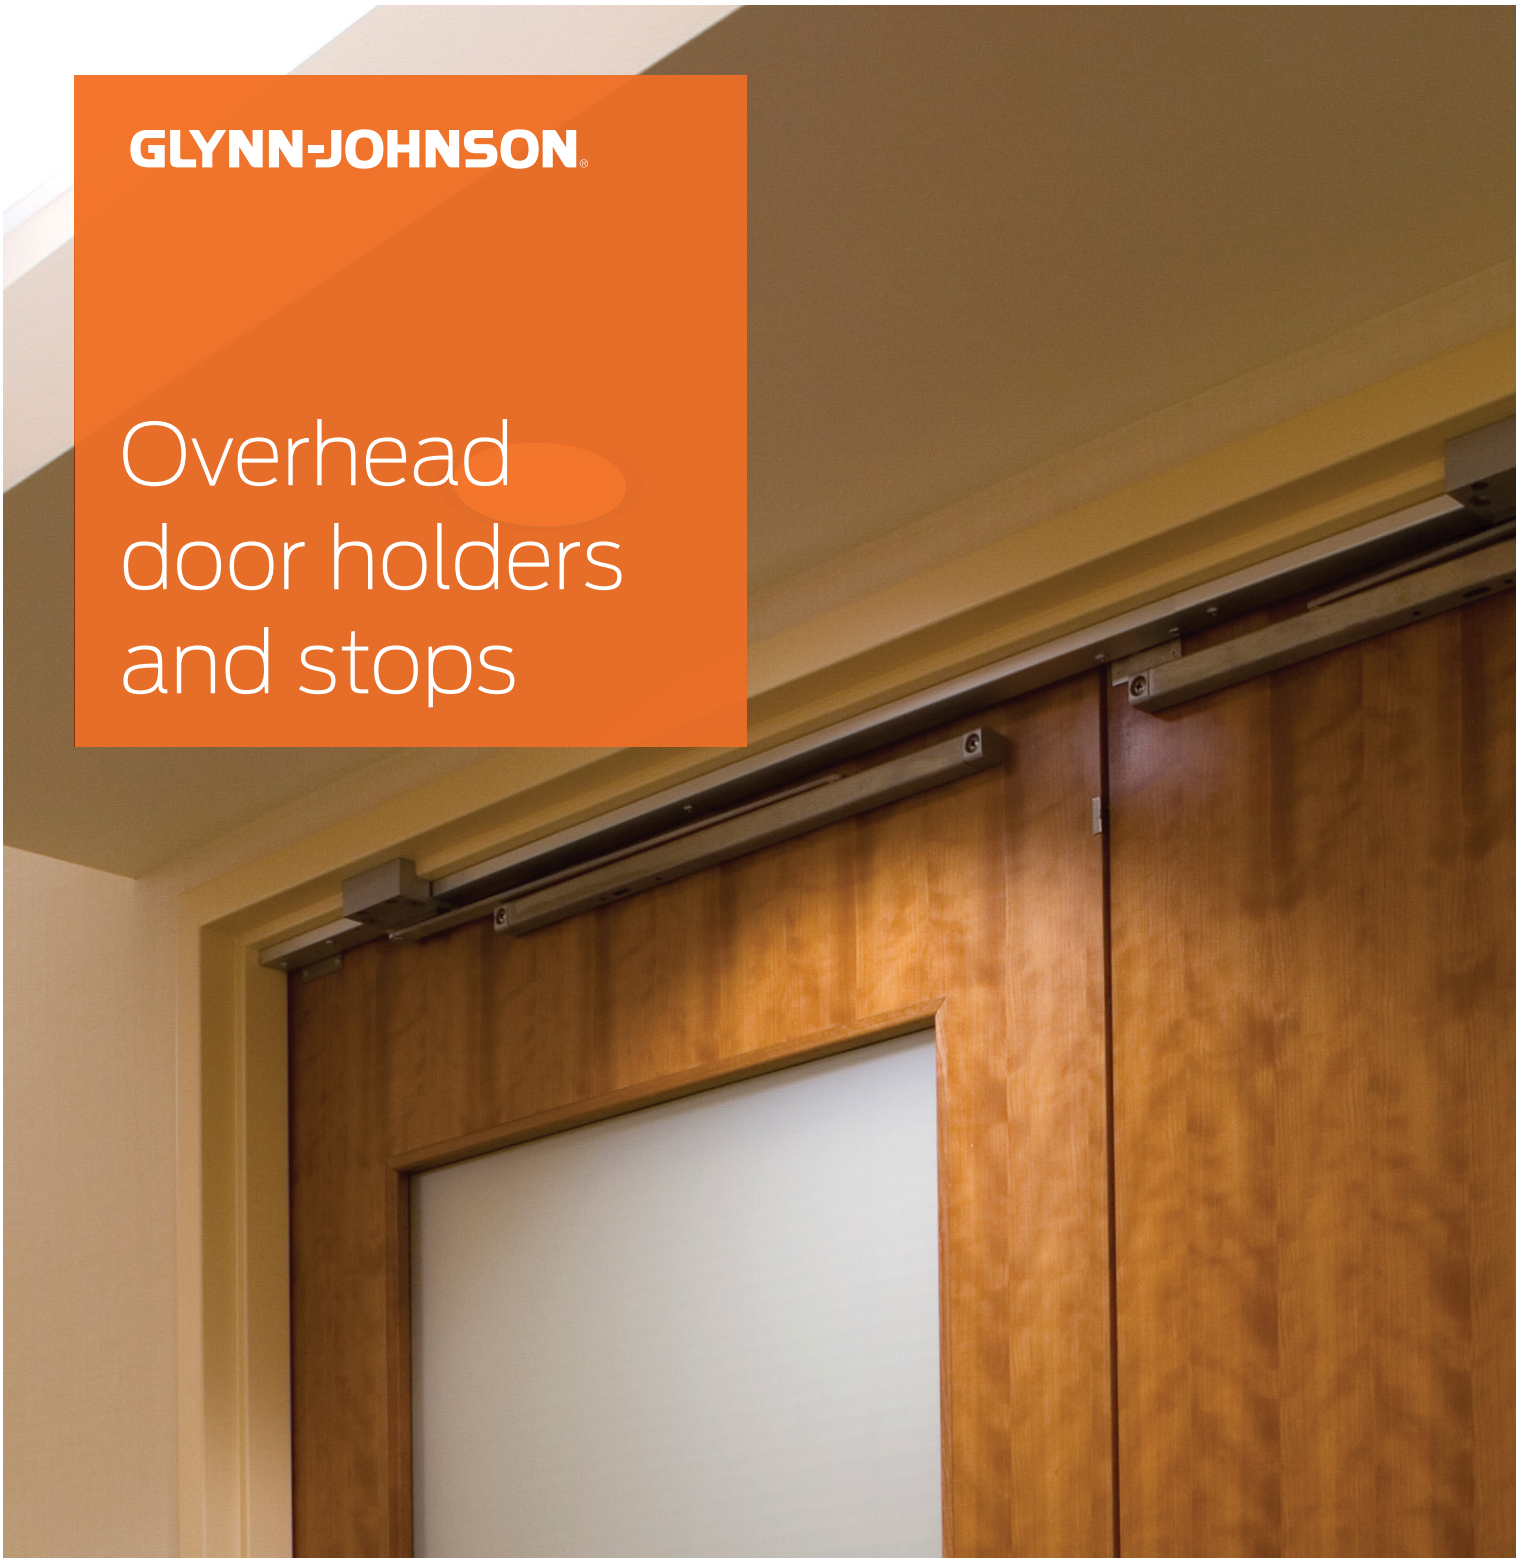

90 Series heavy-duty

Glynn-Johnson 90 Series holders and stops are the most rugged models available for heavy-duty applications. The channel is thru-bolted to the door with sex bolts, and the jamb bracket is surface mounted to the jamb, requiring minimal door and frame preparation.

These versatile units can be used in conjunction with most surface-applied door closers. The provided templates allow for variable mounting positions, ranging from 85° to 110° hold-open/stop angle. These templates are designed for installation in almost all types of doors, including doors with conventional butt-type hinges or specialty hinges.

Four models:

- 90H Series hold-open model
- 90S Series stop-only model
- 90F Series friction hold-open model
- 90SE Series special stop-only model

Five sizes:

- Simple
- Standardized
- Each model is available in five sizes

Three options:

- J—Angle jamb bracket
- SHIM—Blade stop shim kits
- SOC—Pin-in-socket security screw package

Unmatched convenience:

- Non-handed
- Improved compatibility with door closers
- Single-acting doors
- Interior/exterior applications
- Durable
- Easy to install
- Improved corrosion resistance
- Function conversion kits available

Materials and finishes

In 300 Series stainless steel, brass and steel substrates, these models are available in the largest selection of finishes in the industry. Stainless steel models offer the highest resistance to corrosion. Available in the following finishes:

BHMA	US	Finish description
605	US3	Polished Brass
606	US4	Satin Brass
612	US10	Satin Bronze
613	US10B	Oil Rubbed Bronze
619	US15	Satin Nickel
625	US26	Polished Chrome
643E/716	—	Aged Bronze, Blackened, Edge Relieved
652	—	Satin Chrome
706	SP4	Powder Coat Brass
691	SP10	Powder Coat Bronze
689	SP28	Powder Coat Aluminum
695	SP313	Powder Coat Dark Bronze
622	SPBLK	Powder Coat Black

Models

Glynn-Johnson 90 Series door holders and stops provide long-lasting protection for doors, frames and hardware. All models incorporate a heavy-duty channel/slide-arm design and offset jamb bracket. This unique design allows for simple field modification of functions, should user requirements change.

90H Series hold-open

(Suffix H) Hold-open models provide a convenient method of holding the door open at a predetermined position for short or long periods of time, permitting an unobstructed traffic flow through the opening. The hold-open function can easily be turned on or off by simply rotating the serrated knob on the bottom of the channel. This knob engages the hold-open mechanism, allowing the door to be held open at a predetermined position ranging from 85° to 110°. When the knob is flipped over, it acts as a stop and shock absorber.

The tension on the hold-open mechanism can be adjusted using a phillips screwdriver to offset air currents or other exterior conditions. The hold-open tension adjustment is located on the top of the slider in the channel.

90S Series stop-only

(Suffix S) When the hold-open function is not a requirement, stop-only models provide a reliable method of door control. Stop-only models provide the same shock-absorbing capability as hold-open models. The stop-only model may be used on fire doors.

90F Series friction hold-open

(Suffix F) Friction hold-open models are ideal for patient room doors, wardrobe and closet doors or similar applications where multiple hold-open positions are desired. The friction tension can be adjusted through the top of the channel using an Allen wrench. The friction tension adjustment is located on the top of the slider in the channel.

90SE Series special stop-only

(Suffix SE) When stop-only models are used in conjunction with single-point, hold-only electronic door closers, the stop-only function may be ordered without the shock-absorbing mechanism. Used as an auxiliary stop, these models prolong the life of the closer. The stop location is adjusted using an Allen wrench on the stop block located in the channel. The SE option cannot be added to an existing unit. It must be factory ordered.

Note: Caution should be taken when using this option in other applications, as the elimination of the shock-absorbing spring can put added stress on the door and frame.

Application Information

UL Classification

The 90 Series stop-only models are classified by Underwriters Laboratories (UL) as miscellaneous fire door accessories. This classification applies to use on either hollow metal fire doors or wood fire doors. These units may be used on doors of any rating. As a reminder, the miscellaneous fire door accessories (GVUX) section is defined by UL as: "Miscellaneous fire door accessories are intended in the individual listings. The accessories have been investigated to determine that when installed in accordance with the manufacturer's instructions, the accessories do not adversely affect the fire rating of the fire door and/or fire door frames."

Dead-stop templating

Dead-stop templating is recommended for applications where a wall or similar obstruction is placed at an opening angle of 110° or less (i.e., doors that open back-to-back). Dead-stop templating can be applied to hold-open, stop-only and friction models. The dead-stop position is the point at which the shock-absorbing spring is fully compressed. Therefore, when dead-stop templating is used, the initial degree of opening will be 5° to 7° less than the dead-stop opening.

Example: If the holder is templated to a 100° dead-stop, the door will hold open at an angle between 93° and 95° but no further than 100°.

Note: Do not use dead-stop templating on the 90SE Series since there is no shock-absorbing spring.

Environmental considerations

Environmental factors should always be considered when specifying overhead holders and stops. Doors that are positioned on a building's exterior or subject to corrosive conditions should be equipped with a holder constructed primarily of stainless steel or brass materials. For interior applications, steel is acceptable, though brass substrates generally provide a more attractive architectural-grade finish.

Options

Suffix J (angle jamb bracket)

An angle jamb bracket is available for converting standard models to hinge-side or flush transom mounting. The angle jamb bracket affixes to the standard jamb bracket. If ordered with the unit add suffix J. If needed separately order 90J by finish needed.

Suffix SOC (pin-in-socket security screws)

A screw package with pin-in-socket screws for mounting the door bracket and the jamb bracket is provided instead of the standard screw package.

Suffix SHIM (blade stop shims)

Shim kits are available in 3 sizes


90 SHIM1 is a 1/4" shim kit

90 SHIM2 is a 1/2" shim kit

90 SHIM3 is a 3/4" shim kit

If ordered with overhead, add suffix SHIM (1, 2 or 3). If needed separately order 90 SHIM (1, 2 or 3)–finish.

90 Series surface overhead door holders/stops

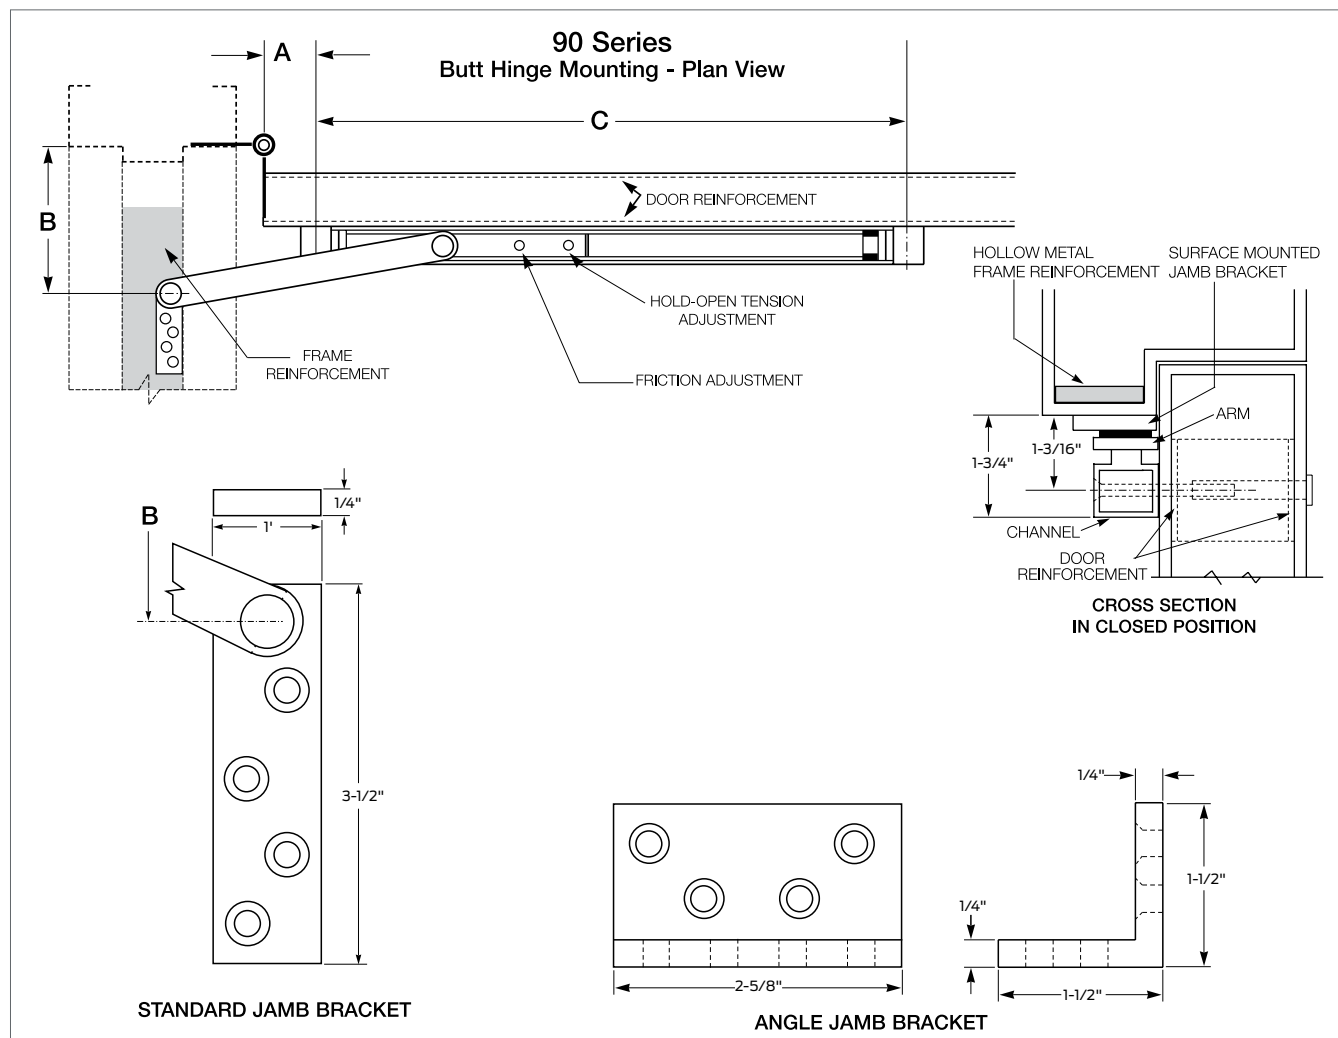

90 Series sizing chart

Butt/offset pivots

Size	Door opening	Stop only	Hold open	Friction
1	-	-	-	-
2	23 1/16" - 27"	902S	902H	902F
3	27 1/16" - 33"	903S	903H	903F
4	33 1/16" - 39"	904S	904H	904F
5	39 1/16" - 45"	905S	905H	905F
6	45 1/16" - 54"	906S	906H	906F

Center hung

Door opening	Stop only	Hold open	Friction
-	-	-	-
27 1/16" - 33"	902S	902H	902F
33 1/16" - 39"	903S	903H	903F
39 1/16" - 45"	904S	904H	904F
45 1/16" - 51"	905S	905H	905F
51 1/16" - 57"	906S	906H	906F

BHMA/ANSI, A156.8 and Fed. spec. cross reference

G-J model	BHMA*	Fed. spec.
902-906 H	C02511	1161
902-906 S	C02541	1161A
902-906 F	C02531	-

* First numeral (0) designates optional material.

To specify:
 Brass material, change 0 to 1 (i.e. C12511)
 Stainless steel material, change 0 to 5 (i.e. C52511)
 Steel material, change 0 to 8 (i.e. C82511)

Note: This chart illustrates the most common types of hinging and door opening sizes.
 For unusual door details, contact Glynn-Johnson for availability.

The template information on this page is for reference only and is not intended to serve as an installation template.
 For more information, reference the Template Directory in the Document Library at us.allegion.com.



How to order

		90		4		H	—	US32D	—	J
Overhead Series:										
90										
Size (door opening using butt or offset pivots):										
2	(23 1/16"–27")									
3	(27 1/16"–33")									
4	(33 1/16"–39")									
5	(39 1/16"–45")									
6	(45 1/16"–54")									
Function:										
H	Hold-open									
F	Friction hold-open									
S	Stop-only									
SE	Special stop-only									
Finishes:										
BHMA	US	Finish description								
605	US3	Polished Brass								
606	US4	Satin Brass								
612	US10	Satin Bronze								
613	US10B	Oil Rubbed Bronze								
619	US15	Satin Nickel								
625	US26	Polished Chrome								
643E/716	—	Aged Bronze, Blackened, Edge Relieved								
652	—	Satin Chrome								
706	SP4	Powder Coat Brass								
691	SP10	Powder Coat Bronze								
689	SP28	Powder Coat Aluminum								
695	SP313	Powder Coat Dark Bronze								
622	SPBLK	Powder Coat Black								
Options:										
J	Angle jamb bracket									
SHIM	Blade stop shims									
	SHIM 1 1/4" kit									
	SHIM 2 1/2" kit									
	SHIM 3 3/4" kit									
SOC	Pin-in-socket security screws									