

PROVIDENCE REVOLVING FUND
Sewer & Heating Contractor Bid Form
51 Barrows St, Providence, RI

ITEM	COST
<u>GENERAL REQUIREMENTS:</u> Contractor shall be responsible for obtaining any necessary permits for any and all work as is required by local and national and local code or jurisdiction requirements. Contractor shall also be responsible for any necessary drawings that may be required to obtain permits. Contractor shall be responsible for any required submittal to local authorities. Contractor shall be responsible for maintaining copies of any required permits at the job - site, and to supply Consultant copies of as requested. Contractor shall be responsible for supplying any bonds, insurance cert's, sub - contractor licenses, EPA licenses, specialty licenses to building departments and consultant. All documents shall be delivered in a timely fashion. Contractor shall apply for permits as soon as possible.	\$
<u>SEWER LATERAL REPLACEMENT:</u> Contractor to full open trench for excavation of driveway. Approximately 95 linear feet from house to house trap to street manhole connection. Contractor to remove old sewer lateral and dispose. Lay new PVC (contractor to size). Remove existing house trap entirely, connect new PVC straight through. Connect PVC to termination point. Backfill and compact trench in driveway area. Contractor to contact Dig Safe prior to any work starting. See attached municipal sewer drawings.	\$
<u>HOT WATER TANKS:</u> Contractor shall furnish and install new 50 Gallon gas fired tanks. Systems shall be installed with drip pans and required expansion tanks. Hot water tank shall be install with spacers to keep unit off floor. New hot water tank shall have proper plumbing and electrical connections if applicable. Flue for gas unit shall be properly run with correct pitch and sealed at mechanical connections and at chimney. New tank shall be installed as close to a floor drain as is practical. Plumbing connections shall be with die-electrical fittings. Supply line shall have shut off valve near top of unit. Tank shall be installed with hot/cold ground for plumbing if metal plumbing is used.	\$
TOTAL:	\$

All work shall be completed in a Good Workmanship Like Fashion, and within industry standards. All work shall be in accordance with national and local code requirements. All material and labor shall be warranted where applicable. All dimensions, aerial measurements, drawings and square footage estimates provided by PRF, are for general references, scoping, and budgetary guidance purpose only. PRF does not guarantee the absolute accuracy or field readiness of these preliminary metrics. Contractor bears sole and absolute responsibility for performing their own comprehensive on-site field measurements and final physical verifications prior to ordering, fabricating, or purchasing any project material.


Contractor: _____

Date: _____

License No: _____

179-40



Bend St

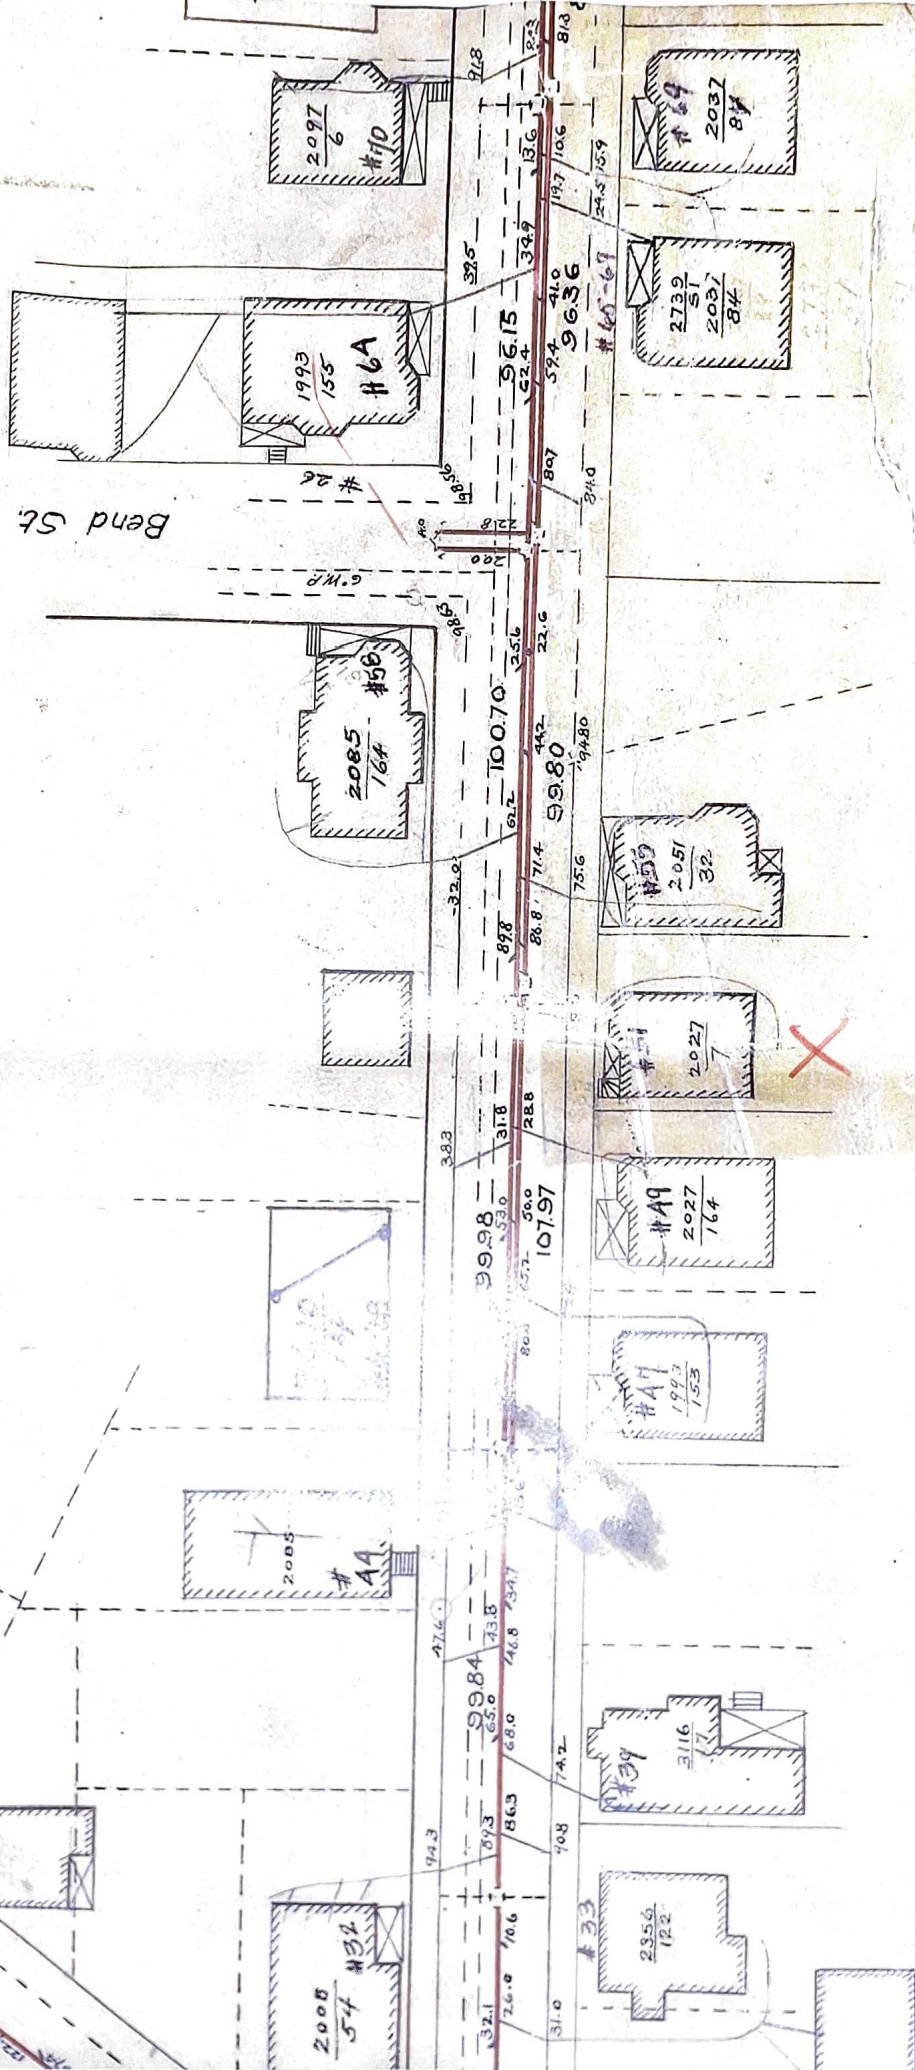


Caroline S. Hopkins
 51 Barrows Street
 Geo. D. Smith D.A. Permit No. 24695
 Opened Sept. 13-1915. 5" Pipe from curb
 Closed " 15-1915 End at curb 1

Platted

Proposed S. side of Barrows St.
 11.5' 7.2' 6' 2.5' 3.6' 1.5'

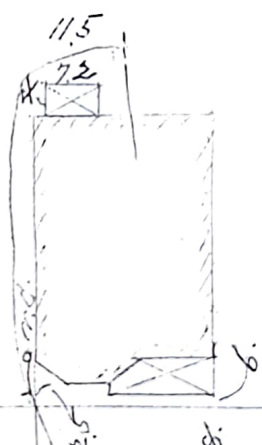

Barrows Street
 Enter sewer into 1st man hole
 North of Bend Street

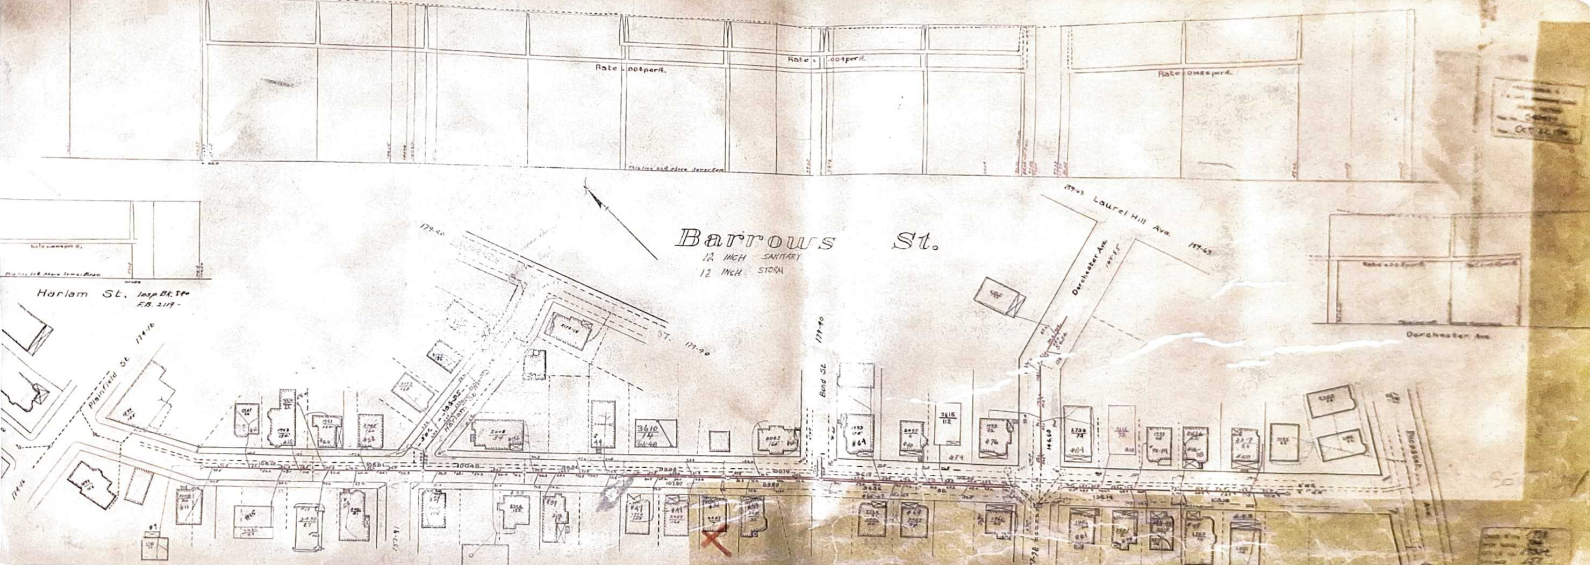

Barrows St.

12 INCH SANITARY
12 INCH STORM

Laurel Hill Ave.

Dorchester Ave.

Harlam St. 100 ft. 5 ft. 2 ft. 1 ft.

ST. 177-90

Bond St.

Dorchester Ave.

X