


T14000 Series Storefront

Single cavity pour and debridge thermal barrier

For optimal strength and thermal performance, use Tubelite's 14000 Series Storefront Framing, a flush-glazed system for use on storefront and low-rise applications. Framing is available in standard single cavity pour and debridge thermal barrier members with 2" x 4-1/2" profiles for use with glass or panels up to 1-1/8" thick. Extra-heavy intermediate verticals are available for high performance against strong windloads.

Reduce project labor costs with the flexibility of inside or outside glazing. Members can be assembled using screw spline or clip joinery. Our redesigned storefront systems are based on #12 screw fasteners which greatly decrease rework in the field. Framing is compatible with Tubelite Narrow, Medium and Wide Stile Doors.

Our 14000 Series Storefront products are subjected to thorough testing by an independent laboratory, ensuring that you get the highest quality storefront framing products that the industry has to offer.

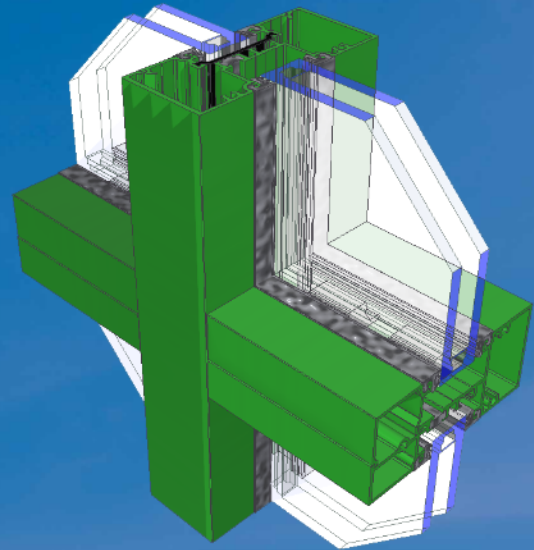

**Standard Medium
Stile Entrances**



**200 Series
Curtainwall**

**ALSO
USED
WITH**




Wendy's, Cemetery Road, Hilliard, OH


TUBELITE®
DEPENDABLE

T14000 Series Storefront


Single cavity pour and debridge thermal barrier

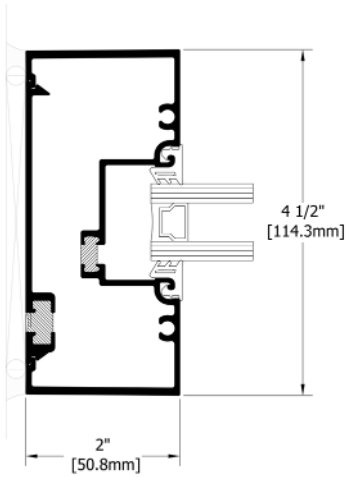

Standard Jamb

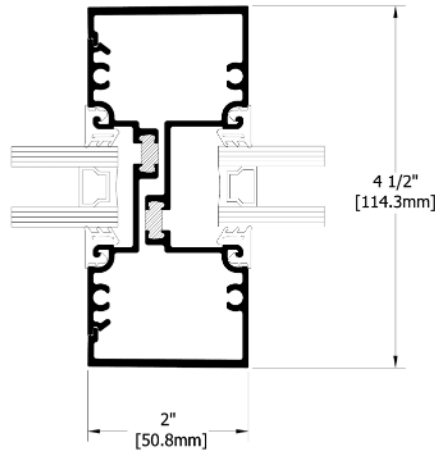

Standard Vertical

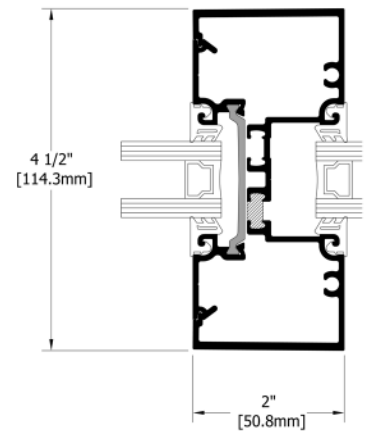


Optional Vertical

System Features:

- Standard 2" (50.8mm) sight-line on verticals and horizontals
- 4-1/2" (114.3mm) system depth
- Single cavity pour and debridge thermal barrier
- EPDM roll in gaskets for 1" glass or panel thickness, standard
- Glass centered in the system depth
- #12 screw construction

Optional Features:

- Screw-spline or shear block connections
- Steel reinforcing if required
- Easily integrates with standard or thermal doors, operable vent windows & sun shades
- A wide variety of standard anodized and painted colors are available to complement any project with warranted protection, as well as street appeal.
- Curved Headers

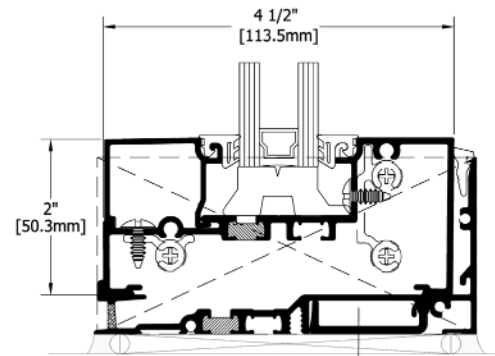

Standard Sill

T14000 Series Product Specifications

Application: Low-rise commercial buildings: retail, office, healthcare, schools, etc.

Description: 2" x 4-1/2" center set, outside or inside flush glazed storefront

Face Width:	System Depth:	Glass:	Air Infiltration:	Water Infiltration:	Structural:	CRF:	U-Factor**:	Acoustic:
2"	4-1/2"	1" std (1/8" – 1-1/8")	0.06 CFM/Ft.2 @ 6.24 PSF	12 PSF – Static 12 PSF – Dynamic	30 PSF – Design 45 PSF – Overload	T (Thermal) 71 _F 73 _C	0.32 - Thermally Broken (Strutted Filler)	STC 31 OITC 25

** U-Factor per AAMA 1503-09: COG = 0.24.

Glass Makeup: 1" IGU – 1/4" SNX62/27 #2, 1/2" Argon with warm edge spacer, 1/4" clear

DISCLAIMER: Tubelite takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Tubelite's sole discretion. ©2024 Tubelite

11052024