


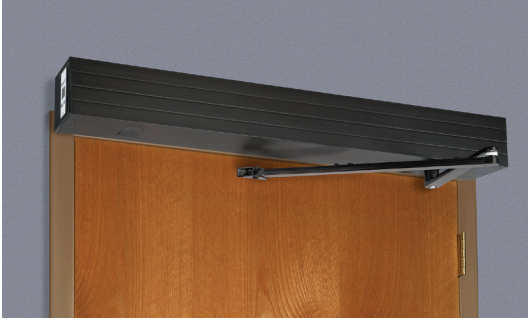

# SimpleSwing (SS8200)

## Heavy Duty – Low Energy Operator

The Record SimpleSwing (SS8200) is a heavy duty low energy operator that can be specified for almost any interior or exterior application.

Everything needed to program and interface with most applications involving push buttons, access control, electric strikes and other electrified hardware is included.

The SimpleLynk communications display allows the installer to properly set-up and program the door operator onsite. On-board programming and diagnostics allow easy servicing by displaying the current status of the operator.

Available in push or pull, clear or dark bronze for single, pair or dual egress configurations.

### Complies with the following standards.

ANSI/BHMA A156.19, UL325, UL228, UL10C.

### Product features

Quiet Operation

SimpleLynk Display


One Button Set-Up

Push or pull same unit

Software Based Control


Electric Latch Assist assures closing in areas with heavy stack conditions

# SS8200 Profile



## Arms


Track Arm (supplied standard)



Standard Arm



Offset Arm

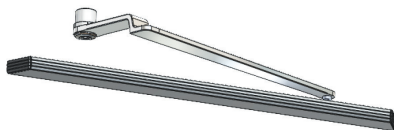

## Standard Features:

- » Surface Mounted
- » Push or Pull Same Unit
- » Non-handed
- » Various Arm Options Available
- » Single, Pair Doors or Dual Egress
- » Clear or Dark Bronze

## Technical Specs/Data

|                                   |                                                        |
|-----------------------------------|--------------------------------------------------------|
| Header Size                       | 5 1/2" x 4 1/2"                                        |
| Motor Type                        | 1/4 hp                                                 |
| Electrical Requirements)          | 120 VAC @ 15 amps 60hz                                 |
| Simplelynk Communications Display | Yes                                                    |
| Max Door Weight                   | 400 lbs (on 48" door)                                  |
| Max Door Width                    | 48" single, 99" dual                                   |
| Operating Conditions              | -40°F and +140°F                                       |
| Power Supply                      | 24V DC @ .5 amp for maglocks, electric strikes         |
| Manual Opening/Closing Force      | Adjustable 5 to 15 lbs.                                |
| Opening Angle - Track Arm         | 90 degrees                                             |
| Opening Angle - Standard Arm      | 130 degrees                                            |
| Push Reveal                       | Up to 12" with standard arm<br>Up to 3" with track arm |
| Pull Reveal                       | Up to 6" with standard arm<br>Up to 6" with track arm  |


Technical data subject to change without notice.



ADA



low energy



push or pull



fire rated



UL 325



24 VDC