


2cm Porcelain Tile Pavers




PORCELAIN MOONSTONE PAVERS




PORCELAIN MONOCHROMATIC BASALT, ASH, BONE



12 X 12
(H) $\frac{3}{4}$ " x (D) $11\frac{3}{4}$ " x (L) $11\frac{3}{4}$ "



12 X 23
(H) $\frac{3}{4}$ " x (D) $11\frac{3}{4}$ " x (L) $23\frac{1}{3}$ "



23 X 23
(H) $\frac{3}{4}$ " x (D) $23\frac{1}{3}$ " x (L) $23\frac{1}{3}$ "

Not all sizes come in all colors.
See an associate to confirm availability.

2cm Porcelain Tile Pavers

COLLECTIONS

COTTA




COTTO


ICON TRAVERTINE



ANDES
CAPPUCCINO



ANDES SHELL



ANDES SILVER



PEARL



RIVER



TIVOLI'S AVORIO



TIVOLI'S CREMA



TIVOLI'S WALNUT

MONOCHROMATICA



ASH



BASALT



BONE




COGNAC



SAND

OCEAN STONE



BLACK



WHITE COOL



TAN

PRIMA MATERIA



CEMENTO




CENERE




SANDALO

PENNSYLVANIA BLUESTONE

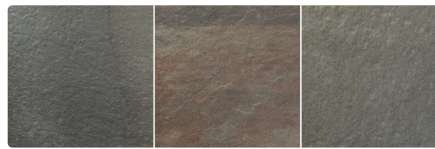

FULL COLOR CLEFT PATTERN

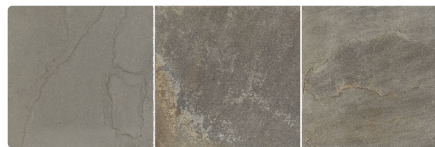


TRUE BLUE THERMAL PATTERN

QUARTZITE



CLOUD



CRYSTAL WHITE



LAGUNA



SANDY ISLAND

STONE



CREAMSTONE




MOONSTONE



MULTICOLOR

TERRAZO




CHARCOAL




COOL GREY



COOL WHITE



WHITE BLACK



GREY BLACK

WOOD



BROWN



GREY



IPE



IVORY



TEAK

Not all sizes come in all colors.
See an associate to confirm availability.

2cm Porcelain Tile Pavers

TECHNICAL CHARACTERISTICS

CHARACTERISTIC	ASTM METHOD	INDUSTRY STANDARD	EN METHOD	ISO METHOD	INDUSTRY STANDARD	
Thickness	ASTM C 499	-		ISO 10545-2	-	¾"
Weight	-	-			-	9 lb/sq. ft
Water absorption	ASTM C 373-88	≤ 0,5%		ISO 10545-3	E ≤ 0,5%	≤ 0.1%
 PORCELAIN CERTIFIED TILE	ASTM C 373	0,5%				Meeting the water absorption criteria of the American national standard PTCA
Breaking strenght	ASTM 1505	2000 lbf (10.9 kN)		ISO 10545-4	Sp > / = 7,5mm S > / = 1300 N	> 2500 lbf
Moduls of rupture	-	-		ISO 10545-4		> 7000 psi
Static load capacity (24"x24" pavers)	-	-	EN 12825		center side center diagonal	> 1700 lbf > 1200 lbf > 1500 lbf
Dynamic load capacity - hand object impact test	-	-	EN 12825		-	Test not passed
Dynamic load capacity - soft object impact test	-	-	EN 12825		-	Test Passed
Bending strenght	-	-	EN 1339		Kn 14,38	Class 14
Impact resistance	-	-		ISO 10545-5	-	> 0.55
Resistance to abrasion	ASTM C 1243-93	Surface wear-resistance properties of glazed vitreous and porcelain tiles		ISO 10545-6	< 175 mm ²	conforms
Frost resistant	ASTM C1026	A tile sample is subjected to repeated porcesses of freezing and thawing. Sample must show no visible defects.		ISO 10545-12	requested	resistant
Resistance to thermal shock	ASTM C 484	requested		ISO 10545-9	requested	resistant
Resistance to chemicals	ASTM C 650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. No sample show visible defects.		ISO 10545-13	UB min	UA
Resistance to acids and alkalis	-	-		ISO 10545-13	-	ULA/UHA
Resistance to staining	ASTM C 1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recirdedpost cleaning		ISO 10545-14	-	Class 5
Fire resistance	-	-	EN 3501-1		-	A1-A1 FL
Barefoot ramp test	ANSI A 326.3	-		DIN 51097	-	A+B+C
Shod ramp test	-	-		DIN 51130	-	R11
Dynamic coefficient of friction	ANSI A137 / ASTM A326.3	-		BOT 3000	-	> 0.60 wet > 0.60 dry
Slip resistance	-	-		DM 236/89 B.C.R.A.	-	> 0.40