


17 (400)

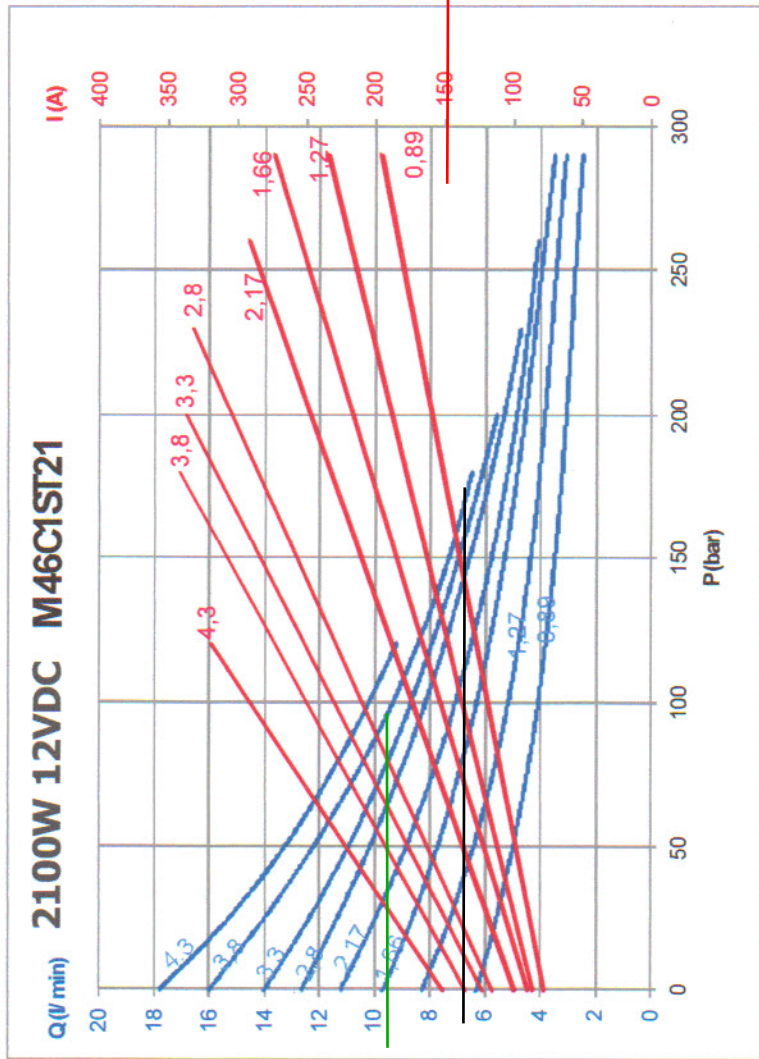

at 150 amps S2 value is 6 minutes maximum continuous run time. S3 is at 16% so 6 minutes must be 16% of total maximum cycle.

A 6 minute run time at 150 amps, would need a 31 minute cool time.

A 3 minute run time at 150 amps would need a 15 minute cool time.

A 1 minute run time at 150 amps would need a 5 minute cool time.