UTILITY FLEET SOLUTIONS | 178 Muddy Creek Church Rd. Denver, PA 17517

Phone: 800.952.4228 Web: MGSUtilityFleet.com

ECF20045


15.5K THREE REEL CABLE TRAILER

GENERAL

- GVWR: 22,000 Lbs.
- GAWR: 10,000 Lbs. (*per axle*)
- Estimated Empty Weight: 6,480 Lbs.
- Total Capacity: 15,520 Lbs.

OVERALL DIMENSIONS

- 280 9/16" L x 96 9/16" W x 76 3/16" H
- Hitch: 3" Towing Eye, 4 Bolt, Adjustable, 60K Lbs. Gross Trailer Weight
- Safety Chains: 1/2" Grade 70 Steel Chain with Clevis Hooks & Safety Latches

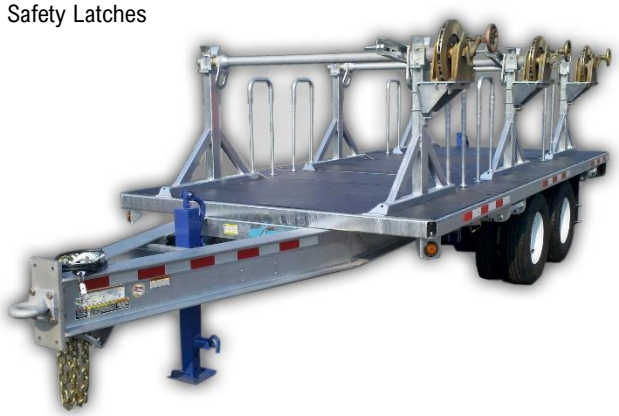

RUNNING GEAR

- Tires: ST235/85R x 16 LRE Dual
- Wheels: 16" x 675" 8 Bolts on a 6.5" Bolt Circle
- Brakes: Electric
- Axles: 10,000 Lbs. Underslung Type

FRAME

- Frame Rails: 10" x 26" Beam ASTM A36
- Cross Members: 7 Gauge HR Sheet ASTM A569

REEL CARRIER

- Reel Size: (3) 72" Maximum Diameter x 52" Maximum Width
- Reel Shaft: (3) 2 1/4" Diameter with 16" ventilated Bronze Manual disc Brake

ELECTRICAL

- Wire Harness: No Internal Splices, Enclosed in Protective Loom
- Breakaway system: To Federal DOT Standards with Solar Maintainer
- Electrical Connection: 7 Pin Plug
- Lighting / Conspicuity: Lighting to Federal DOT Standards, Conspicuity Tape Where Practicable

FINISH

- Body: Hot Dipped Galvanizing
- Preparation: Iron Phosphate Conversion Treatment, Chromium-Free Post Treatment
- Primer: Epoxy Ester High Solids Primer
- Topcoat: Polyurethane Two Component High-Solids Enamel

OTHER

- Tongue Jack: 10,000 Lb. Capacity Drop Foot, Top Wind
- Registration Holder: Water Resistant
- Stabilizer Jacks: (2) 10K Capacity, Drop Foot, w/ Side Crank

Special Features:

(4) Fold Out Steps, (6) Multi-Position Handrails, Non-Skid Treatment Applied to all Walking Surfaces, Suitable for Overhead or Underground, Optional Retrievers on all Reels