
UTILITY FLEET SOLUTIONS | 178 Muddy Creek Church Rd. Denver, PA 17517

Phone: 800.952.4228 Web: MGSUtilityFleet.com

EMU20316

13.7K Capacity Pole/Reel/Cargo - 50' max pole

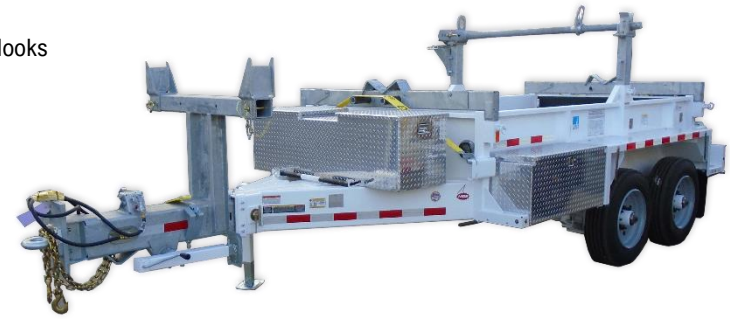

GENERAL

- GVWR: 19,220 Lbs.
- GAWR: 19,220 Lbs.
- Estimated Total Capacity: 13,780 Lbs.
- Hitch: 3" Towing Eye, 4 Bolt, 60K
- Safety Chains: 3/8" Grade 70 Chain & Grade 70 Hooks

OVERALL DIMENSIONS

- Retracted: 246" L x 96" W x ½" H
- Extended: 363" L

RUNNING GEAR

- Tires: 215/75R x 17.5 LRH
- Wheels: 17.5" x 6.75", 8 Bolts
- Brakes: Air – ABS Equipped 2S-1M, Spring Brake Release, Auto Slack Adjusters
- Axles: 10,000 Lbs. Sprung

FRAME

- Frame Rails: 10" x 4" x 3/16" Wall Rectangular Tube
- Stringers: 3" x 2" x 3/16" Wall Rectangular Tube
- Cross Members: 5" x 3" x 3/16" Wall Rectangular Tube

TONGUE

- Extendable Tongue: 8" x 8" x ¼" Wall Square Tube Inside 72" L x 10" W x 10" H Square tube Socket with Sintered Bronze slide Bushings at Both Ends
- Flexible Cable Carrier to Protect Air Lines &/or Wiring

BED

- Bed Dimensions: 128" L x 65" W x 9" H
- Full Tailgate Opens 90° or 180°
- (3) Stake Pockets Per Side (*for pole bunks & optional reel supports*)
- Removable Pole Bunks with Integral Pole Hubs (PVC coated) & (1) – 4" Winch Strap/each "M" Style Pole Rests, Rectangular Structural Tube Bunk Construction

OPTIONAL REEL CARRIER

- Reel Size: 80" Minimum Diameter x 48" Minimum Width
- Spindle Bar: 2 ½" Diameter with Integral Power Arm, Tapered Collar & Lift Points
- 9" Overspin Disc Brake

ELECTRICAL

- Four Taillight System Using Peterson LED Grommet Mount Lights
- Light Bar for Attaching to Pole Included
- Conspicuity & Lighting to DOT
- Electrical Connection – 7 Way J560 Spec.

FINISH

- Wet coat & Hot Dipped Galvanized