

HY 30.1000



Gru automontante

*apertura torre-braccio idraulica
tempo di montaggio: minuti 7*

Self erecting crane

*hydraulic tower-arm opening
assembly time: minutes 7*

Schnellmontage Kran

*Hydraulische Öffnung vom Turm-Ausleger,
Montagezeit: 7 Minuten*

Grue montage rapide


*ouverture tour-bras hydraulique
temps de montage: minutes 7*

CIBIN GRU srl
CASSANO MAGNAGO (VA)







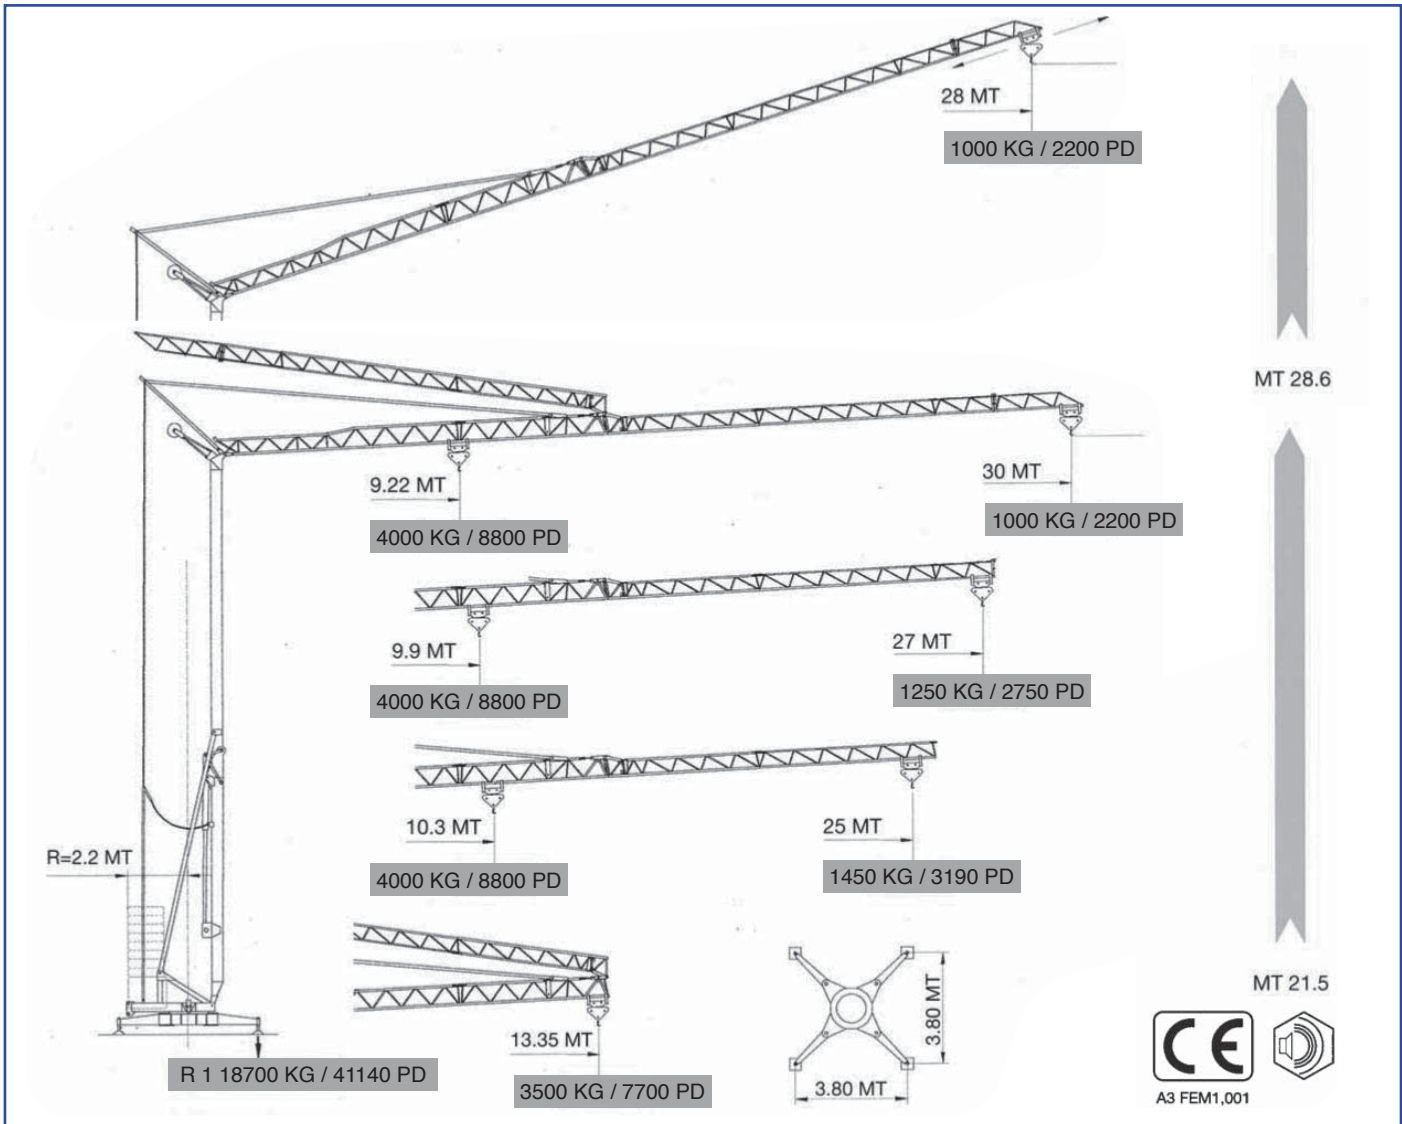











COSTRUZIONE MACCHINE EDILI
www.cibingru.net - info@cibingru.net






Curve di carico - Load curves - Lastkurven - Courbes de charges

		MT	9.22	12	16	20	24	28	30
		KG	4000	2909	2000	1622	1307	1087	1000
		PD	8800	6399.8	4400	3568.4	2875.4	2391.4	2200
		MT	9.9	12	16	20	24	27	
		KG	4000	3182	2259	1779	1436	1250	
		PD	8800	7000.4	4969.8	3913.8	3159.2	2750	
		MT	10.3	12	16	20	24	25	
		KG	4000	3359	2388	1881	1521	1450	
		PD	8800	7389.8	5253.6	4138.2	3346.2	3190	
		MT	12	13.35					
		KG	4000	3500					
		PD	8800	7700					

- Braccio impennato • Luffing jib
- Ausleger in Steilstellung
- Fleche relevée

1000 KG
2200 PD
cost

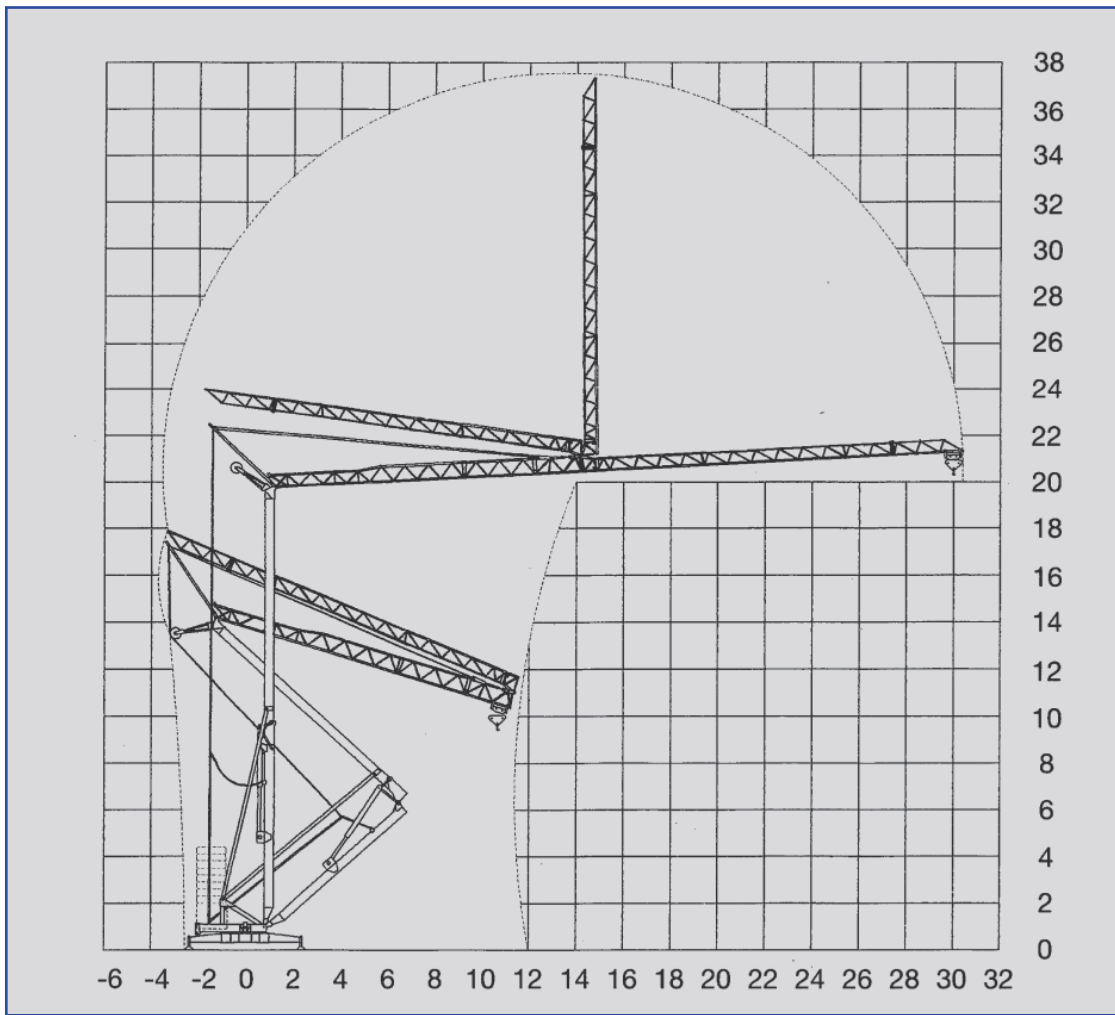












Ingombro
di montaggio

Space requirement

Abmessungen

Encombrement
au montage

HY 30.1000		m/min	kw	cv	kg T.	⚡	
		5	1.8	2.5	2000	V	220 / 380
		20	6.7	9	2000	HZ	50 / 50
		40	8.2	11	1000	KW	13 / 13
		2.5	1.8	2.5	4000		
		10	6.7	9	4000		
		20	8.2	11	2000		
		18/36	1.5/2.2	2/3			
	t/min	0-1 progressif	2.2	3			






Peso della gru senza assali - Dead weight without axles
Konstruktionsgewicht ohne transportachse - Poids de construction sans essieux

10800 KG
23760 PD


Trasporto - Transport

HY 30.1000


su strada - road - strasse - routier



su camion - on lorry - auf lkw - sur camion

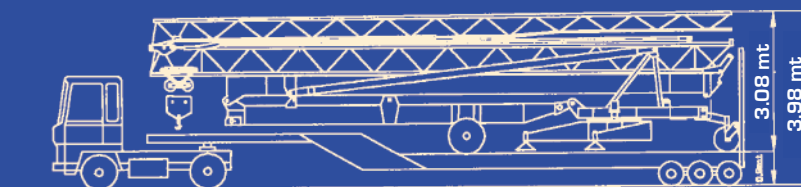

container open top 40'

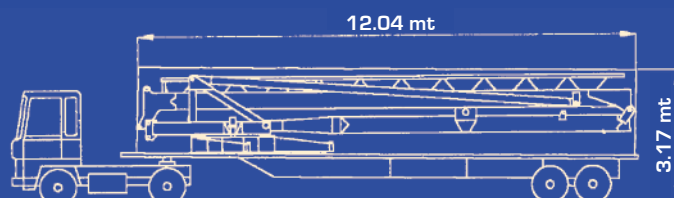

Uffici:
25011 Calcinato (BS) - Italy
Via A. Maestri, 10
tel. (0039) 030-9964792
fax (0039) 030-9985876

Sede operativa:
21012 Cassano Magnago (VA) - Italy
Via Cellini, 6
tel. (0039) 0331-791022
0331 248923
0331 245206
fax (0039) 0331-752986

info@cibingru.net
www.cibingru.net

