
S:\TELETEK JOB FILES\JOBS 3701-3750\3746 - TOWERCO - KY0120 LV LAGRANGE NORTH\DETAILING\CONSTRUCTION\3746-FOUNDATION\3746_TOWERCO-KY0120_LV LAGRANGE NORTH-FOUNDATION _OCT2026_REV0.DWG LAST UPDATE : 2026-10-05



PROXIMITY MAP

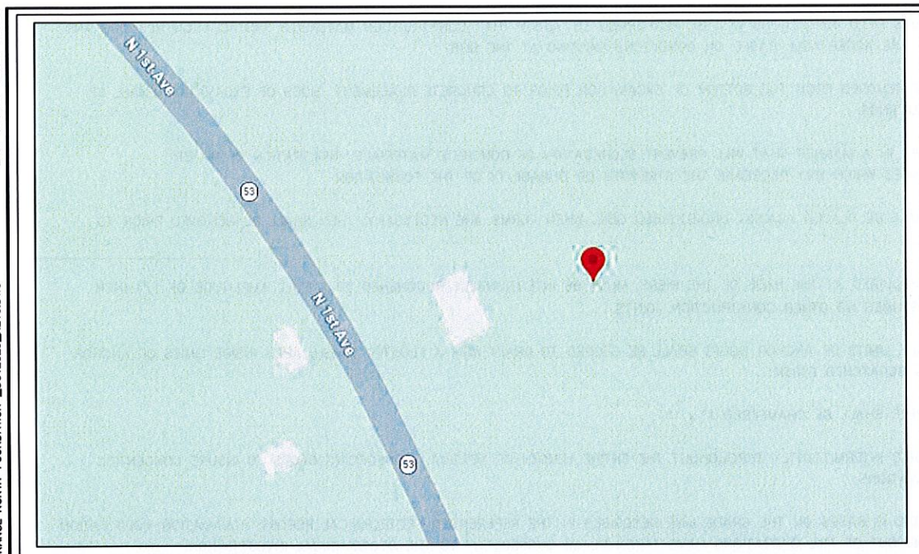

LOCATION MAP

LEAVING BOWMAN FIELD, LOCATED AT 3345 ROGER E. SCHUPP STREET, LOUISVILLE, KENTUCKY 40205, BEGIN BY TRAVELING TOWARD KY-155 SOUTH (TAYLORSVILLE ROAD) AND CONTINUE FOR APPROXIMATELY 1.2 MILES TO ACCESS I-264 EAST. PROCEED ALONG I-264 EAST AND MERGE ONTO I-71 NORTH, CONTINUING FOR APPROXIMATELY 22.2 MILES TOWARD LA GRANGE.

TAKE EXIT 22 FROM I-71 NORTH ONTO KY-53 NORTH/SOUTH 1ST AVENUE IN LA GRANGE. TURN LEFT ONTO KY-53 NORTH/SOUTH 1ST AVENUE AND CONTINUE FOR APPROXIMATELY 0.5 MILES, PASSING AUTOZONE AUTO PARTS ON THE LEFT. CONTINUE STRAIGHT ON KY-53 NORTH/SOUTH 1ST AVENUE TO THE DESTINATION, WHICH WILL BE LOCATED ON THE RIGHT.

DRIVING DIRECTIONS

PROJECT INFORMATION

SITE NAME:
LV LAGRANGE NORTH
SITE NUMBER:
KY0120

PROJECT LOCATION:
2221 N HWY 53, LAGRANGE, KY 40031,
(OLDHAM COUNTY)

LATITUDE	N 38° 25' 20.77"
LONGITUDE	W 85° 22' 51.33"
GROUND ELEVATION	787' AMSL

SITE CONSTRUCTION MANAGER:	
NAME	TOWERCO
ADDRESS	5000 VALLEYSTONE DRIVE
CITY, STATE, ZIP	CARY, NC 27519
CONTACT	ADAM MAJECKI
PHONE	(919) 653-5747
SITE APPLICANT:	
NAME	TOWERCO
ADDRESS	5000 VALLEYSTONE DRIVE, SUITE 200
CITY, STATE, ZIP	CARY, NC 27519
CONTACT	LESLEY CORDILEONE
PHONE	(813) 503-2333
SURVEYOR:	
NAME	POWER OF DESIGN GROUP, LLC
ADDRESS	11490 BLUEGRASS PARKWAY
CITY, STATE, ZIP	LOUISVILLE, KY 40299
CONTACT	MARK E. PATTERSON, PLS
PHONE	(502) 437-5252
CIVIL ENGINEER:	
NAME	TELETEK STRUCTURES
ADDRESS	1600 KING ST. N.
CITY, STATE, ZIP	ST. JACOBS, ON, N0B 2N0
CONTACT	SHAWN HOFFMEYER
PHONE	(519) 206-2060
GEOTECHNICAL ENGINEER:	
NAME	POWER OF DESIGN GROUP, LLC
ADDRESS	11490 BLUEGRASS PARKWAY
CITY, STATE, ZIP	LOUISVILLE, KY 40299
CONTACT	AARON HERKENHOFF, P.E
PHONE	(419) 733-3347
ELECTRICAL ENGINEER:	
NAME	N/A
ADDRESS	N/A
CITY, STATE, ZIP	N/A
CONTACT	N/A
PHONE	N/A
PROPERTY INFORMATION:	
NAME	DAVID & TERESA POFF TRUSTEES OF TRIPLE J TRUST
ADDRESS	3321 OLD SLIGO ROAD
CITY, STATE, ZIP	LAGRANGE, KY 40031
CONTACT	DAVID POFF
PHONE	(502) 639-9445
UTILITIES:	
POWER COMPANY	KENTUCKY UTILITIES COMPANY
CONTACT	N/A
PHONE	(800) 635-7421
PHONE# NEAR SITE	N/A

CONTACT INFORMATION

PROJECT DESCRIPTION:
FOUNDATION DESIGN DRAWINGS

TOWER TYPE:
185' MONOPOLE

PROJECT INFORMATION

SHEET	DESCRIPTION	REV
KY0120-T1	TITLE SHEET	0
KY0120-N1	PROJECT NOTES	0
KY0120-B1	BILL OF MATERIALS	0
KY0120-F1	FOUNDATION INSTALLATION DETAILS	0

INDEX OF SHEETS

811
Know what's **below.**
Call 811 before you dig.

CALL 48 HOURS BEFORE YOU DIG

Raphael Mohamed

TELETEK STRUCTURES	3746	0	ISSUED FOR CONSTRUCTION	2026-10-06	SJ	PL
PREPARED BY.	FILE No.	REV.	DESCRIPTION	DATE	DWN BY	CHK BY

TowerCo
5000 VALLEYSTONE DRIVE
CARY, NC 27519
(919) 653-5708

TELETEK STRUCTURES

SITE : **LV LAGRANGE NORTH**
CODE : **KY0120 [ENGTEL-2193]**
DRAWING TITLE : TITLE SHEET

SCALE :	NONE
DATE :	2026-10-06
DRAWN BY :	SJ
APPROVED BY :	SH
FILE No :	3746
DRAWING No :	**KY0120 -T1**

LAST UPDATE : 2026-10-05
S:\TELETEK JOB FILES\JOBS 3701-3750\3746 - TOWERCO - KY0120 LV LAGRANGE NORTH\DETAILING\CONSTRUCTION\3746-FOUNDATION\3746-FOUNDATION_OCT2026_REV0.DWG

GENERAL NOTES:

1. WORK SHALL BE IN ACCORDANCE WITH LOCAL CODES, SAFETY REGULATIONS AND UNLESS OTHERWISE NOTED, THE LATEST REVISION OF ACI 318, 'BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE". PROCEDURES FOR THE PROTECTION OF EXCAVATIONS, EXISTING CONSTRUCTION AND UTILITIES SHALL BE ESTABLISHED PRIOR TO FOUNDATION INSTALLATION.

2. ALL WORK PRESENTED ON THESE DRAWINGS MUST BE COMPLETED BY THE CONTRACTOR UNLESS NOTED OTHERWISE. THE CONTRACTOR MUST HAVE CONSIDERABLE EXPERIENCE IN PERFORMANCE OF WORK SIMILAR TO THAT DESCRIBED HEREIN. BY ACCEPTANCE OF THIS ASSIGNMENT, THE CONTRACTOR IS ATTESTING THAT HE DOES HAVE SUFFICIENT EXPERIENCE AND ABILITY, THAT HE IS KNOWLEDGEABLE OF THE WORK TO BE PERFORMED AND THAT HE IS PROPERLY LICENSED AND PROPERLY REGISTERED TO DO THIS WORK IN THE STATE.

3. ALL PRODUCT MANUFACTURER'S INSTRUCTIONS SHALL BE FOLLOWED EXACTLY AND SHALL SUPERCEDE ANY CONFLICTING NOTES ENCLOSED HEREIN.

4. IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO DETERMINE MODIFICATION PROCEDURE AND SEQUENCE TO INSURE THE SAFETY OF THE STRUCTURE AND IT'S COMPONENT PARTS DURING ERECTION AND/OR FIELD MODIFICATIONS. THIS INCLUDES, BUT IS NOT LIMITED TO, THE ADDITION OF TEMPORARY BRACING, GUYS OR TIE-DOWNS THAT MAY BE NECESSARY, SUCH MATERIAL SHALL BE REMOVED AND SHALL REMAIN THE PROPERTY OF THE CONTRACTOR AFTER THE COMPLETION OF THE PROJECT.

5. ALL DIMENSIONS, ELEVATIONS, AND EXISTING CONDITIONS SHOWN ON THE DRAWINGS SHALL BE FIELD VERIFIED BY THE CONTRACTOR PRIOR TO BEGINNING ANY MATERIALS ORDERING, FABRICATION OR CONSTRUCTION WORK ON THIS PROJECT. CONTRACTOR SHALL NOT SCALE CONTRACT DRAWINGS IN LIEU OF FIELD VERIFICATION. ANY DISCREPANCIES SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE OWNER AND THE OWNER'S ENGINEER. THE DISCREPANCIES MUST BE RESOLVED BEFORE THE CONTRACTOR IS TO PROCEED WITH THE WORK. THE CONTRACT DOCUMENTS DO NOT INDICATE THE METHOD OF CONSTRUCTION. THE CONTRACTOR SHALL SUPERVISE AND DIRECT THE WORK AND SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, AND PROCEDURES. OBSERVATION VISITS TO THE SITE BY THE OWNER AND/OR THE ENGINEER SHALL NOT INCLUDE INSPECTION OF THE PROTECTIVE MEASURES AND PROCEDURES.

6. ALL MATERIALS AND EQUIPMENT FURNISHED SHALL BE NEW AND OF GOOD QUALITY, FREE FROM FAULTS AND DEFECTS AND IN CONFORMANCE WITH THE CONTRACT DOCUMENTS. ANY AND ALL SUBSTITUTIONS MUST BE PROPERLY APPROVED AND AUTHORIZED IN WRITING BY THE OWNER AND ENGINEER PRIOR TO INSTALLATION. THE CONTRACTOR SHALL FURNISH SATISFACTORY EVIDENCE AS TO THE KIND AND QUALITY OF THE MATERIALS AND EQUIPMENT BEING SUBSTITUTED.

7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR INITIATING, MAINTAINING AND SUPERVISING ALL SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK. THE CONTRACTOR IS RESPONSIBLE FOR INSURING THAT THIS PROJECT AND RELATED WORK COMPLIES WITH ALL APPLICABLE AND LOCAL, STATE, AND FEDERAL SAFETY CODES AND REGULATIONS GOVERNING THIS WORK.

8. CONCRETE MATERIALS SHALL CONFORM TO THE APPROPRIATE STATE REQUIREMENTS FOR EXPOSED STRUCTURAL CONCRETE.

9. PROPORTIONS OF CONCRETE MATERIALS SHALL BE SUITABLE FOR THE INSTALLATION METHOD UTILIZED AND SHALL RESULT IN DURABLE CONCRETE FOR RESISTANCE TO LOCAL ANTICIPATED AGGRESSIVE ACTIONS. THE DURABILITY REQUIREMENTS OF ACI 318 CHAPTER 4 SHALL BE SATISFIED BASED ON THE CONDITIONS EXPECTED AT THE SITE. AS A MINIMUM, CONCRETE SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 4,500 PSI IN 28 DAYS.

10. MAXIMUM SIZE OF AGGREGATE SHALL NOT EXCEED SIZE SUITABLE FOR INSTALLATION METHOD UTILIZED OR 1/3 CLEAR DISTANCE BEHIND OR BETWEEN REINFORCING. MAXIMUM SIZE MAY BE INCREASED TO 2/3 CLEAR DISTANCE PROVIDED WORKABILITY AND METHODS OF CONSOLIDATION SUCH AS VIBRATING WILL PREVENT HONEYCOMBS OR VOIDS.

11. REINFORCEMENT SHALL BE DEFORMED AND CONFORM TO THE REQUIREMENTS OF ASTM A615 GRADE 60 UNLESS OTHERWISE NOTED. SPLICES IN REINFORCEMENT SHALL NOT BE ALLOWED UNLESS OTHERWISE INDICATED.

12. WELDING IS PROHIBITED ON REINFORCING STEEL AND EMBEDMENTS.

13. MINIMUM CONCRETE COVER FOR REINFORCEMENT SHALL BE 3 INCHES (76mm) UNLESS OTHERWISE NOTED. APPROVED SPACERS SHALL BE USED TO INSURE A 3 INCH (76mm) MINIMUM COVER ON REINFORCEMENT.

14. CONCRETE COVER FROM TOP OF FOUNDATION TO ENDS OF VERTICAL REINFORCEMENT SHALL NOT EXCEED 3 INCHES (76Mmm) NOR BE LESS THAN 2 INCHES (51mm).

15. FOUNDATION DEPTH INDICATED IS BASED ON THE GRADE LINE DESCRIBED IN THE REFERENCED GEOTECHNICAL REPORT. FOUNDATION MODIFICATION MAY BE REQUIRED IN THE EVENT CUT OR FILL OPERATIONS HAVE TAKEN PLACE SUBSEQUENT TO THE GEOTECHNICAL INVESTIGATION.

16. FOUNDATION DESIGN ASSUMES THE RECOMMENDATIONS IN THE REFERENCED GEOTECHNICAL REPORT CONCERNING VERIFICATION OF SUBSURFACE CONDITIONS ARE IMPLEMENTED PRIOR TO PLACEMENT OF CONCRETE.

17. FOUNDATION INSTALLATION SHALL BE SUPERVISED BY PERSONNEL KNOWLEDGEABLE AND EXPERIENCED WITH THE PROPOSED FOUNDATION TYPE. CONSTRUCTION SHALL BE IN ACCORDANCE WITH GENERALLY ACCEPTED INSTALLATION PRACTICES.

18. FOUNDATION DESIGN ASSUMES INSTALLATION PROCEDURES WILL INCORPORATE THE PROCEDURES RECOMMENDED IN THE REFERENCED GEOTECHNICAL REPORT.

19. FOUNDATION DESIGN ASSUMES FIELD INSPECTIONS WILL BE PERFORMED TO VERIFY THAT CONSTRUCTION MATERIALS, INSTALLATION METHODS AND ASSUMED DESIGN PARAMETERS ARE ACCEPTABLE BASED ON CONDITIONS EXISTING AT THE SITE.

20. LOOSE MATERIAL SHALL BE REMOVED FROM THE BOTTOM OF EXCAVATION PRIOR TO CONCRETE PLACEMENT. SIDES OF EXCAVATION SHALL BE ROUGH AND FREE OF LOOSE CUTTINGS.

21. CONCRETE SHALL BE PLACED IN A MANNER THAT WILL PREVENT SEGREGATION OF CONCRETE MATERIALS, INFILTRATION OF WATER OR SOIL AND OTHER OCCURRENCES WHICH MAY DECREASE THE STRENGTH OR DURABILITY OF THE FOUNDATION.

22. CONCRETE PREFERABLY SHALL BE PLACED AGAINST UNDISTURBED SOIL. WHEN FORMS ARE NECESSARY, THEY SHALL BE REMOVED PRIOR TO PLACING STRUCTURAL BACKFILL

23. CONSTRUCTION JOINTS, IF REQUIRED AT THE BASE OF THE PIERS, MUST BE INTENTIONALLY ROUGHENED TO A FULL AMPLITUDE OF 1/4 INCH (6mm). FOUNDATION DESIGN ASSUMES NO OTHER CONSTRUCTION JOINTS.

24. TOP OF FOUNDATION OUTSIDE LIMITS OF ANCHOR BOLTS SHALL BE SLOPED TO DRAIN WITH A FLOATED FINISH. AREA INSIDE LIMITS OF ANCHOR BOLTS SHALL BE LEVEL WITH A SCRATCHED FINISH.

25. EXPOSED EDGES OF CONCRETE SHALL BE CHAMFERED 1" x 1".

26. SPACERS SHALL BE ATTACHED INTERMITTENTLY THROUGHOUT THE ENTIRE LENGTH OF VERTICAL REINFORCING CAGES TO INSURE CONCENTRIC PLACEMENT OF CAGES IN EXCAVATIONS.

27. FOUNDATION DEPTH INDICATED IS BASED ON THE GRADE LINE DESCRIBED IN THE REFERENCED GEOTECHNICAL REPORT. FOUNDATION MODIFICATION MAY BE REQUIRED IN THE EVENT CUT OR FILL OPERATIONS HAVE TAKEN PLACE SUBSEQUENT TO THE GEOTECHNICAL INVESTIGATION.

28. FOR FOUNDATION INSTALLATION TOLERANCES SEE STRUCTURE ASSEMBLY DRAWING.

29. FREE FALL CONCRETE MAY BE USED PROVIDED FALL IS VERTICAL DOWN WITHOUT HITTING SIDES OF EXCAVATION, FORMWORK, REINFORCING BARS, FORM TIES, CAGE BRACING OR OTHER OBSTRUCTIONS. UNDER NO CIRCUMSTANCES SHALL CONCRETE FALL THROUGH WATER.

30. FOUNDATION DESIGN ASSUMES CASING, IF USED, WILL NOT BE LEFT IN PLACE. EQUIPMENT, PROCEDURES, AND PROPORTIONS OF MATERIALS SHALL INSURE CONCRETE WILL NOT BE ADVERSELY DISTURBED UPON CASING REMOVAL.

31. DRILLING FLUID, IF USED, SHALL BE FULLY DISPLACED BY CONCRETE AND SHALL NOT BE DETRIMENTAL TO CONCRETE OR SURROUNDING SOIL. CONTAMINATED CONCRETE SHALL BE REMOVED FROM TOP OF FOUNDATION AND REPLACED WITH FRESH CONCRETE.

CONSTRUCTION INSPECTION NOTES:

1. FOUNDATION AND GEOTECHNICAL INSPECTIONS: A THIRD PARTY INSPECTION SHALL BE PERFORMED TO VERIFY:
A. PARAMETERS IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE GEOTECHNICAL REPORT FOR THE SITE
B. FOUNDATION DIMENSIONS
C. REINFORCING STEEL GRADE, SIZE, CONDITION, SUPPORT, PLACEMENT AND COVER
D. CONCRETE MIX DESIGN DOCUMENTATION MATCHES STRENGTH AND DURABILITY REQUIREMENTS
E. CONCRETE TESTS REQUIRED TO BE PERFORMED PRIOR TO PLACEMENT OF CONCRETE, INCLUDING SLUMP, TEMPERATURE, AIR CONTENT, AND TEST CYLINDERS
F. ANCHOR ROD AND/OR POST-INSTALLED REBAR DIMENSIONS AND PLACEMENT, SIZE, EMBEDMENT DEPTH, PROJECTION ABOVE CONCRETE, ORIENTATION, PATTERN, AND ALIGNMENT
G. CONDITION OF SUBGRADE IMMEDIATELY PRIOR TO CONCRETE PLACEMENT
H. PROPER CONCRETE PLACEMENT, AVOIDING SEGREGATION OF AGGREGATES, AND CURING
I. STRUCTURAL BACKFILL MATERIAL AND PLACEMENT, INCLUDING MAXIMUM LIFT THICKNESS, MOISTURE CONTENT AND DENSITY.

TELETEK STRUCTURES	3746	0	ISSUED FOR CONSTRUCTION	2026-10-06	SJ	PL
PREPARED BY.	FILE No.	REV.	DESCRIPTION	DATE	DWN BY	CHK BY

TowerCo
5000 VALLEYSTONE DRIVE
CARY, NC 27519
(919) 653-5708
TELETEK STRUCTURES

SITE : **LV LAGRANGE NORTH**

CODE : **KY0120 [ENGTEL-2193]**

DRAWING TITLE :

PROJECT NOTES

SCALE :	NONE
DATE :	2026-10-06
DRAWN BY :	SJ
APPROVED BY :	SH
FILE No :	3746
DRAWING No :	**KY0120 -N1**

S:\TELETEK JOB FILES\JOBS 3701-3750\3746 - TOWERCO - KY0120 LV LAGRANGE NORTH\DETAILING\CONSTRUCTION\3746-FOUNDATION\3746_TOWERCO-KY0120_LV LAGRANGE NORTH-FOUNDATION _OCT2026_REV0.DWG
LAST UPDATE : 2026-10-05

BILL OF MATERIAL - PAD & PIER

MARK NO.	DESCRIPTION	SIZE	QTY
–	4500 PSI MIX	94.6 CY	1
VERT-01	VERTICAL BAR	#10 ASTM A615-60 x 7'-11"	31
TIE-01	TIE	#5 ASTM A615-60 x 25'-11"	14
HORIZ-01	HORIZONTAL REBAR - U SHAPE TOP OF PIER	#3 ASTM A615-60 x 8'-8"	20
HORIZ-02	HORIZONTAL REBAR - STRAIGHT PAD	#10 ASTM A615-60 x 27'-6"	112

APPLICABLE CODES AND STANDARDS:

1. ANSI/TIA-222-G STRUCTURAL STANDARDS FOR ANTENNA SUPPORTING STRUCTURES AND ANTENNAS.
2. 2015 INTERNATIONAL BUILDING CODE
3. 2018 KENTUCKY BUILDING CODE
4. ACI 318: AMERICAN CONCRETE INSTITUTE, BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE, 318-19.
5. CRSI: CONCRETE REINFORCING STEEL INSTITUTE, MANUAL OF STANDARD PRACTICE, LATEST EDITION.
6. AISC: AMERICAN INSTITUTE OF STEEL CONSTRUCTION, MANUAL OF STEEL CONSTRUCTION, 13TH EDITION.
7. AWS: AMERICAN WELDING SOCIETY D1.1, STRUCTURAL WELDING CODE, LATEST EDITION.

TELETEK STRUCTURES	3746	0	ISSUED FOR CONSTRUCTION	2026-10-06	SJ	PL
PREPARED BY.	FILE No.	REV.	DESCRIPTION	DATE	DWN BY	CHK BY

TowerCo
5000 VALLEYSTONE DRIVE
CARY, NC 27519
(919) 653-5708

TELETEK STRUCTURES


SITE : **LV LAGRANGE NORTH**

CODE : **KY0120 [ENGTEL-2193]**

DRAWING TITLE :

BILL OF MATERIALS

SCALE :	NONE
DATE :	2026-10-06
DRAWN BY :	SJ
APPROVED BY :	SH
FILE No :	3746
DRAWING No :	KY0120 -B1

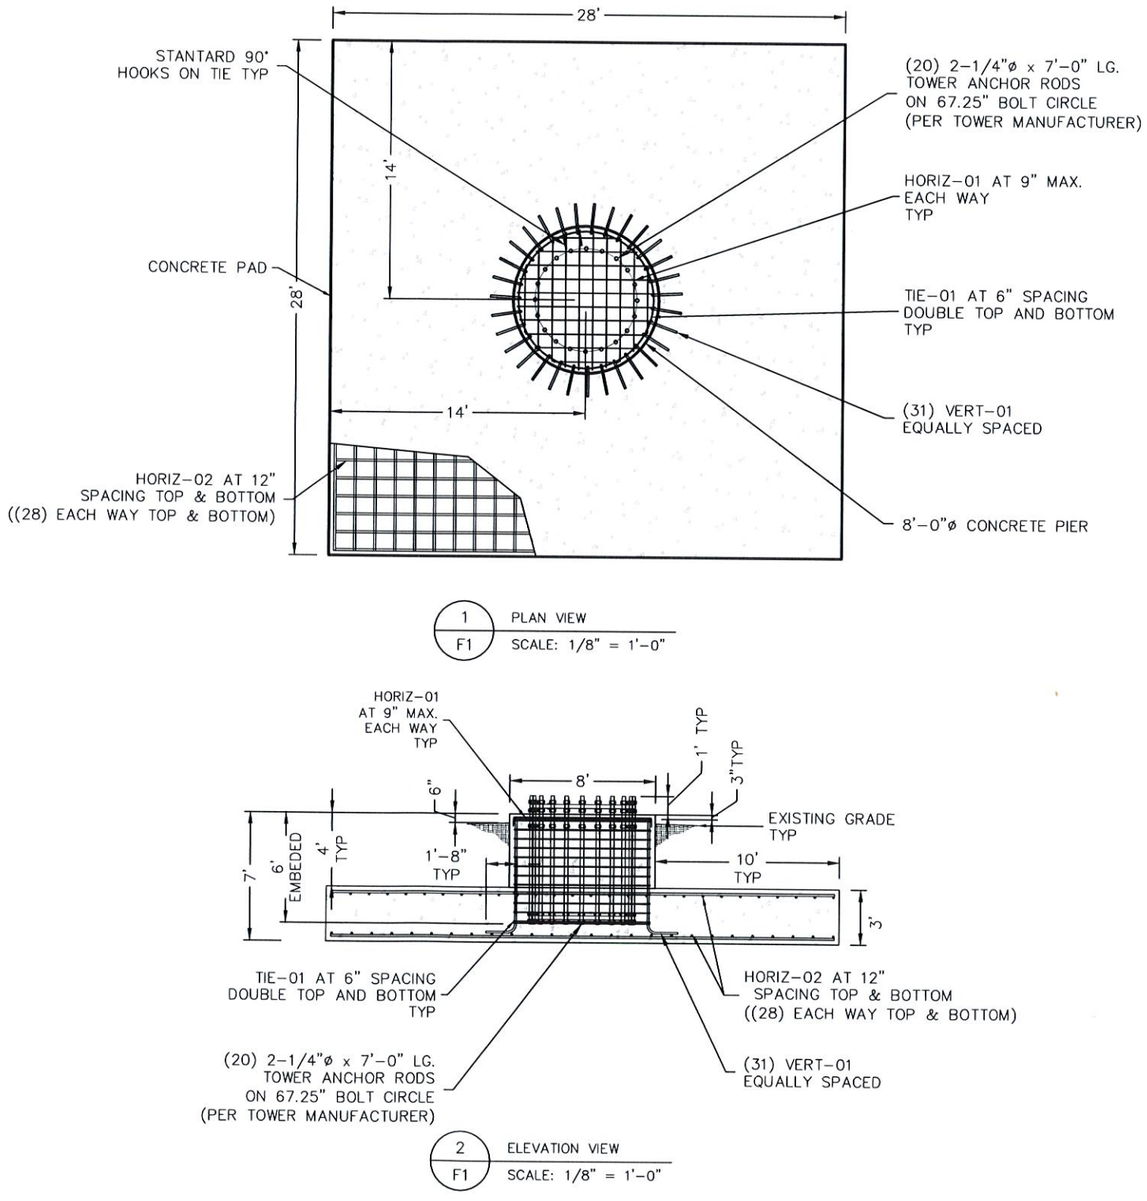

DESIGN NOTES:

TOWER DESIGN DRAWINGS BY SABRE INDUSTIRES DATED 14 APRIL 2026, JOB 26-3885-JDS

WITH DESIGN CRITERIA:

A. TOWER DESIGN CONFIRMS TO ANSI/TIA-222-G
B. BASIC WIND SPEED (NO ICE): 115 MPH PER ASCE 7-10
C. BASIC WIND SPEED (w/ICE): 30 MPH PER ASCE 7-10
D. DESIGN ICE THICKNESS: 0.75 INCH PER ASCE 7-10
E. RISK CATEGORY II
F. EXPOSURE CATEGORY C
G. TOPOGRAPHIC CATEGORY 1

GLOBAL MOMENT, M: 6630.34 ft-kips

GLOBAL AXIAL, P: 83.26 kips

GLOBAL SHEAR, V: 43.02 kips

FOUNDATION NOTES:

FOUNDATION DESIGN HAS BEEN BASED ON GEOTECHNICAL REPORT NO.26-195059 DATED 22 SEPTEMBER 2026 BY POWER OF DESIGN GROUP LLC.

1. CONCRETE SHALL HAVE A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 4,500 PSI.
2. REBAR SHALL CONFORM TO ASTM SPECIFICATION A615.
3. ALL REBAR SHALL HAVE 3 INCHES MINIMUM COVER.
4. AGGREGATE: ASTM C33, 3/4 INCH MAX
5. CEMENT: ASTM C150 TYPE I
6. WATER: CLEAR, POTABLE
7. AIR ENTRAINMENT: ASTM C260, 6%
8. ALL EXPOSED CONCRETE CORNERS SHALL BE CHAMFERED 1 INCH.
9. SEE GEOTECHNICAL REPORT FOR INSTALLATION REQUIREMENTS.

SITE PREPARATION NOTES:

1. THE LIMITS OF THE EXCAVATION SHOULD INCLUDE THE ENTIRE FOUNDATION FOOTPRINT AND EXTEND LATERALLY AT LEAST 4 FEET BEYOND THE OUTSIDE EDGES OF THE FOUNDATION.
2. THE BASE OF THE EXCAVATION SHOULD BE FREE OF ALL ORGANICS AND WOOD DEBRIS.
3. EXCAVATION SLOPES WILL BE NO STEEPER THAN 3 HORIZONTAL TO 1 VERTICAL (3H:1V).
4. THE UPPER 2 FEET OF EXCAVATED MATERIAL IS NOT SUITABLE FOR RE-USE. EXCAVATED MATERIAL BELOW 2 FEET MAY BE USED AS BACKFILL , OUTSIDE OF THE BEARING ZONES. THE FILL SHOULD NOT CONTAIN TOPSOIL, ORGANICS OR DELETERIOUS MATTER. MAXIMUM LOOSE LIFTS SHOULD NOT EXCEED 8 INCHES.
5. GRADE TO BE RAISED AS SHOWN IN DRAWING. FINAL GRADE TO HAVE A 2% SLOPE AWAY FROM CENTER OF FOUNDATION ON ALL SIDES OVER THE PAD. GRADE CAN BE INCREASE TO 8% OUTSIDE OF THE FOUNDATION AREA.
6. MATERIAL TO BE COMPACTED TO 90% MAXIMUM DRY DENSITY OBTAINED FROM ASTM D1557.

TELETEK STRUCTURES	3746	0	ISSUED FOR CONSTRUCTION	2026-10-06	SJ	PL
PREPARED BY.	FILE No.	REV.	DESCRIPTION	DATE	DWN BY	CHK BY

TowerCo
5000 VALLEYSTONE DRIVE
CARY, NC 27519
(919) 653-5708

TELETEK STRUCTURES

SITE : **LV LAGRANGE NORTH**

CODE : **KY0120 [ENGTEL-2193]**

DRAWING TITLE :

FOUNDATION INSTALLATION DETAILS

SCALE :	AS SHOWN
DATE :	2026-10-06
DRAWN BY :	SJ
APPROVED BY :	SH
FILE No :	3746
DRAWING No :	KY0120 -F1

LAST UPDATE : 2026-10-05

S:\TELETEK JOB FILES\JOBS 3701-3750\3746 - TOWERCO - KY0120 LV LAGRANGE NORTH\DETAILING\CONSTRUCTION\3746-FOUNDATION\3746_TOWERCO-KY0120_LV LAGRANGE NORTH-FOUNDATION _OCT2026_REV0.DWG