


## Classification

Class II   
220 to 240VAC  
50Hz


## CCT

4000K/6500K  
CRI: 80 Ra

## Applications

General Lighting  
Office  
Healthcare  
Retail  
Education

## Light Distribution

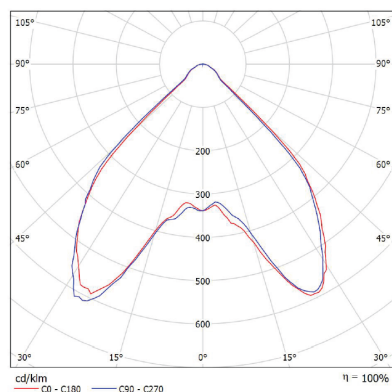


Beam Angle: 90°

## Construction:

Body: Die-Cast Aluminum  
Diffuser: Center Frosted Glass  
Ambient temperature: -10° C to +45° C  
Installation: Recessed  
IP40

## Dimensions

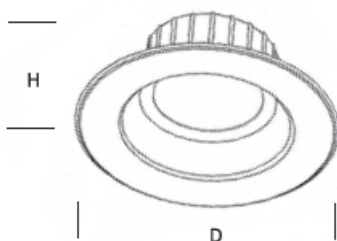

# COB Downlight Libra Series

## Features:

- High performance COB design
- No IR or UV radiation
- Precise light distribution and high lumen output
- Easy to install and to adjust
- Eco-friendly, without mercury and any other hazardous substances
- Aluminum body for good thermal management
- Rated lifetime: 30,000 hours



## Product Variants

Product Code	Wattage	lumens (lm)	lm/W	Dimension: mm (DxH)	Cutout: mm
FEDL20WLIB	20W	1900	95	Ø195x60	Ø175
FEDL30WLIB	30W	2850	95	Ø225x63	Ø205
FEDL40WLIB	40W	3800	95	Ø225x63	Ø205

\*Please do not operate with generator power supply as unregulated voltage and spikes might damage the LED source and driver.