

Classification

Class II 
240VAC 50Hz

CCT


3000K/4000K/6500K

CRI: 80

Applications

General Lighting

Light Distribution

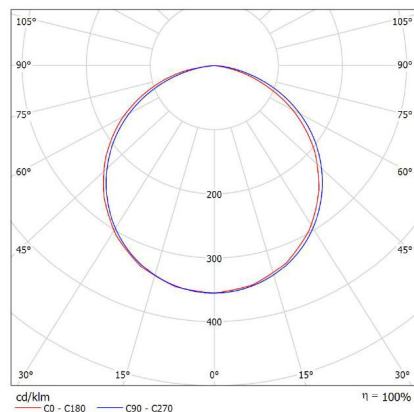

Beam Angle: 330°

Construction:

Body: Aluminum


Diffuser: Glass

Ambient Temperature: 0°C to +50°C

Lamp : T8

IP20

Dimensions

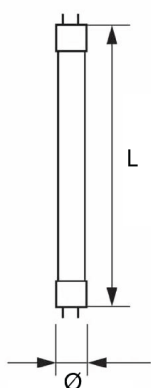

LED Tube T8 Glass

Features:

- Double ends input design
- No IR or UV radiation
- Compliance to photobiological safety requirements
- Eco-friendly, without mercury and hazardous substances
- Rated lifetime: 50,000 hours
- Number of Switching Cycles: 50,000
- Dimmable: No



Product Variants

Product Code	Wattage	lumens (lm)	lm/W	Dimension: mm (ØxL)
FPTL07WT8G	7 W	1190	170	28x600
FPTL11WT8G	11W	1870	170	28x1200
FPTL18WT8G	18W	3060	170	28x1200
FPTL20WT8G	20W	3400	170	28x1500

*Please do not operate with generator power supply as unregulated voltage and spikes might damage the LED source and driver.