

COB Downlight Gemini 05

- IP65
- Class II
- AC220-240V
- Recessed Ceiling
- Highly recyclable
- 50k Hours Lifetime
- Dimming Optional: DALI, Phase Cut & 1/0-10V



Product Features:

- ✓ Sleek and Space-Saving structure
- ✓ Multiple Configurations for Optics and Decorative Trims.
- ✓ Advanced Heat-Sink Technology for Superior Heat Mangament
- ✓ Extended Durability with a Lifespan of Up to 50,000 Hours L80

Product Specifications:



- ✓ Housing: Die-Cast Aluminum Body
- ✓ Diffuser: PMMA lens.
- ✓ Outstanding Temp: 0~45°C
- ✓ Delivered Lumen Output: 100lm/W
- ✓ Color Render Index > 90
- ✓ Power Factor > 0.9

Model Selection

Model No.	Wattage	Lumen	Cut Out (mm)	Dimension (mm)DxH
DLG5-010	10 W	1000 lm	75	85x55
DLG5-015	15 W	1500 lm	95	105x63
DLG5-020	20 W	2000 lm	95	105x63
DLG5-025	25 W	2500 lm	120	130x77

Selectable Options

CCT	Beam Angle	Housing	Trim
<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 6500K	<input type="checkbox"/> 20° <input type="checkbox"/> 40° <input type="checkbox"/> 60°	<input type="checkbox"/> Grey	<input type="checkbox"/> White <input type="checkbox"/> Black

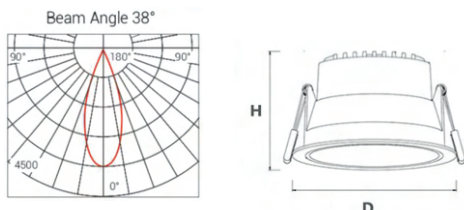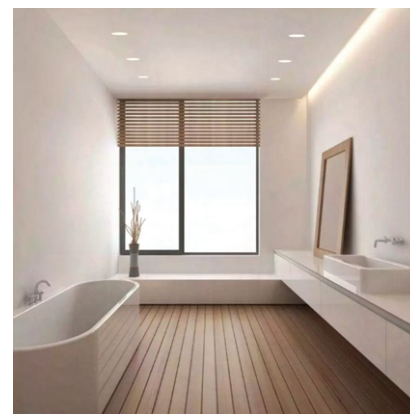

Reflector Color

