








COB Downlight Gemini 06

-  IP65
-  Class II
-  AC220-240V
-  Surface Ceiling
-  Highly recyclable
-  50k Hours Lifetime
-  Dimming Optional: DALI, Phase Cut & 1/0-10V



Product Features:

- ✓ Sleek and Space-Saving structure
- ✓ Multiple Configurations for Optics and Decorative Trims.
- ✓ Advanced Heat-Sink Technology for Superior Heat Management
- ✓ Extended Durability with a Lifespan of Up to 50,000 Hours L80






Product Specifications:



- ✓ Housing: Die-Cast Aluminum Body
- ✓ Diffuser: PMMA lens.
- ✓ Outstanding Temp: 0~45°C
- ✓ Delivered Lumen Output: 100lm/W
- ✓ Color Render Index > 90

Model Selection

Model No.	Wattage	Lumen	Dimension (mm)DxH
DLG6-010	10 W	1000 lm	73x108
DLG6-020	20 W	2000 lm	93x118
DLG6-030	30 W	3000 lm	113x136
DLG6-040	40 W	4000 lm	140x150

Selectable Options

CCT	Beam Angle	Housing
 3000K	 20°	<input type="checkbox"/> White
 4000K	 40°	<input checked="" type="checkbox"/> Black
<input type="checkbox"/> 6500K	 60°	

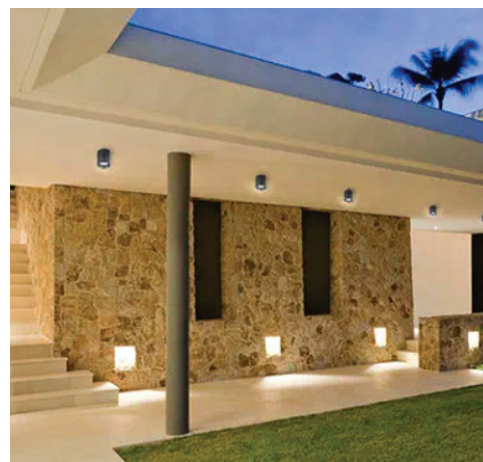

Reflector Color

