

HighBay Light Diamond

- IP65
- Class I
- AC220-240V
- Suspended
- Highly recyclable
- 50K hours
- Dimming Options




Product Features:

- ✓ Product design ensures protection against water and dust ingress, making it suitable for outdoor and indoor use in various weather conditions.
- ✓ Offers excellent energy efficiency with a luminous efficacy of 140 lumens per watt (lm/W), ensuring bright and uniform lighting while minimizing energy consumption.
- ✓ Constructed with high-quality die-cast aluminum housing, providing robustness and durability to withstand harsh industrial environments, ensuring long-term reliability and performance.
- ✓ Ideal for illuminating large industrial spaces such as warehouses, manufacturing facilities, gyms, and hangars, providing efficient and effective lighting solutions for various industrial environments.
- ✓ Extended Durability with a Lifespan of Up to 50,000 Hours L80.

Product Specifications:

- ✓ Housings: Die-Cast Aluminum
- ✓ Diffuser: Clear polycarbonate
- ✓ Outstanding Temp: -30~50°C
- ✓ Delivered Lumen Output: 140lm/W / Optional 170lm/W
- ✓ Color Render Index > 70
- ✓ Power Factor > 0.95

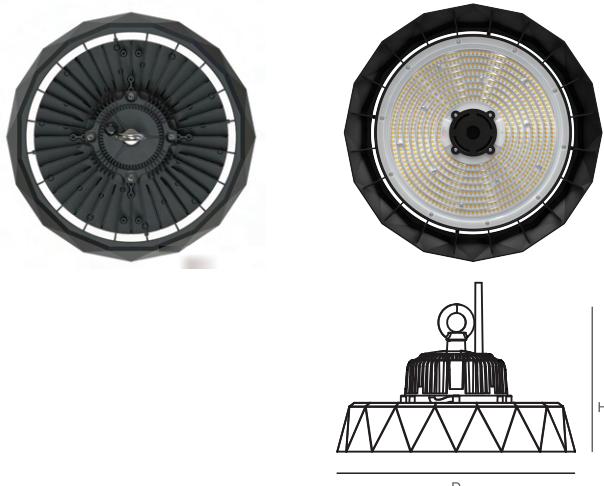

Model Selection

Model No.	Wattage	Lumen	Dimension (mm)DxH
HBDM-050	50 W	7000 lm	ø262x176
HBDM-100	100 W	14000 lm	ø262x176
HBDM-150	150 W	21000 lm	ø301x175
HBDM-200	200 W	28000 lm	ø350x175
HBDM-240	240 W	33600 lm	ø350x175

Selectable Options

CCT	Beam Angle	Body Color
4000K	60°	Black
6500K	90°	
	120°	

