

Linear HighBay LH02

-  IP65
-  Class I
-  AC220-240V
-  Bracket Ceiling
-  Highly recyclable
-  50k Hours



Product Features:



- ✓ Product design ensures protection against water and dust ingress, making it suitable for outdoor and indoor use in various weather conditions.
- ✓ Offers excellent energy efficiency with a luminous efficacy of 170 lumens per watt (lm/W), ensuring bright and uniform lighting while minimizing energy consumption.
- ✓ Constructed with high-quality die-cast aluminum housing, providing robustness and durability to withstand harsh industrial environments, ensuring long-term reliability and performance.
- ✓ Ideal for illuminating large industrial spaces such as warehouses, manufacturing facilities, gymnasiums, and hangars, providing efficient and effective lighting solutions for various industrial environments
- ✓ Extended Durability with a Lifespan of Up to 50,000 Hours L80

Product Specifications:

- ✓ Housing: Aluminum Body
- ✓ Diffuser: Clear PC Lens
- ✓ Outstanding Working Temp: -30~50°C
- ✓ Delivered Lumen output: 170lm/W
- ✓ Color Render Index > 70

Model Selection

Model No.	Wattage	Lumen	Dimension (mm)LxWxH
LH02-100	100 W	17000 lm	467x223x181.5
LH02-135	135 W	22950 lm	467x223x181.5
LH02-160	160 W	27200 lm	467x223x181.5

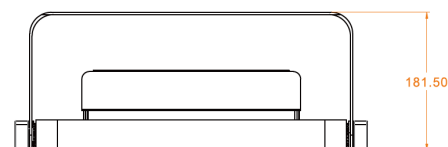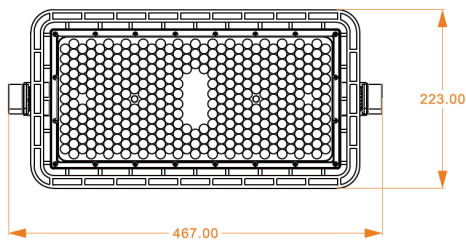

Options: CCT, Finish & Beam Angle

CCT	Beam Angle	Housing
 3000K	 30°	 Grey
 4000K	 60°	 Black
 6500K	 90°	

