








# Obstruction Light OL01

-  IP65
-  Class I
-  AC90-265V 50/60Hz, DC 12V-48V
-  Surface Installation
-  Highly recyclable
-  2 Years Warranty
-  Lighting & Surge Protection


## Product Features:

- ✓ Emits a bright red flashing signal that is highly visible, ensuring safe navigation and compliance with aviation and marine safety standards.
- ✓ Provides complete protection against dust and water jets, making it suitable for use in harsh outdoor environments and ensuring reliable performance in all weather conditions.
- ✓ Built with high quality materials that withstand extreme temperatures, UV radiation, and mechanical impacts, ensuring long-lasting durability.
- ✓ Capable of operating effectively in a wide range of temperatures, ensuring reliable performance in both hot and cold climates.



## Technical Specifications:

Code	OL01-03
wattage	≤ 3 W
Light Intensity	Type B ≥ 32. 5cd, Type A ≥ 10cd
Working Mode	Steady Buring / Flashing 20 times / Minute
Horizontal Output	360°
Vertical Divergence	10°
Optional Emitting Light Colors	Red
Optically Controlled Ambient Brightness	50 / 100 Lux
Ambient Temperature	-40°C~70°C
Anty Wind Ability	120 m/s
Power Factor	>0.9
Base Body	Aluminum Casting
Diffuser and Lens	PC
Dimension (mm) DxH	136x220

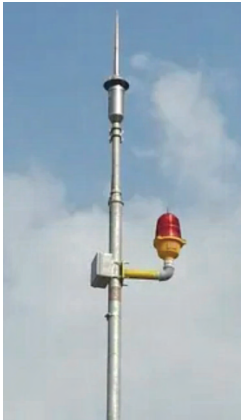

## Application:

- Runway
- Heliport
- Towers
- Tower Crane
- Bridge

## Dimensions:

