

## Solar Flood Light SFL1



IP65



Surface Mounted



Highly Recyclable



20K Hours



4-6 Hours Charging Time




Lighting Control Sensor



### Product Features:

- ✓ Equipped with LifePO4 Battery
- ✓ Lighting area up to 150sqm
- ✓ Up to 3 years warranty
- ✓ Up to 60 hours running time according to different modes
- ✓ 5 meters cable
- ✓ 360 degree adjustable flood light bracket
- ✓ 270 degree adjustable solar panel bracket
- ✓ 4 to 6 hours for full charge

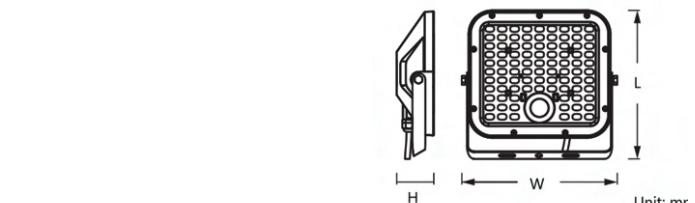

### Product Specifications:

- ✓ Housing: ABS fireproof
- ✓ Diffuser: PC anti-UV fireproof
- ✓ Outstanding Working Temp: -20 to +50°C
- ✓ Delivered Lumen Output: 160lm/W
- ✓ Color Render Index > 80

### Model Selection

Model No.	Wattage	Lumen	Battery	Solar Panel Wattage	Product Dimension (mm)LxWxH
SFL-010	10 W	1500 lm	Li-ion3.7V, 3600mAh	4.5 W	180x182x50
SFL-020	20 W	2800 lm	Li-ion3.7V, 7200mAh	10.5 W	180x182x50
SFL-030	30 W	4800 lm	Li-ion3.7V, 6000mAh	12.5 W	180x182x50

### Selectable Options

CCT	Beam Angle	Body Color
3000K	120°	Black
4000K		
6500K		

