FRATER®
SPAIN SINCE 1999

IEC60598 LM79 / LM80 COMPLIANCE | Glowing Wire Test - 850°C | SDCM <3 | CE COMPLIANCE | RoHS COMPLIANT


LED Weatherproof Galaxy I

- IP65
- Class I
- AC220-240V
- Surface / Suspended Mounted Luminaire
- Highly recyclable
- 50k Hours Lifetime
- DALI, Phase Cut & 1/0-10V Dimming Options
- Suitable for T8 Tubes



Product Features:

- ✓ Product design ensures protection against water and dust ingress making it suitable for outdoor and indoor use in various weather conditions.
- ✓ Designed to accommodate T8 tubes, offering versatility and ease of maintenance with widely available and replaceable lighting components.
- ✓ Ideal for parking lots, garages, driveways, and other outdoor areas where reliable and energy-efficient lighting is essential for safety and visibility.
- ✓ Designed for retrofit applications, allowing for easy replacement of existing fixtures with minimal modifications, reducing installation time and costs.

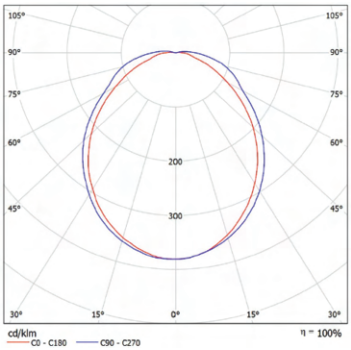

Product Specifications:

- ✓ Housing: PC
- ✓ Diffuser : PC Transparent
- ✓ Powder Coated CRC Steel Steel Plate
- ✓ 304 SS Clips
- ✓ Light Source: Suitable for T8 LED Tube, 2,4 & 5 Feet
- ✓ Outstanding Temp : -20~+50°C


Model Selection


Model No.	Number of Tube	Dimension (mm)LxWxH
WPG1-S2F	01	660x100x100
WPG1-D2F	02	660x165x100
WPG1-S4F	01	1265x100x100
WPG1-D4F	02	1265x165x100
WPG1-S5F	01	1560x100x100
WPG1-D5F	02	1560x165x100

Options:
T8 Tube, CCT, Finish & Beam Angle

T8 Tube	CCT	Housing	Beam Angle
9 W	3000K	Grey	120°
18 W	4000K		
22 W	6500K		







The present techincal data sheet and all information contained is property of ***FRATER***®. All rights reserved
FRATER® may implement minor modifications in product specifications, construction, or model numbers to align with continous improvements and LED technology advancements, without prior notice.

Last Update: Oct 2026