

## Classification

Class II 

240VAC 50Hz

## CCT


4000K / 6500K

CRI: 80

## Applications

General Lighting

## Light Distribution

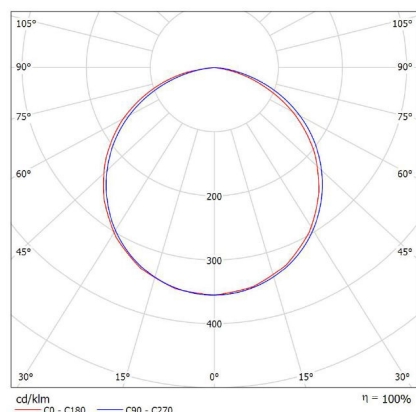

Beam Angle: 330°

## Construction:

Body: Aluminum


Diffuser: Glass

Ambient Temperature: 0°C to +45°C

Lamp : T8

IP20

## Dimensions

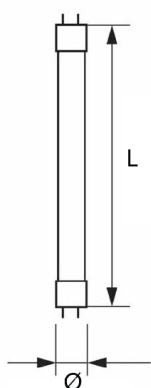

# LED Tube T8 Glass

## Features:

- Double ends input design
- No IR or UV radiation
- Compliance to photobiological safety requirements
- Eco-friendly, without mercury and hazardous substances
- Rated lifetime: 20,000 hours
- Number of Switching Cycles: 20,000
- Dimmable: No
- Optional : Radar Motion Sensor



## Product Variants

| Product Code | Wattage | lumens (lm) | lm/W | Dimension:<br>mm (ØxL) |
|--------------|---------|-------------|------|------------------------|
| FRTL9WT8G    | 09W     | 1080        | 120  | 28x600                 |
| FRTL18WT8G   | 18W     | 2160        | 120  | 28x1200                |
| FRTL30WT8G   | 30W     | 3600        | 120  | 28x1200                |
| FRTL22WT8G   | 22W     | 2640        | 120  | 28x1500                |

\*Please do not operate with generator power supply as unregulated voltage and spikes might damage the LED source and driver.