

Classification

Class II 

240VAC 50Hz

CCT


4000K / 6500K

CRI: 80

Applications

General Lighting

Light Distribution

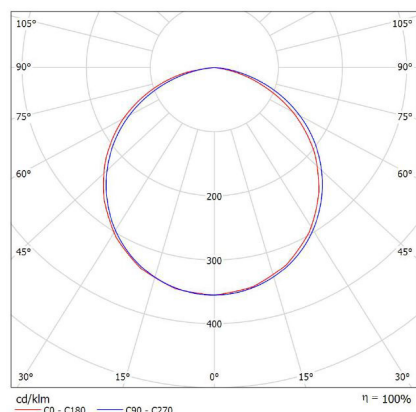

Beam Angle: 330°

Construction:

Body: Aluminum


Diffuser: Glass

Ambient Temperature: 0°C to +45°C

Lamp : T8

IP20

Dimensions

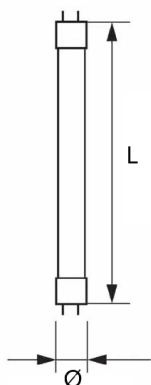

FRATER®

SPAIN SINCE 1999

ECO

LED Tube T8 Glass

Features:

- Double ends input design
- No IR or UV radiation
- Compliance to photobiological safety requirements
- Eco-friendly, without mercury and hazardous substances
- Rated lifetime: 20,000 hours
- Number of Switching Cycles: 20,000
- Dimmable: No
- Optional Motion Sensor : On-Off / 3-Step Dimming 100%-30%-10%.



Product Variants

Product Code	Wattage	lumens (lm)	lm/W	Dimension: mm (ØxL)
FRTL9WT8G	09W	1080	120	28x600
FRTL18WT8G	18W	2160	120	28x1200
FRTL30WT8G	30W	3600	120	28x1200
FRTL22WT8G	22W	2640	120	28x1500

*Please do not operate with generator power supply as unregulated voltage and spikes might damage the LED source and driver.